


Características técnicas


PARA MONTAJE EN BARRA OMEGA DIN EN 50022.
FABRICADAS EN PLÁSTICO ABS IGNÍFUGO COLOR GRIS - RAL 7035
ORIFICIOS PRE-TROQUELADOS
BASE Y CUBIERTA ACOPLABLES CON CLIP DE FIJACIÓN Y TORNILLOS

Technical characteristics


FOR ASSEMBLY IN TRACK OMEGA DIN 50022
MADE OF FIRE RESISTANT ABS PLASTIC COLOR GRAY - RAL 7035
PRE-PUNCHED DRIFICES
BASE AND COVER ATTACHABLE WITH FIXATION PAPER CLIP AND SCREWS

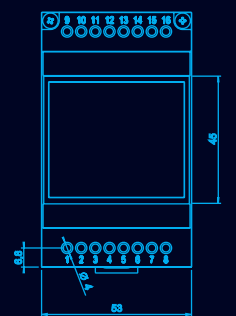


16 conexiones / connections

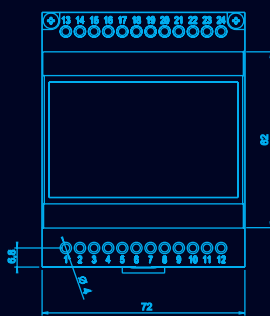

24 conexiones / connections

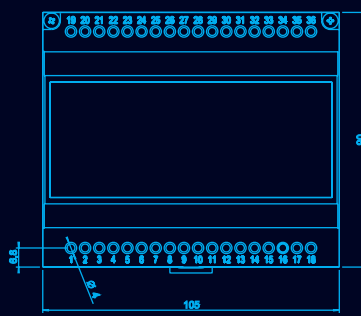

36 conexiones / connections

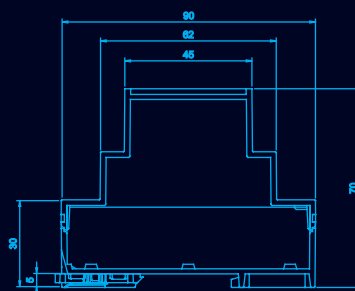

ARTÍCULOS / ARTICLES

8506101	Caja 16 conexiones Box 16 connections
8506104	Caja 16 conexiones cubierta abierta Box 16 connections open cover
8506102	Caja 24 conexiones Box 24 connections
8506105	Caja 24 conexiones cubierta abierta Box 24 connections open cover
8506103	Caja 36 conexiones Box 36 connections
8506106	Caja 36 conexiones cubierta abierta Box 36 connections open cover