

**CMC-
Top Concept**
A redefinition of
rack security

- More flexibility
- More individuality
- More compatibility
- More profitability



Security management as a success factor

Data losses and system failures in network and production equipment can involve enormous cost risks, and even threaten a company's very existence. For this reason, it is important to safeguard your company's "life blood" by ensuring stable information and production flows.

As the manufacturer of one of the world's most comprehensive packaging and climate control ranges, Rittal now unveils the latest generation of monitoring technology: Rittal CMC Top Concept. **Never before has rack security been so individual, so simple and so cost-effective.**



Access allowed?

Centralised monitoring of access authorisation
to server units is particularly security-relevant in computer centres and office organisation systems. Smart card readers, magnetic card readers or coded locks provide the required information, whilst access sensors monitor unauthorised opening of enclosure doors and panels.

Stay cool...

... with maximum performance
Constant low temperatures for electronics are a vital safety factor, both in the network and in the production process. Monitoring the internal rack temperature and controlling the climate technology to reliably dissipate heat loss are crucial factors in this respect.

**You define your requirements –
we have the solution!**

●	The CMC-TC system	2 – 9
●	CMC-TC sensor units	10/11
●	CMC-TC processing unit	12/13
●	CMC-TC master	14/15
●	CMC-TC accessories	16 – 25
●	Software/planning tools	26/27

CMC-Top Concept – The innovative rack monitoring system from Rittal

New, decentralised functional units allow you to select components according to your specific requirements. This in turn produces highly individual, cost-effective solutions. The openness of the modular principle ensures that you are ideally prepared for any future extension to your security requirements.

More compatibility

The CMC-TC is capable of communicating via virtually all standard protocols.



More flexibility

The modular layout and almost limitless extensibility allow the CMC-TC to grow along with your requirements.




More profitability

The CMC-TC facilitates integration of the decentralised function blocks into your IT system, quickly and without incurring any unnecessary costs.



More individuality

The CMC-TC can be tailored fully to your requirements, from decentralised monitoring via individual processing units, to control of the complete system by a master unit.

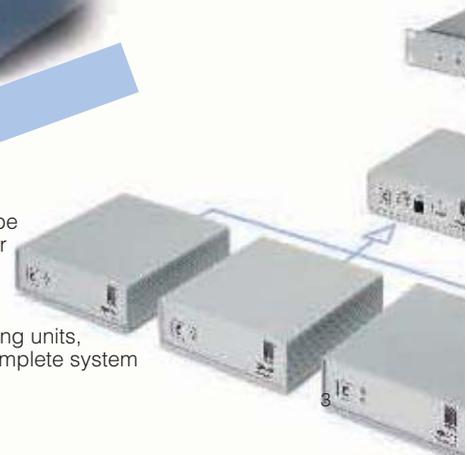

The latest concept in risk minimisation

The nerve centre for security



Access authorisation

Is registered with the CMC-TC for the entire network. In the event of an unauthorised access attempt, the system raises the alarm. Smart card readers, magnetic card readers and coded locks are combined with access sensors and electro-magnetic locks.



Heat

High temperatures and temperature fluctuations pose a major threat to modern microelectronics. By regulating the relevant climate control components, the CMC-TC ensures a constant cool temperature. Any breaches of the limits are reported.



Smoke

Smoke generation always poses a threat. The system raises the alarm.



Vandalism

Reportable events include damage-induced vibration or the unauthorised opening of the enclosure. Corresponding sensors supply the information.



Condensate

Humidity causes incorrect flows. The hygro-sensor initiates preventive action via the CMC-TC.




Signals

Danger is clearly indicated: Decentralised, optical alarm signals on the smoke alarm, the handle system or via signal lights supplement centralised reporting via the CMC-TC.

All enclosure system or room security-related factors are permanently monitored by the Rittal CMC-TC, and any potential risks are logged and indicated in good time.

Appropriate counteractive action can either be initiated automatically, or by the central remote monitoring facility.

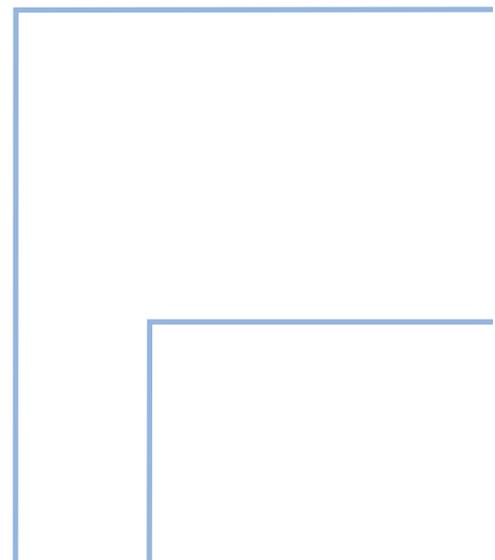

	Sensor unit	I/O unit	Access unit	Climate unit
Sensors/actuators:				
7320.500	Temperature sensor	●		●
7320.510	Humidity sensor	●		
7320.520	Analog sensor input module "4-20 mA"	●		
7320.530	Access sensor*)	●	●	●
7320.540	Vandalism sensor	●		
7320.550	Airflow monitor	●		●
7320.560	Smoke alarm	●		●
7320.570	Motion sensor	●		●
7320.580	Digital sensor input module	●	●	●
7320.590	Digital sensor relay output module	●		
7320.600	Voltage monitor	●		●
Latch/reader:				
7320.700	Electro-magnetic Ergoform-S FR/PS/TC		●	
7320.710	Electro-magnetic Ergoform-S QR		●	
7320.720	Electro-magnetic TS 8 handle		●	
7320.730	Universal latch		●	
7320.740	Relay output module for room door		●	
7320.750	Smart card reader		●	
7320.760	Magnetic card reader		●	
7320.770	Coded lock		●	

*) Up to a maximum of 5 sensors may be connected in series

With the new CMC-TC system, all monitoring functions and sensors may be freely selected.

The CMC-TC system allows monitoring applications to be configured cost-effectively and in a targeted manner. The processing unit (PU) with network interface forms the basis. The sensor units are

combined with sensors to form the PU. This determines the function. The PU may optionally be operated via the CMC-TC master for enhanced performance. The finishing touches are provided by the plug & play concept with automatic sensor detection and configuration.

The sensor units

Universal I/O unit

- The I/O unit is the alarm and measurement module.
- Alarm sensors may be connected (e.g. motion detector).
- Analog measurements can be transmitted and monitored (temperature, humidity, 4–20 mA).
- The system is capable of switching relay output modules.
- The unit has 4 universal ports for 4 sensors/actuators.
- The I/O unit must be connected to the PU. Data exchange and power supply to the electronics are provided in this way.

Access unit

- The access unit serves to control door systems.
- The doors can be opened remotely via the network.
- The doors can also be opened by authorised individuals via a coded lock, magnetic card or smart card.
- The doors of enclosures or rooms can be monitored and activated.
- The unit is designed for two separate door systems.
- The access unit must be connected to the PU. Data exchange and power supply to the electronics are provided in this way.

Climate unit


- The climate unit serves to control the fan and thus regulate the temperature.
- The physical airflow of the fan is monitored with due regard for the controller.
- If no temperature sensor or airflow sensor is used, the two universal ports can also be fitted with other sensors (see table).
- Simple fan connection via IEC jacks and connectors.
- The unit is designed for one fan system.
- The climate unit must be connected to the PU. Data exchange and power supply to the electronics are provided in this way.

Processing unit (PU)

- The processing unit (PU) forms the basis of the monitoring system.
- The system can be incorporated directly into the user network via the network interface 10BaseT, TCP/IP, SNMP.
- The system has an integral Web server to enable configuration of the system.
- The system can optionally be linked to the CMC-TC master via the network interface.
- The monitoring functions are determined by the sensor units or sensors/actuators connected to the PU, and may therefore be flexibly selected.
- Up to 4 sensor units may be connected in any given combination (I/O, access, climate).


Master unit

- The CMC-TC master is required in all situations where large numbers of security-relevant factors must be monitored or where exacting demands are placed on the technology.
- The CMC-TC master offers high performance and helps to conserve IP resources.
- The PU with the sensor units is always required for monitoring.
- Up to 10 processing units (PU) may be connected as a slave.
- The master offers a 10/100BaseT interface to the user network and summarises all monitoring variables on HTTP and SNMP.
- The system can be connected and operated directly via the Rittal SSC.

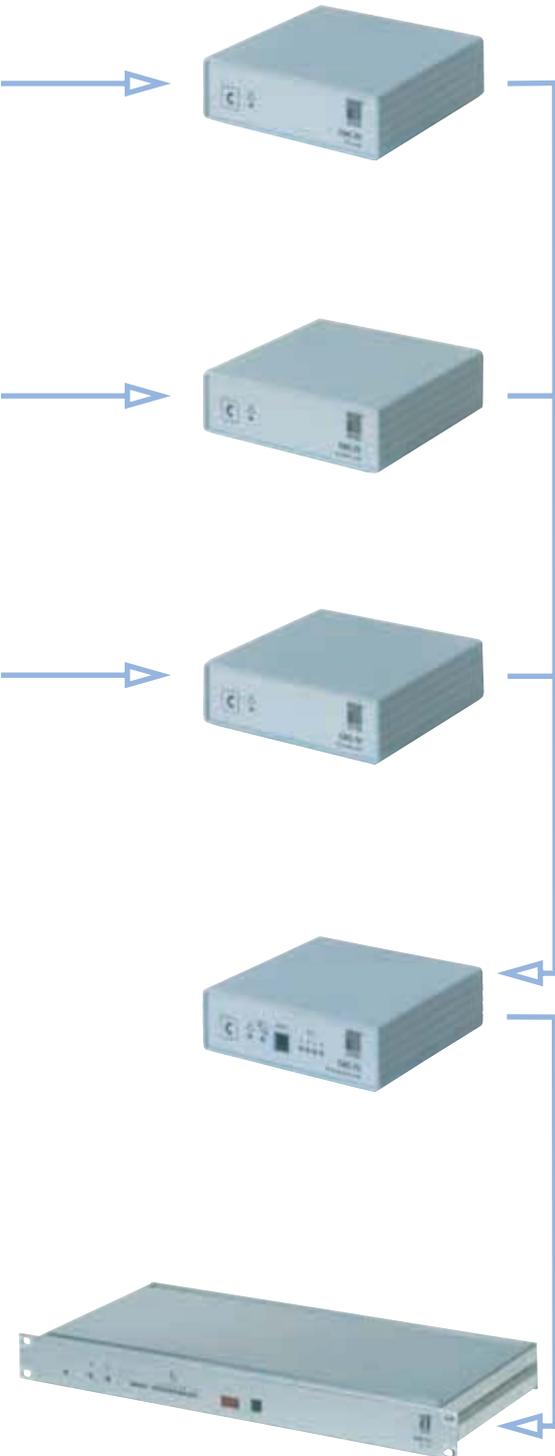

Open to all requirements

Your requirements define the solution

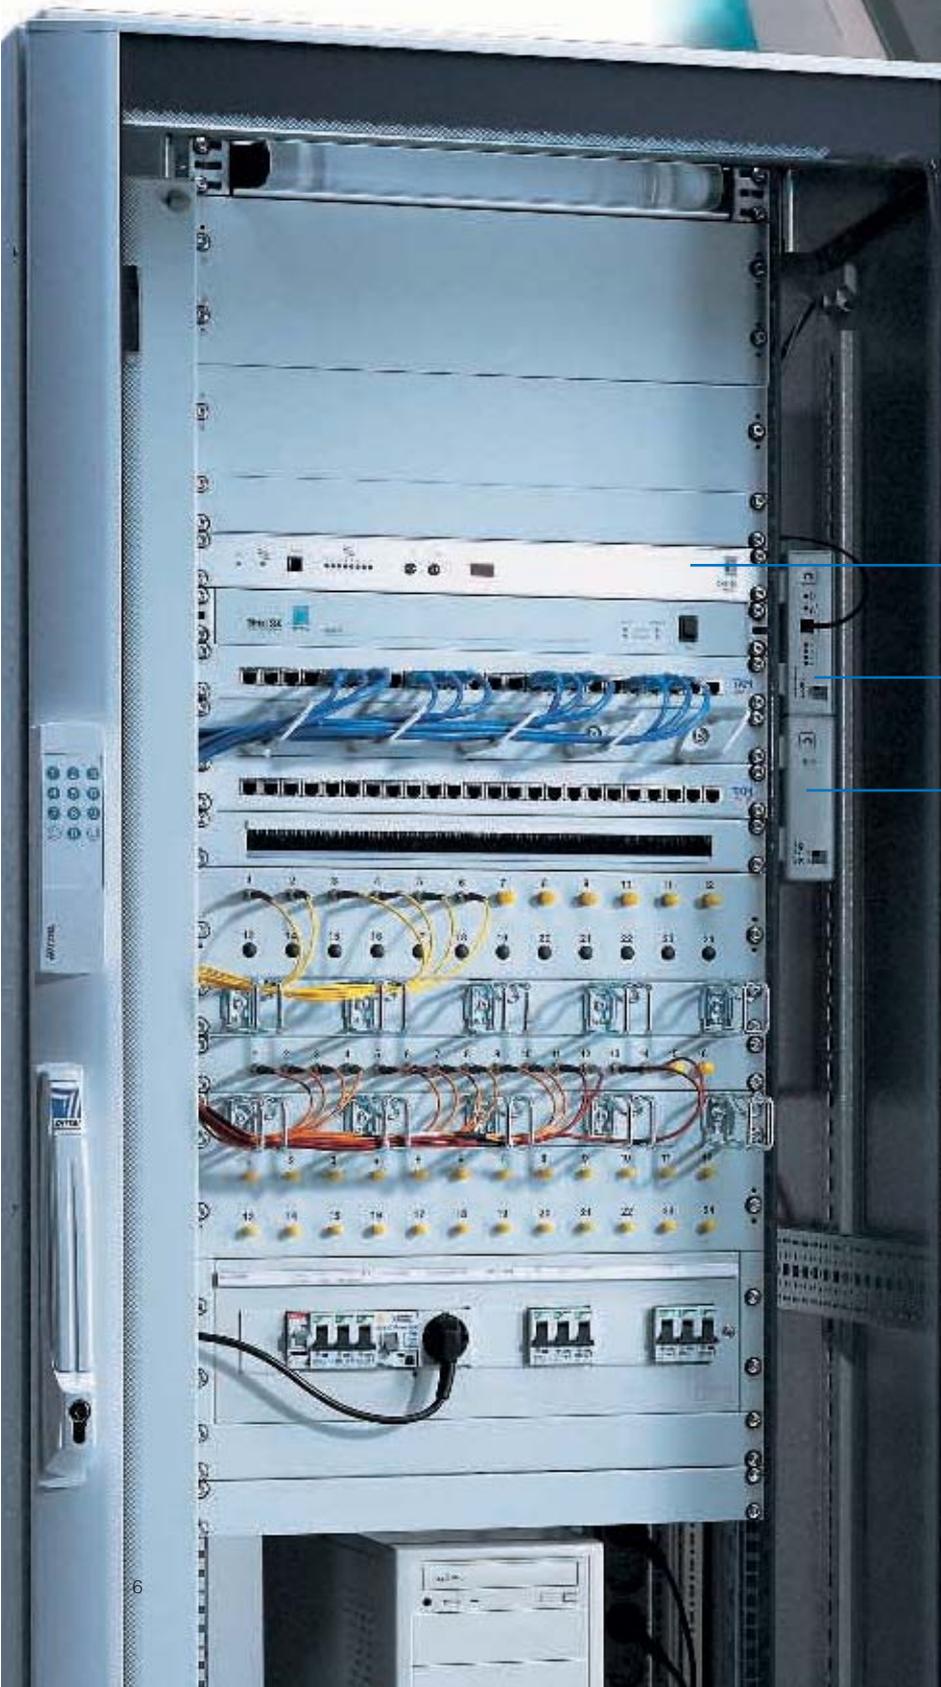

Master unit

The CMC-TC master offers high performance. Up to 10 processing units (PU) may be connected.

Processing unit

The processing unit (PU) forms the basis of the monitoring system. The compact enclosure can be attached to the enclosure frame in a space-saving configuration.

Sensor units

Access unit

The access unit is used to control and monitor door systems.

I/O unit

The I/O unit is the alarm and measurement module. Relay output modules may also be switched.

Climate unit

The climate unit is for fan control and for monitoring the fans.

The smallest security unit is comprised of your choice of sensors, a sensor unit, and a processing unit with the corresponding power pack.

Up to four sensor units may be monitored with one processing unit. The processing units are network-compatible and can be integrated into a network management system via SNMP.

Up to 10 processing units may be connected to one master unit. This offers almost limitless extensibility of the modular system.


The maximum number of sensors which may be used with this cascade system is shown in the table below. Of course, any given combination of individual sensor units is possible.

**CMC-TC configurator –
The system planning tool,
see page 26.**

The basic system

The processing unit (PU) forms the basis of any CMC-TC application. The network interface (10BaseT, TCP/IP, SNMP) allows it to be linked directly into the user network or to the CMC-TC master. The following products are required for each CMC-TC application:

- Processing unit (7320.100)
- Power pack 100 – 240 V 50 – 60 Hz (7320.425) or power pack 48 V DC (7320.435)
- Connection cable for power pack, country-specific (7200.210 – .214)
- Connection cable for sensor unit (7320.470/.472/.481)
- At least one sensor unit (7320.210/.220/.230)
- Programming cable (7200.221)

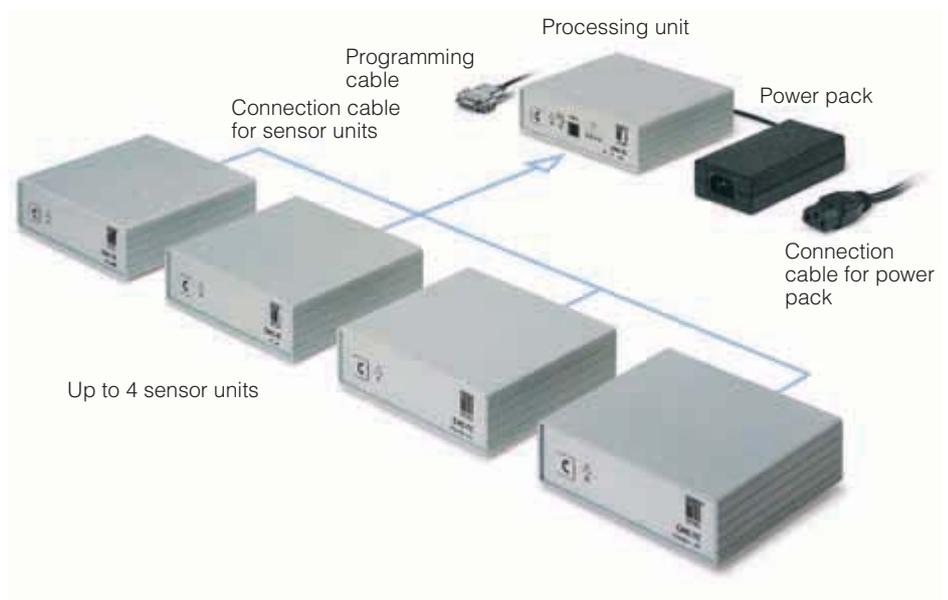

Connection table (max.)		One sensor unit			One processing unit			One master unit		
	No. of masters	-	-	-	-	-	-	1	1	1
	No. of processing units	1	1	1	1	1	1	10	10	10
	Sensor unit	I/O unit	Access unit	Climate unit	I/O unit	Access unit	Climate unit	I/O unit	Access unit	Climate unit
	No. of sensor units	1	1	1	4	4	4	40	40	40
Sensors/actuators:		max.	max.	max.	max.	max.	max.	max.	max.	max.
7320.500	Temperature sensor	4	0	2	16	0	8	160	0	80
7320.510	Humidity sensor	4	0	0	16	0	0	160	0	0
7320.520	Analog sensor input module "4 – 20 mA"	4	0	0	16	0	0	160	0	0
7320.530	Access sensor*)	4+4 serial	2+2 serial	2+2 serial	16+16 serial	8+8 serial	8+8 serial	160+160 serial	80+80 serial	80+80 serial
7320.540	Vandalism sensor	4	0	0	16	0	0	160	0	0
7320.550	Airflow monitor	4	0	2	16	0	8	160	0	80
7320.560	Smoke alarm	4	0	2	16	0	8	160	0	80
7320.570	Motion sensor	4	0	2	16	0	8	160	0	80
7320.580	Digital sensor input module	4	2	2	16	8	8	160	80	80
7320.590	Digital sensor relay output module	4	0	0	16	0	0	160	0	0
7320.600	Voltage monitor	4	0	2	16	0	8	160	0	80
Latch/reader:		max.	max.	max.	max.	max.	max.	max.	max.	max.
7320.700	Elec.-magn. Ergoform-S FR/PS/TC	0	2	0	0	8	0	0	80	0
7320.710	Elec.-magn. Ergoform-S QR	0	2	0	0	8	0	0	80	0
7320.720	Elec.-magn. TS 8 handle	0	2	0	0	8	0	0	80	0
7320.730	Universal latch	0	2	0	0	8	0	0	80	0
7320.740	Relay output module	0	2	0	0	8	0	0	80	0
7320.750	Smart card reader	0	2	0	0	8	0	0	80	0
7320.760	Magnetic card reader	0	2	0	0	8	0	0	80	0
7320.770	Coded lock	0	2	0	0	8	0	0	80	0

*) Up to a maximum of 5 sensors may be connected in series.


The CMC-Top Concept system

The CMC-TC offers a new dimension in flexibility, efficiency, technology and cost-effectiveness. The modular master/slave system uses network technology as its communication system. In the past, bus systems were used for this purpose, but the CMC-TC system uses TCP/IP and SNMP for communication between master and slave.

This allows users to choose between high-performance operation with the CMC-TC master, or merely working with the processing unit. The standardised interface on the processing unit (PU) allows small individual applications to be achieved cost-effectively.


Decentralised individual applications

If only a few monitoring functions are desired, monitoring information can be fed into the network at several network nodes via the processing unit and one sensor unit.

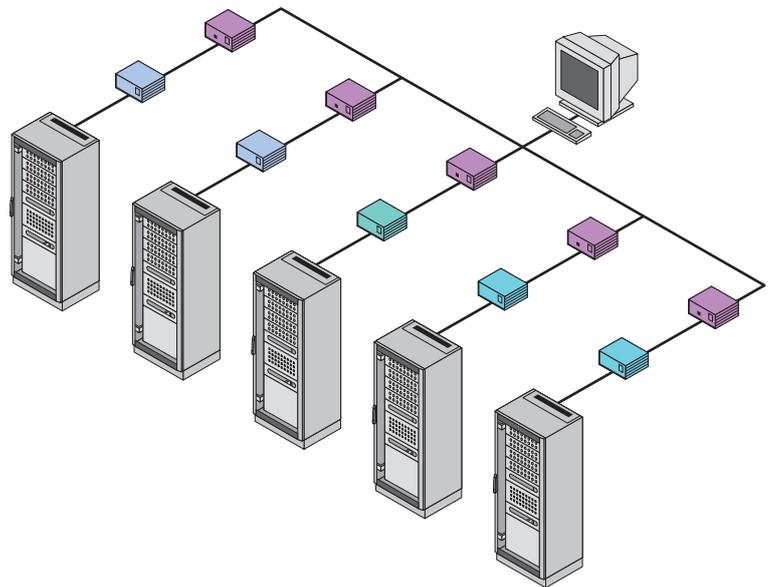


Decentralised system applications

The functions of the processing unit (PU) are determined and extended by the sensor unit. This makes it easy to monitor entire enclosure systems with just one PU. The modular system offers the necessary degree of flexibility.

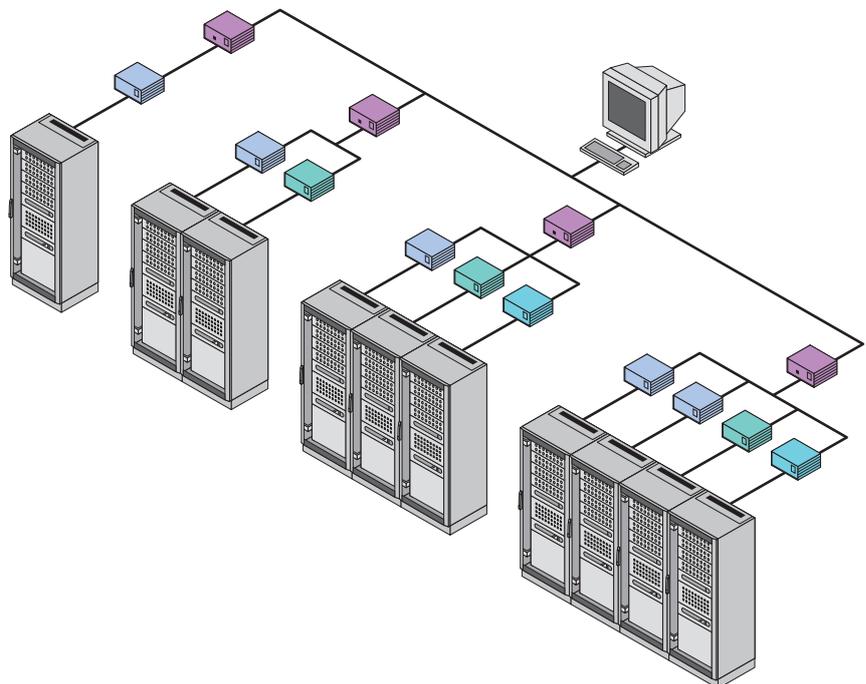


- Master unit
- Processing unit
- I/O unit
- Access unit
- Climate unit

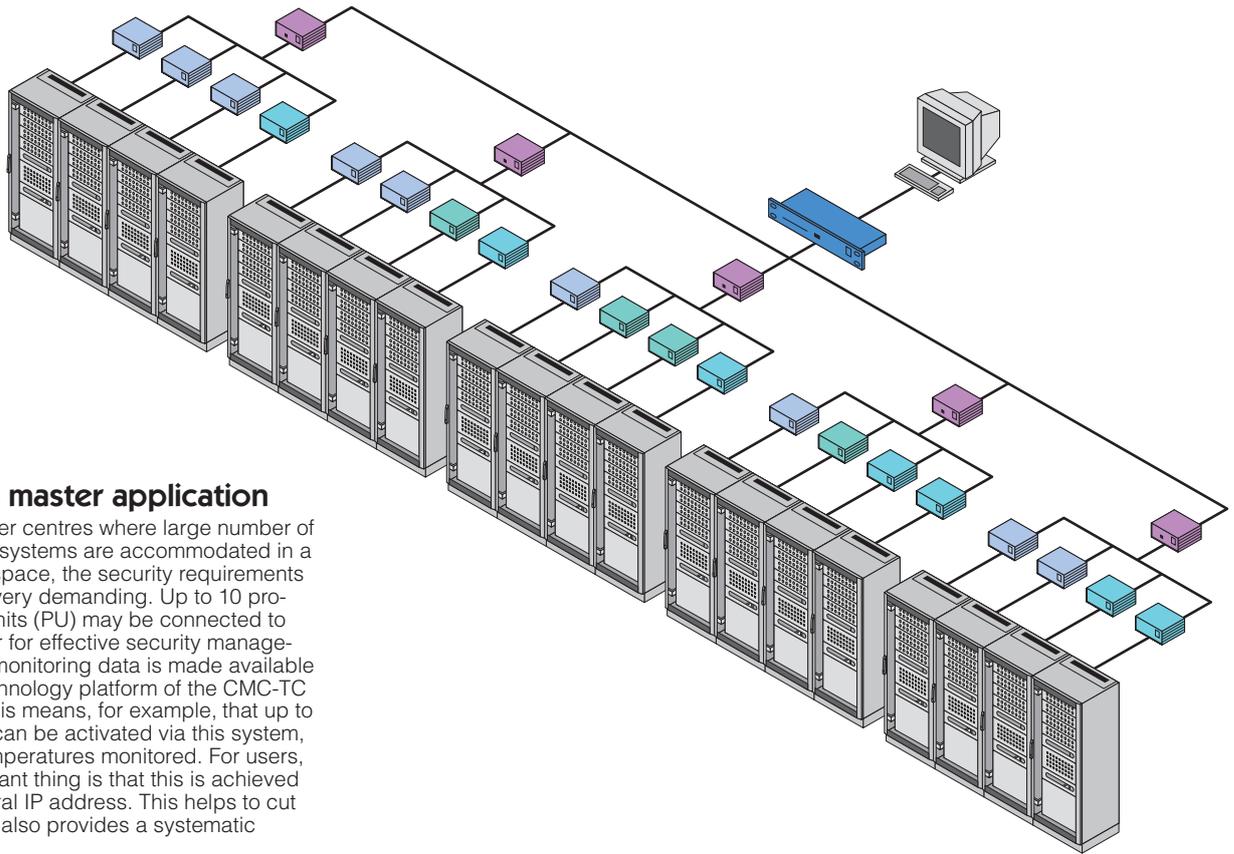

Central master application

In computer centres where large number of computer systems are accommodated in a confined space, the security requirements are often very demanding. Up to 10 processing units (PU) may be connected to the master for effective security management. All monitoring data is made available on the technology platform of the CMC-TC master. This means, for example, that up to 80 doors can be activated via this system, or 160 temperatures monitored. For users, the important thing is that this is achieved via a central IP address. This helps to cut costs and also provides a systematic overview.

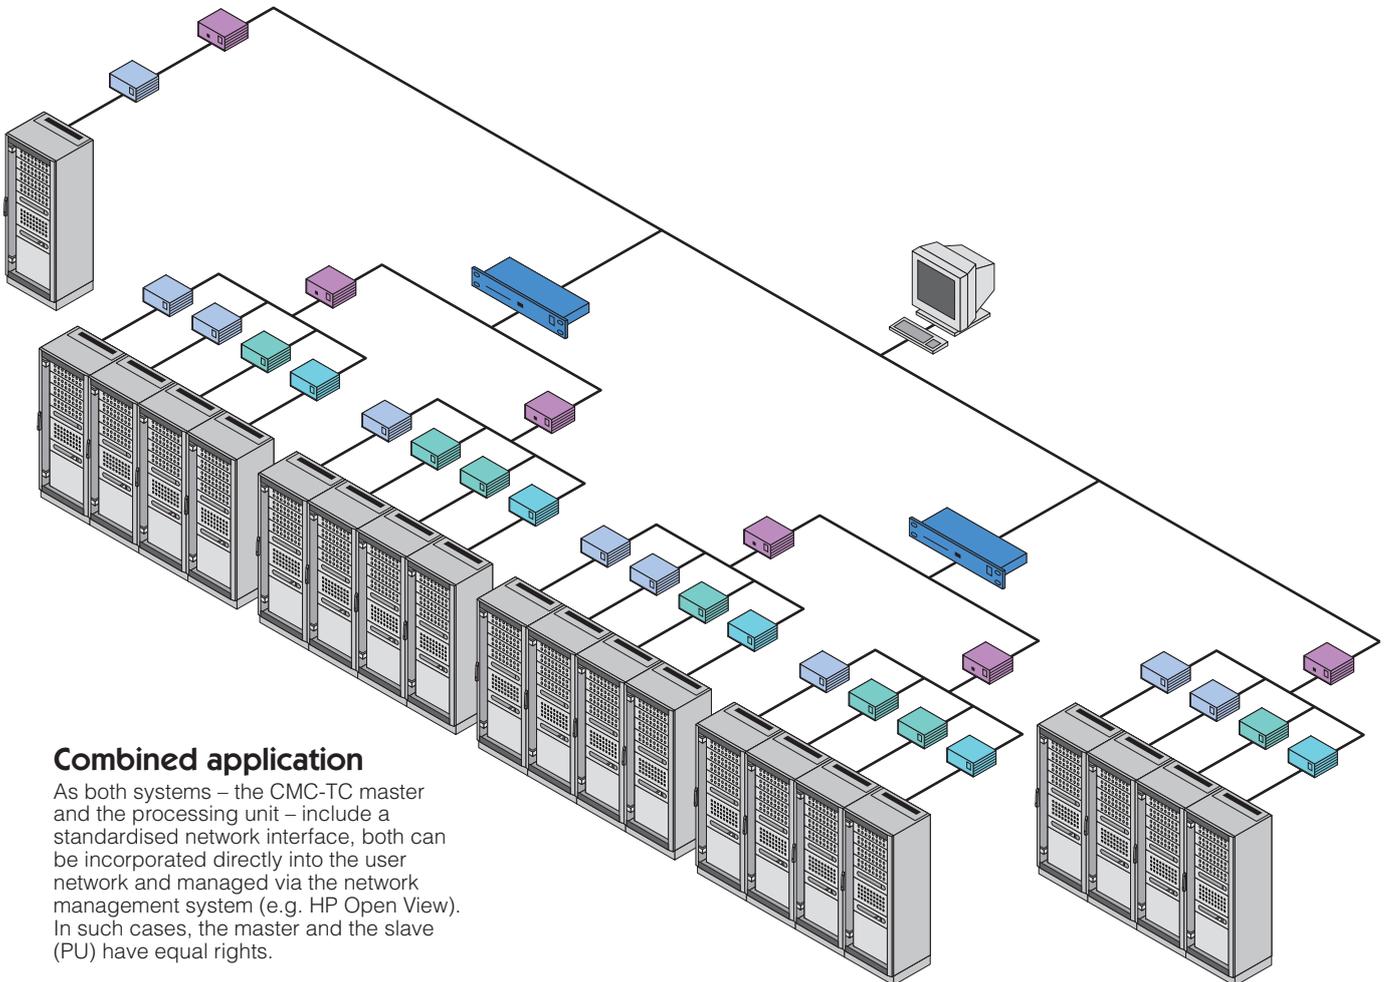

Combined application

As both systems – the CMC-TC master and the processing unit – include a standardised network interface, both can be incorporated directly into the user network and managed via the network management system (e.g. HP Open View). In such cases, the master and the slave (PU) have equal rights.

There is a choice of 3 sensor units:

I/O unit:

the alarm and measurement module

Access unit:

for controlling door systems

Climate unit:

for fan control and monitoring

Benefits:

- Function selection via 3 sensor units
- Open to customer-specific sensors/actuators
- Automatic sensor detection
- Simple installation based on the plug & play system
- No additional power pack required
- Choice of mounting on the enclosure frame or 482.6 mm (19") system
- I/O unit: freely selectable sensors/actuators
- Access unit: personalised access detection
- Climate unit: fan control with airflow monitoring

Technical description:

The sensors/actuators are set up via an automatic electronic identity system. Because it is installed using a flexible plug & play system, there is no need for time-consuming programming and wiring. Power is supplied centrally via the connection cable to the PU.

Technical specifications:

W x H x D: 136 mm x 44 mm (1 U) x 129 mm
 Temperature application range: +5° C to +45° C
 Humidity application range: 5% to 95% relative humidity, non-condensing
 IP protection category: IP40 to EN 60 529



Interface for linking the sensor unit and processing unit. Used for data transmission and power supply. Cable 7320.470/.472/.481.



Just one click of the button, and the system reconfigures itself automatically.




Up to 3 systems may be integrated into the 1 U mounting unit: Model No. 7320.440.

CMC-TC sensor unit I/O unit



With this sensor unit, alarm messages, status messages and measurements can be forwarded and remote actions can be executed via relay output modules. The I/O unit has 4 universal inputs/outputs. The sensors/actuators listed below can be operated here. The interface to the user network is via the PU (processing unit), which is always required to operate the system.

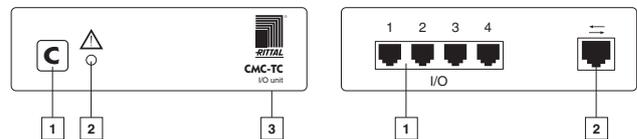

- ① Control key for detection/set-up of the sensors/actuators
- ② Alarm LED signals alarms or configuration changes
- ③ Mounting fixture for 7320.440 or 7320.450

- ① Four RJ 12 inputs for sensors/actuators (see bottom list)
- ② RJ 45, connection to PU 7320.100 via connection cable 7320.470/.472/.481 (The unit is also supplied with power via this connection.)

Sensor unit I/O unit	Model No. DK
4 universal inputs or outputs	7320.210

! Also required:


Sensors/actuators	max.	Model No.	Page
Temperature sensor	4	7320.500	19
Humidity sensor	4	7320.510	19
Analog sensor input module "4 – 20 mA"	4	7320.520	22
Access sensor	4 + 4 serial	7320.530	21
Vandalism sensor	4	7320.540	21
Airflow monitor	4	7320.550	19
Smoke alarm	4	7320.560	19
Motion sensor	4	7320.570	21
Digital sensor input module	4	7320.580	22
Digital sensor relay output module	4	7320.590	22
Voltage monitor	4	7320.600	20
Connection cable	1	7320.470	18

CMC-TC sensor unit access unit



This sensor unit allows the remote release of one or two door systems for access via the network, as well as the initiation of personalised opening via a read system (smart card reader). The system also monitors the status of the door, handle or latch. Authorised access codes can be set up via http. The sensors/actuators/readers listed below can be operated here.

In order to operate the unit, at least one access sensor and at least one latch (e.g. handle) per door system must always be used. See page 21, 24.

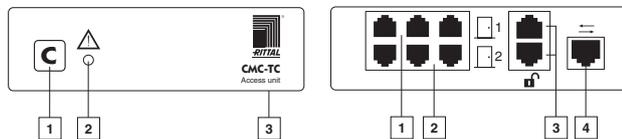

- ① Control key for detection/set-up of the sensors/actuators
- ② Alarm LED signals alarms or configuration changes
- ③ Mounting fixture for 7320.440 or 7320.450

- ① Inputs for access sensor, latch system 1 (see bottom list)
- ② Inputs for access sensor, latch system 2 (see bottom list)
- ③ I²C bus for reader units, door system 1 and 2 (see bottom list)
- ④ RJ 45 connection to PU 7320.100 via connection cable 7320.470 /.472 /.481 (The unit is also supplied with power via this connection.)

Sensor unit access unit	Model No. DK
Control of 2 door systems	7320.220

! Also required:


Sensors/actuators	max.	Model No.	Page
Access sensor	2 + 2 serial	7320.530	21
Digital input module for door release	2	7320.580	22
Latch/reader			
Electro-magnetic Ergoform-S FR/PS/TC	2	7320.700	24
Electro-magnetic Ergoform-S QR	2	7320.710	24
Electro-magnetic TS 8 handle	2	7320.720	24
Universal latch	2	7320.730	24
Relay output module for room door	2	7320.740	23
Smart card reader for door release	2	7320.750	25
Magnetic card reader for door release	2	7320.760	25
Coded lock for door release	2	7320.770	25
Connection cable	1	7320.470	18

CMC-TC sensor unit climate unit



A temperature control circuit is installed with this sensor unit. Temperature setpoints are set via the PU, and these are then compared with the actual temperature. Depending on the evaluation, the fan system is activated. The function of the fans can also be monitored with an airflow sensor. Monitoring is only active with the fan operational. Other sensors may optionally be connected to the unit.

In order to operate the unit as a temperature fan control circuit, at least one temperature sensor must always be used. See page 19.

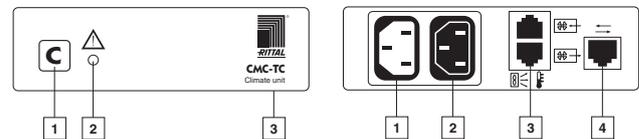


- ① Control key for detection/set-up of the sensors
- ② Alarm LED signals alarms or configuration changes
- ③ Mounting fixture for 7320.440 or 7320.450

- ① Input for fan supply 115/230 V AC, cable 7200.210 – .214
- ② Output to fan with cable 7200.215
- ③ Two RJ 12 inputs for sensors (see bottom list)
- ④ RJ 45 connection to PU 7320.100 via connection cable 7320.470 /.472 /.481 (The unit is also supplied with power via this connection.)


Sensor unit climate unit	Model No. DK
Control of a fan system	7320.230

! Also required:

Sensors	max.	Model No.	Page
Temperature sensor	2	7320.500	19
Access sensor	2 + 2 serial	7320.530	21
Airflow monitor	2	7320.550	19
Smoke alarm	2	7320.560	19
Motion sensor	2	7320.570	21
Digital input module	2	7320.580	22
Voltage monitor	2	7320.600	20
Connection cable	1	7320.470	18

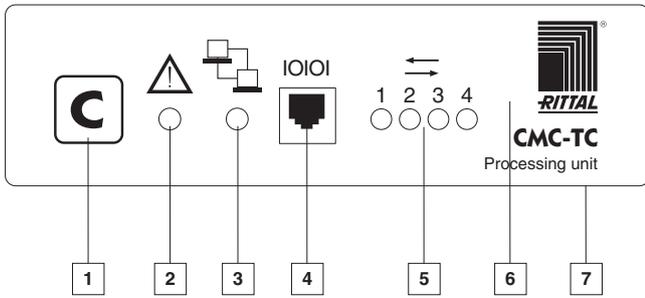

- 1 Control key**
The C-key is used for sensor/actuator detection, set-up of the system and acknowledgement.
- 2 Alarm LED**
This LED signals alarms or configuration changes.
- 3 Link/Traffic LED**
This LED signals the status of the network interface 10BaseT.
- 4 RS 232 interface RJ 11**
For programming via the serial PC interface.
- 5 LEDs channels of the sensor units**
These LEDs indicate the status of the attached sensor units.
- 6 Acoustic alarm**
There is an acoustic alarm signalling device integrated into the PU.
- 7 Mounting fixture**
For attachment with nylon loop fastener, individual bracket 7320.450 or 1 U mounting unit 7320.440.

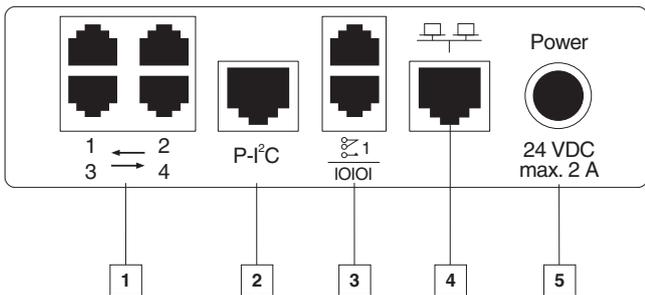

- 1 Inputs for sensor unit RJ 45**
Up to 4 sensor units may be connected to the PU via the 4 inputs. The sensor units determine the function of the PU. There is a choice of 3 sensor units. Connection cable 7230.470 /.472 /.481.
- 2 Power I²C bus RJ 45**
Up to 2 voltage extension units 7200.520 may be connected via the power I²C bus. Up to 3 AC voltages can be monitored with every extension unit. Connection cable 7230.470 /.472 /.481.
- 3 Alarm relay RJ 12/RS 232 RJ 12**
The upper RJ 12 jack provides a changeover contact from the PU alarm relay. Connection cable 7200.430. The lower RJ 12 jack provides an open serial interface.
- 4 Ethernet 10BaseT RJ 45**
Integral Ethernet interface to IEEE 802.3 via 10BaseT half-duplex 10 Mbit/s.
- 5 Power supply**
The rated voltage for the PU is 24 V DC. There is a choice of various power packs with varying primary voltages. AC power pack 7320.425.

CMC-TC processing unit (PU)

The processing unit forms the basis of the CMC-TC system. This unit is required for every monitoring application.

Interface to the customer:

The PU can be incorporated directly into the user network via 10BaseT. The PU can also be linked to the master 7230.000 via this interface (TCP/IP, SNMP).

Interface to the sensors/actuators:

The PU provides 4 open ports for sensor units. The sensor units determine the

function of the PU. There is a choice of 3 different sensor units (I/O, access, climate) with varying functions. In this way, the monitoring functions can be freely combined.

Fast, easy programming and installation:

The sensors/actuators are set up via an automatic electronic identity system. Installation is via a flexible plug & play system. This eliminates the need for time-consuming programming and wiring.

Power supply:

Power is supplied centrally via a power pack in the PU. The attached sensor units and all connected sensors are supplied with power in this way. There is a choice of two input voltages (AC power pack 7320.425 and DC power pack 7320.435).

Technical specifications

W x H x D mm	136 x 44 (1 U) x 129
Rated voltage	24 V DC
Network interface	Ethernet to IEEE 802.3 via 10BaseT half-duplex 10 Mbit/s
Protocols	TCP/IP, SNMP V1.0, TELNET, FTP, HTTP
Serial interfaces	RS 232
Ports for sensor units	4 jacks RJ 45, shielded
Bus system	Power I ² C for extension unit voltage AC
Relay output	Change-over contact max. 24 V DC 1 A
Acoustic display	Piezo signal generator
Time function	Real-time clock
Temperature application range	+ 5 °C to + 45 °C
Humidity application range	5% to 95% relative humidity, non-condensing
IP protection category	IP 40 to EN 60 529

Ethernet TCP/IP SNMP monitoring system	Model No. DK
CMC-TC processing unit (PU)	7320.100




Also required:

Selection aid, see page 7, 16.



Benefits

- Freely selectable monitoring functions
- Extendible sensor/actuator ports
- TCP/IP SNMP network connection
- Integral Web server for configuration
- Automatic menu generation
- Simple installation based on the plug & play system
- Alarm continues to record even in the event of a network failure
- Built-in real-time clock
- May be used via power pack for 115/230 V AC or 48 V DC
- Option of mounting on the enclosure frame or 482.6 mm (19") system
- The protocol for the master/slave system is TCP/IP SNMP
- May be used for large computer centres or small individual applications

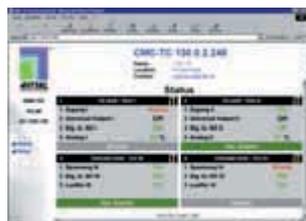

The Web server integrated into the PU

shows the states of the 4 sensor units with the connected sensors.




The Web server integrated into the PU

automatically generates the graphical interface for configuring the sensors/actuators. Links can also be set between the inputs and outputs.




The Web server integrated into the PU

stores alarm messages independently from the network. These can also be retrieved retrospectively via FTP or HTTP.

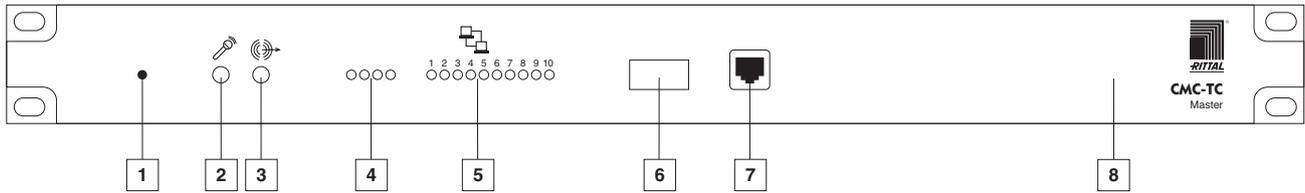

- 1 Key**
Offset system reset key with contact hazard protection.
- 2 Input for microphone**
3.5 mm jack.
- 3 Output for speaker**
3.5 mm jack.
- 4 Status LEDs**
LED 1 alarm – Alarm system message.
LED 2 changeover 10/100 Mbit/s network interface to user network.
LED 3 link/activity network interface to user network.
- 5 LEDs**
for the 10 network inputs of the processing units 7320.100.
- 6 IrDA**
Infrared interface.
- 7 RJ 11**
RS 232 interface for CMC-TC menu program.
- 8 Acoustic alarm**
There is an acoustic alarm signalling device integrated into the master.

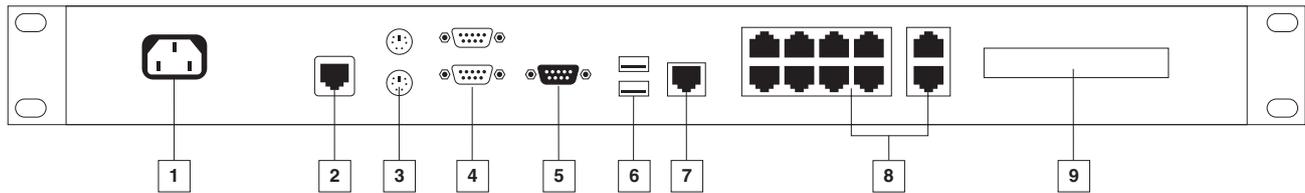

- 1 Power supply**
The IEC jack supplies the system with power.
Connection cables 7200.210 to 214.
- 2 Alarm relay**
RJ 12 socket with changeover contact.
- 3 Keyboard/mouse**
PS2 jacks for keyboard and mouse.
- 4 RS 232**
Two serial D-SUB 9 interfaces.
- 5 VGA interface HD15**
Connection for monitor or Rittal SSC.
- 6 USB interfaces**
Standard 1.1, for applications with Rittal camera.
- 7 Ethernet 10/100BaseT**
RJ 45 socket network interface to user network
Ethernet 10BaseT/100BaseT, IEEE 802.3 (10/100 Mbit/s), TCP/IP.
- 8 Ethernet 10BaseT, internal**
Ten RJ 45 jacks, network inputs for the processing units 7320.100
Ethernet 10BaseT, IEEE 802.3 (10 Mbit/s), TCP/IP.
- 9 PCMCIA**
Two PCMCIA ports for applications with a Rittal modem.

CMC-TC master

The master system may be connected between the processing unit and the user network. There are ten 10BaseT network inputs available for the processing units (PU). The PUs transmit all monitoring-related data and messages to the master system via TCP/IP, SNMP. The master has a 10BaseT/100BaseT network interface for

the user network. All monitoring data is provided in a separate MIB via TCP/IP, SNMP. The system may optionally be configured either remotely, via the integral Web server, or directly, via a local console. Basic settings can also be implemented serially via RS 232 or Telnet. A Telnet routing function to the individual processing units is also pre-integrated. This provides the user with a clear central monitoring facility.

It is possible to access up to 160 temperatures via one IP address, for example, or to monitor and activate 80 enclosure doors. Combined applications are likewise supported, and can be compiled individually from processing units and sensor units. Further functional scope for the CMC-TC master is available on request in the form of a software update.

Technical specifications

H x D	1 U x 200 mm
Rated voltage	100 – 240 V AC 50/60 Hz
Network interface	Ethernet to IEEE 802.3 via 10BaseT/100BaseT, 10/100 Mbit/s
Protocols	TCP/IP, SNMP V1.0, TELNET with SSH, FTP, HTTP
Ports for processing unit	10 jacks RJ 45, shielded, 10BaseT, TCP/IP, SNMP
Serial interfaces	RJ 11 jack RS 232 menu program, 2 D-SUB 9 jacks RS 232
USB	Standard 1.1 for Rittal Web cameras
Infrared interface	IrDA 1.0 (SIR) on the front
PCMCIA	2 x type I/II or 1x type III for applications with Rittal modem
Relay output	Change-over contact, max. load capacity 24 V DC, 1 A
Time function	Real-time clock
Temperature application range	+ 5 °C to + 40 °C

Monitoring system, master	Model No. DK
CMC-TC master	7320.000

! Also required:

Selection aid, see page 16.



Benefits


- Centralised administration
- Network connection 10/100BaseT
- Central Web server for configuration
- Local administration via PS2/VGA console
- Logging function for alarm messages
- Link for USB camera
- Free function selection for monitoring
- Ideal for large computer centres



Access to the master system via the integral Web server or local console is password-dependent.



The graphical Web menu interface allows user-friendly monitoring of the system status. Settings may also be implemented here. The menu adapts automatically to the monitoring functions currently in operation.

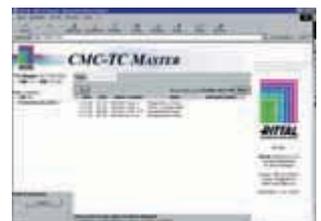

All alarms and status messages are recorded independently of the user network connection.

Accessories/Connection tables

Required accessories		24 V DC power pack	IEC connection cable	Programming cable	Connection cable, sensor unit	Mounting unit	Interference suppression capacitor
Model No. DK		7320.425 7320.435	7200.210 7200.211 7200.213 7200.214 7200.215	7200.221	7320.470 7320.472 7320.481	7320.440 7320.450	7200.490
Item selection		Page 17	Page 17	Page 17	Page 18	Page 17/18	Page 23
7320.000	Master		●	●			
7320.100	Processing unit	●	●	●		○	
7320.210	I/O unit				●	○	
7320.220	Access unit				●	○	
7320.230	Climate unit		●		●	○	○
7320.600	Voltage monitor with IEC jack		●				
7320.700	Electromagnetic Ergoform-S handle for FR, QR, PS, TC with automatic detection						
7320.730	Universal latch w. auto. detection						
7320.750	Smart card reader						
7320.760	Magnetic card reader						
7320.770	Coded lock						
7200.630	CMC socket strip						
7200.520	Voltage expansion unit		●		●		
2372.000	CMC alarm signal lamp						

Required accessories		Adaptor for reader units	Connection cable RJ 11/12	Extension cable RJ 11/12	Locking bar PS/FR	Attachment for universal latch	Digital sensor input model
Model No. DK		7200.344 7200.345 7200.346 7200.347	7200.420 7200.430	7200.440 7200.450	7200.371 7200.372	7200.61X	7320.580
Item selection		Page 25	Page 18	Page 18	Page 24	Page 24	Page 22
7320.000	Master						
7320.100	Processing unit						
7320.210	I/O unit			RJ 12 ○ *)			
7320.220	Access unit			RJ 12 ○ *)			
7320.230	Climate unit			RJ 12 ○ *)			
7320.600	Voltage monitor with IEC jack						
7320.700	Electromagnetic Ergoform-S handle for FR, QR, PS, TC with automatic detection				●		
7320.730	Universal latch w. auto. detection					○	
7320.750	Smart card reader	●					
7320.760	Magnetic card reader	●					
7320.770	Coded lock	●					
7200.630	CMC socket strip		RJ 11 ●	RJ 11 ○			●
7200.520	Voltage expansion unit						
2372.000	CMC alarm signal lamp		RJ 12 ●	RJ 12 ○			

○ = Optional accessories

● = Required accessories

*) = In conjunction with CMC-TC accessories (sensors/actuators/handles/readers) type RJ12



Connection cable/extension

The cable is used for connecting to:

- CMC-TC master
- 24 V power pack for PU
- Climate unit (connected fan)
- Voltage monitor
- Voltage expansion unit

Technical specifications:

PVC cable, 3 pole, with IEC cable coupling (non-heating appliances) with contact protection CEE22.

Supply includes:

1 connection cable, length 2.5 m.

Country version	Voltage (V)	Model No. DK
D	230	7200.210
GB	230	7200.211
F/B	230	7200.210
CH	230	7200.213
USA / CDN	230/115	7200.214
Extension for non-heating appliances	230/115	7200.215



24 V DC power pack for PU

A 24 V DC power pack is required to supply the processing unit with power. There are two variants available:

- The 100 – 240 V AC power pack requires an IEC connection cable to supply the voltage.
- An alternative power pack is designed for the telecommunications sector (48 V battery voltages) and is connected at the input end via a terminal block.

Both power packs contain an output cable, 1.65 m long.

Primary input voltage	Output voltage	Model No. DK
100 – 240 V AC/ 50/60 Hz	24 V DC	7320.425
48 V DC	24 V DC	7320.435



Also required:

IEC connection cable for DK 7320.425 power pack – see above.



Programming cable

The interface cable is used to configure the network parameters in the processing unit and the master unit.

The RJ 11 connector is connected to the front jack of the PU/master, whilst the 9-pole SUB-D connector is connected to a serial PC interface.

Packs of	Model No. DK
1	7200.221



Mounting unit 1 U

The mounting unit can accommodate up to 3 sensor units or processing units in the 482.6 mm (19") attachment level.

Material:

Sheet steel, spray finished


Colour:

RAL 7035

Packs of	Model No. DK
1	7320.440



Cables/mounting accessories

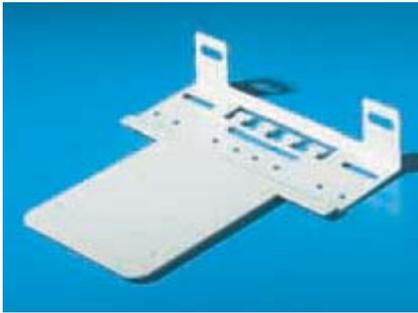

Mounting module

The mounting module accommodates individual sensor units or processing units, for mounting on the frame section.

Material:

Sheet steel, spray finished

Colour:

RAL 7035

Packs of	Model No. DK
1	7320.450



Connection cable RJ 45

This cable is responsible for data exchange and power supply to a sensor unit via the processing unit. There is an RJ 45 connector at each end of the shielded cable.

Length	Packs of	Model No. DK
0.5 m	4	7320.470
2.0 m	4	7320.472
10.0 m	1	7320.481



Connection cable RJ 11, RJ 12

The RJ 12 connection cable allows the alarm relay output of the processing unit to be used for individual alarm lights/indicators. The RJ 11 connection cable facilitates connection to the CMC socket strip in conjunction with the digital input module. The cable is equipped with an RJ 11/12 connector at one end. The other end is open. Length 5 m.


Connector	Packs of	Model No. DK
RJ 11	4	7200.420
RJ 12	4	7200.430




Extension cable RJ 11, RJ 12

The cable is used to extend the sensor supply cables (RJ 12) and individual actuator cables. The cable is equipped with an RJ 11/12 connector at one end. There is an RJ 11/12 jack at the other end. Length 5 m.

Connector/jack	Packs of	Model No. DK
RJ 11	4	7200.440
RJ 12	4	7200.450



Front view (example: RJ 12)





Temperature sensor

The sensor assumes the function of a temperature monitor and contains an identifier so that it is automatically detected and set up by the CMC-TC system. It is connected to a sensor unit via the connection cable (supplied loose). If required, extension cable RJ 12 may be used. The sensor is also capable of controlling a fan on the climate unit.

Packs of	Model No. DK
1	7320.500

Technical specifications:

Type: NTC
Resistance: 10 kOhm at 25 °C
Tolerance: ± 2 °C
Connection: RJ 12 jack, 6-pole
Connection cable: Length 2 m, RJ 12 connector 6/6 at both ends
Temperature application range: + 5 °C to + 45 °C

To fit sensor unit:

I/O unit	Access unit	Climate unit
●		●



Smoke alarm

The smoke alarm is based on an opto-electronic smoke particle evaluation within a measurement chamber. The alarm contains an identifier so that it is automatically detected and set up by the CMC-TC system. Power supply and alarm relay to the sensor unit is via the connection cable (supplied loose). If required, extension cable RJ 12 may be used.

Packs of	Model No. DK
1	7320.500

Technical specifications:

Alarm type: Combustion product alarm (smoke)
Sensor/transmitter: Silicone PIN photodiode/GaAs infrared LED
Measurement frequency: Once every ten seconds
Current rating: max. 61 mA
Connection: RJ 12 jack, 6-pole
Connection cable: Length 2 m, RJ 12 connector 6/6 at both ends
Dimensions (alarm with base/plinth): D = 100 mm, H = 50 mm

To fit sensor unit:

I/O unit	Access unit	Climate unit
●		●



Humidity sensor

The sensor measures relative air humidity and converts it into a frequency signal. It contains an identifier so that it is automatically detected and set up by the CMC-TC system. Power supply and data evaluation is via the I/O sensor unit using the connection cable (supplied loose). If required, extension cable RJ 12 may be used.

Packs of	Model No. DK
1	7320.510

Technical specifications:

Sensor: With humidity/frequency converter (50 kHz at 76 % relative humidity)
Sensor measurement range: Relative humidity 10...90 % rel. hum. ± 3% (at 20°C)
Connection: RJ 12 jack, 6-pole
Connection cable: Length 2 m, RJ 12 connector 6/6 at both ends
Temperature application range: + 5 °C to + 45 °C

To fit sensor unit:

I/O unit	Access unit	Climate unit
●		



Airflow monitor

The airflow monitor determines whether the fan is achieving its full operating capacity. Storage damage, dirty filter mats or jammed fan blades are promptly detected and reported by the sensor. The sensor contains an identifier so that it is automatically detected and set up by the CMC-TC system. Its switch point is adjustable. Power supply and data exchange to the sensor unit is via the attached connection cable. If required, extension cable RJ 12 may be used.

Packs of	Model No. DK
1	7320.550

Technical specifications:

Connection: RJ 12 connector, 6-pole on cable
Connection cable: Length 2 m
Note: The sensor can be operated with a temperature-controlled fan via the climate sensor unit.

To fit sensor unit:

I/O unit	Access unit	Climate unit
●		●



Voltage monitor

The voltage monitor picks off the mains voltage being monitored via the mains cable, and reports its status to a sensor unit: Voltage ON or voltage OFF. The monitor contains an identifier so that it is automatically detected and set up by the CMC-TC system. The connection cable (supplied loose) should be used for connection to the sensor unit. If required, extension cable RJ 12 may be used.

Packs of	Model No. DK
1	7320.600

Technical specifications:

Monitored rated voltage:

230 V AC 50/60 Hz

Connection:

IEC connector, RJ 12 jack, 6-pole

Connection cable: Length 2 m, RJ 12 connector 6/6 at both ends

Temperature application range:

+ 5 °C to + 45 °C

Protection category: IP 40



Also required:

Selection aid, see page 16.

To fit sensor unit:

I/O unit	Access unit	Climate unit
●		●



CMC socket strip

With integral

- Interference suppressor filter
- Overvoltage protection
- Alarm contact

In the event of interference caused by overvoltage, the connected active network components are protected. The relay message contact allows undervoltage and any malfunctions caused by overvoltage to be reported via the CMC in the network (SNMP trap). A green lamp on the strip indicates that the device is operational. The second protective device is the interference suppressor filter, which protects valuable equipment as a passive component.

Model No. DK	7200.630
--------------	----------

Technical specifications:

No. of sockets: 9

Length of strip: 650 mm

Rated voltage: 230 V AC, 50/60 Hz

Rated current: 16 A

Relay alarm output: RJ 11 jack

Load capacity of relay: 50 V DC 100 mA

Technical specifications

Overvoltage protection:

Arrester, utilisation category: D

Surge current resistance per conductor: 2.5 kA

Maximum surge current resistance: 8 kA



Also required:

A digital input module and an RJ 11 connection cable is needed to link the CMC socket strip to the CMC-TC system. Selection aid, see page 16.

To fit sensor unit:

I/O unit	Access unit	Climate unit
●		●



CMC extension unit

The CMC extension unit picks off three independently monitored mains voltages via power cords and forwards the measurements to the processing unit. It is linked to the PU via the RJ 45 connection cable on the P-I²C port (separate accessory). Up to two extension units may be connected in series to one PU. A separate power pack is not required. Alarm limits may be preset for all voltages.

Max. number per PU	Packs of	Model No. DK
2	1	7200.520

Technical specifications:

Voltage inputs:

3 x 100 – 230 V AC, IEC connector

Interface: I²C, P-I²C, max. cable length 2 m

Temperature application range:

+ 5 °C to + 45 °C

Protection category: IP 40



Also required:

Selection aid, see page 16.

To fit PU:

Processing unit
●



Vandalism sensor

The vandalism sensor contains a position-insensitive alarm contact and an identifier, so that it is automatically detected and set up by the CMC-TC system. Connection to the I/O sensor unit is via the connection cable (supplied loose). If required, extension cable RJ 12 may be used.

Packs of	Model No. DK
1	7320.540

Technical specifications:

Mercury-free, position-insensitive
Connection: RJ 12 jack, 6-pole
Connection cable: Length 2 m, RJ 12 connector 6/6 at both ends

To fit sensor unit:

I/O unit	Access unit	Climate unit
●		



Access sensor

Access sensors monitor doors, side panels or windows in the network enclosure. The magnet is secured to the moving part (e.g. side panel), whilst the reed contact is fastened to the immobile part (enclosure frame). The permanent magnet holds the reed contact in a closed position. When the door is opened or the side panel removed, the reed contact drops off and opens the circuit. This leads to an alarm in the CMC. The access sensor contains an identifier so that it is automatically detected and set up by the CMC-TC system. It is connected to a sensor unit via the connection cable (supplied loose). Up to five access sensors may be connected in series to one monitoring line, if necessary in conjunction with extension cable RJ 12. The jumper plug constitutes the termination.

Item	Packs of	Model No. DK
Access sensor	2	7320.530
VR mounting bracket	4	7200.335*

* Extended delivery times.

Technical specifications:

2 magnets (for mounting on the moving part, directly adjacent)
2 sensors with reed contact (for mounting on the enclosure frame)
Connection 1: RJ 12 jack, 6-pole (connection to sensor unit)
Connection 2: RJ 12 jack, 6-pole (series connection with additional access sensors or termination with the jumper plug)
2 RJ 12 jumper plugs for termination
2 connection cables: Length 2 m, RJ 12 connector 6/6 at both ends

To fit sensor unit:

I/O unit	Access unit	Climate unit
●	●	●



CMC motion detector

The motion detector may be used either in network enclosures or in rooms. Any modifications to the enclosure, such as opening a door or side panel, are reported. The motion detector is also capable of detecting human presence in the room or in front of the data enclosure. The detector contains an identifier so that it is automatically detected and set up by the CMC-TC system. Power supply and data exchange to the sensor unit is via the connection cable (supplied loose). If required, extension cable RJ 12 may be used.

Packs of	Model No. DK
1	7320.570

Technical specifications:

Alarm type: Infrared (IR) detector
Range: max. 7 m
Current rating: max. 30 mA/24 V DC
Connection: RJ 12 jack, 6-pole
Connection cable: Length 2 m, RJ 12 connector 6/6 at both ends
Dimensions:
 W x H x D: 59 x 102 x 32 mm

To fit sensor unit:

I/O unit	Access unit	Climate unit
●		●



Analog sensor input module

The input module facilitates the connection of individual, external analog sensors (4 – 20 mA) to the I/O sensor unit. As an adaptor, it performs an identification function, so that an external sensor is automatically identified and set up by the CMC-TC system. Sensors with 4 – 20 mA signal output and 24 V DC operating voltage (max. 50 mA) may be connected. The internal power source of the CMC-TC is made available. Connection to the sensor unit is via the connection cable (supplied loose). If required, extension cable RJ 12 may be used.

Packs of	Model No. DK
1	7320.520

Technical specifications:

Analog input: 4 – 20 mA at 24 V DC
Max. current output of module: 50 mA
 Sensors without GND may also be used.
Connection: RJ 12 jack, 6-pole
Connection cable: Length 2 m, RJ 12 connector 6/6 at both ends
Sensor connection:
 Pull-off terminal strip, 3-pole

To fit sensor unit:

I/O unit	Access unit	Climate unit
●		



Digital sensor input module

The input module allows individual, external digital sensors to be connected to a sensor unit. As an adaptor, it performs an identification function, so that an external sensor is automatically identified and set up by the CMC-TC system. External sensors and transmitters must have a floating contact (normally closed or normally open), because the module provides the internal power source. Connection to the sensor unit is via the connection cable (supplied loose). If required, the extension cable RJ 12 may be used.

Packs of	Model No. DK
1	7320.580

Technical specifications:

Floating external sensor contact:
 Voltage min. 24 V DC load capacity
Current: min. 10 mA load capacity
Connection: RJ 12 jack, 6-pole
Connection cable: Length 2 m, RJ 12 connector 6/6 at both ends
Sensor connection:
 Pull-off terminal strip, 3-pole

To fit sensor unit:

I/O unit	Access unit	Climate unit
●	●	●

In conjunction with the access unit, any given door release system (e.g. transponder) may be connected with a floating relay contact via the input module.



Digital actuator output module

The actuator module allows individual, external extra-low voltage actuators to be switched via a changeover contact. As an interim relay, it performs the functions of identification and isolation, so that an actuator is automatically detected and set up by the CMC-TC system. Connection to the I/O sensor unit is via the connection cable (supplied loose). If required, extension cable RJ 12 may be used. At the output end, the module contains a pull-off terminal strip for assignment with actuator cables. The power supply to the actuator must be provided externally. The output relay can be switched remotely via SNMP or HTTP. Alternatively, alarm links can also be created with alarm inputs.

Packs of	Model No. DK
1	7320.590

Technical specifications:

Condition of the actuator: $\cos\Phi = 1$
Max. load of switch contact:
 1 A, 30 V DC and 0.5 A, 48 V AC
Max. switching voltage: 48 V AC; 48 V DC
Max. switched current: 1 A
Max. switching load: 30 W, 62.5 VA
Min. switched current: 1 mA at 5 V DC
Connection: RJ 12 jack, 6-pole
Connection cable: Length 2 m, RJ 12 connector 6/6 at both ends
Sensor connection:
 Pull-off terminal strip, 3-pole

To fit sensor unit:

I/O unit	Access unit	Climate unit
●		



Room door output module

The room door output module allows external door opener systems to be switched via a changeover contact. As an interim relay, it performs the functions of identification and isolation, so that a door opener is automatically detected and set up by the CMC-TC system. Connection to the access unit is via the connection cable (supplied loose). If required, extension cable RJ 12 may be used. At the output end, the module contains a pull-off terminal strip for assignment with actuator cables. Power supply to the door opener must be provided externally.

Packs of	Model No. DK
1	7320.740

Technical specifications:

Condition of the actuator: $\cos\Phi = 1$
Max. load of switch contact: 1 A, 30 V DC and 0.5 A, 48 V AC
Max. switching voltage: 48 V AC; 48 V DC
Max. switched current: 1 A
Max. switching load: 30 W; 62.5 VA
Min. switched current: 1 mA at 5 V DC
Connection: RJ 12 jack, 6-pole
Connection cable: Length 2 m, RJ 12 connector 6/6 at both ends
Sensor connection: Pull-off terminal strip, 3-pole

To fit sensor unit:

I/O unit	Access unit	Climate unit
	●	



CMC alarm signal lamp

The alarm signal lamp serves as a collective fault signal for all alarms in the CMC, e.g. excess temperature, fan defect, smoke alarm etc. The CMC offers a user-friendly menu allowing the operator to select which message will affect the CMC alarm relay. The alarm signal lamp is activated via the alarm relay. The lamp can be attached to the network enclosure or any other desired position, e.g. in the corridor. The RJ 12 connection cable is required for connection to the PU.

Item	Model No. SZ
LED steady light component 24 V DC	2372.000
Connection component	2368.010

Technical specifications:

Rated operating voltage: 24 V DC
Rated current: 60 mA




Also required:

Selection aid, see page 16.

To fit PU:

Processing unit
●

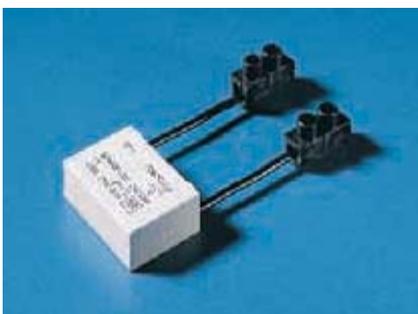


Interference suppression capacitors for fans

The capacitors are used for the interference suppression of fans with self-starting shaded pole motors. One capacitor should be connected directly parallel to the mains voltage for each fan unit. The capacitors are equipped with a terminal, which means that they are easily fitted to the fan cable.

Design	Packs of	Model No. DK
100 nF	20	7200.490

Technical specifications:

Dielectric strength: 275 V AC
Capacity: 100 nF
Type: X2

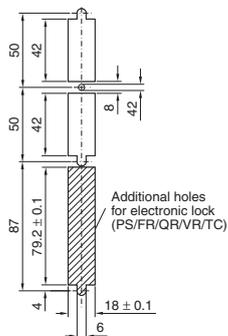

Handle systems with electromagnetic latching

The lock unit consists of a Rittal handle system, the handle of which is electromagnetically latched. It contains an identifier so that it is automatically detected and set up by the CMC-TC system. Power supply and data exchange to the access unit is via the attached connection cable. If required, the RJ 12 connection cable (supplied loose) may be used. An access sensor (DK 7320.530) is always required for door monitoring. With the door closed and the handle locked home, latching is activated by switching on the lock magnet.

The CMC-TC allows the handle to be released by deactivating the lock magnet, so that the door can be opened. This deactivation can be initiated via an access unit such as smart card readers, magnetic card readers, coded locks and/or network management systems. The handle system likewise contains handle monitoring. The CMC-TC raises the alarm if the handle is not swung in and locked home after closing the door.

The supplied push-button insert can also be exchanged for **lock inserts**.

Note:

When using the Ergoform-S handle, an additional hole is required.

To fit sensor unit:

I/O unit	Access unit	Climate unit
	●	

Handle system	Model No. DK
TS comfort handle	7320.720
Ergoform-S handle for FR, PS, TC, VR	7320.700
Ergoform-S handle for QR	7320.710

Note:

The locking bars listed below are required for PS and FR glazed doors:

Locking bars

Design	Model No. DK
Lower door locking bar for 2000 mm high PS enclosures	7200.371
Lower door locking bar for 2000 mm high FR enclosures	7200.372

Other sizes available on request.

Technical specifications:

Rated voltage: 24 V DC

Rated current: max. 100 mA

Connection cable:

Length 3 m, RJ 12 connector

Connection cable:

Length 2 m, RJ 12/RJ 12 connector

Coupler for extension:

RJ 12/RJ 12 jack

Temperature application range:

+5°C to +40°C

Protection category: IP 40



Also required:

Selection aid, see page 16.



Universal lock unit

The security lock consists of a base unit and a lock counterpart. The base unit is attached to the enclosure frame, whilst the lock counterpart is attached to the door. A mechanical setting allows you to choose between two states: at zero current when open/at zero current when closed.

In order to identify the operating mode used, one of the two identifier modules (supplied loose) should be used, to allow automatic detection and set-up by the CMC-TC system. Power supply and data exchange is via the access unit, using the identifier module and connection cables (supplied loose). If required, extension cable RJ 12 may be used.

An access sensor (DK 7320.530) is always required for door monitoring.

Technical specifications:

Rated voltage: 24 V DC

Rated current: 140 mA

Temperature application range:

+ 10 °C to + 40 °C

Note:

Mounting kits for the various different enclosure types and enclosure doors are listed in the table.

To fit sensor unit:

I/O unit	Access unit	Climate unit
	●	

Lock unit	Model No. DK
Packs of 1 kit	7320.730

Installation kit	Model No. DK
PS steel door	7200.611
PS alum. glazed door	7200.612
FR steel door*	7200.613
FR glazed door*	7200.614
PS steel door	7200.615
TS glazed door	7200.616
VR enclosure	7200.617

* Attachment in 600 mm wide FR enclosures is only possible with recessed mounting of the 482.6 mm (19") or metric attachment levels.

Supply includes:

1 base unit with connection cable 0.1 m,

RJ 12 connector

1 lock counterpart

2 identifier modules with RJ 12 jack, 6-pole

(connection to access unit),

RJ 12 jack, 6-pole

(connection to universal lock)

1 connection cable for identifier modules,

2 m, RJ 12/RJ 12 connector without

mounting kit.



Also required:

Selection aid, see page 16.



Smart card reader/ magnetic card reader/ coded lock

The door handle is released for authorised individuals who have identified themselves with a smart card/magnetic card/combination code. Smart card readers/magnetic card readers/coded locks are mounted above the enclosure handle and may also function as a central unit to release several doors.

The entire access process can also be registered with a network connection to the CMC-TC.

Technical specifications:

Rated voltage: 24 V DC

Rated current: max. 20 mA

Interface: I²C bus

Smart card type: I²C chip

Magnetic card type:

Magnetic strip card with data on track 2

Note:




Smart card readers/magnetic card readers/coded locks can only be used in conjunction with the CMC-TC and an electric lock. 3 cards are supplied with the smart card reader/magnetic card reader. Each card contains a four-digit code, which is different on all three cards. All cards are access-authorised. On the coded lock, the code may be entered directly.

Authorised codes can be set in the CMC-TC via RS 232 or Telnet. The input code is transmitted to the CMC-TC and, where applicable, to the network management system, via the I²C bus. A mounting adaptor for a TS aluminium glazed door is supplied loose with every reader.

	Model No. DK
Smart card reader	7320.750
Magnetic card reader	7320.760
Coded lock	7320.770

To fit sensor unit:

I/O unit	Access unit	Climate unit
	●	

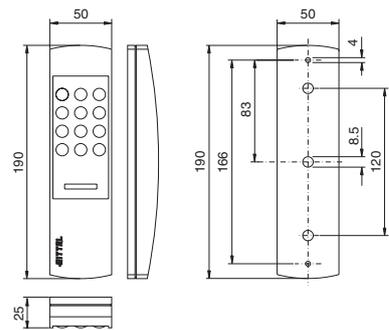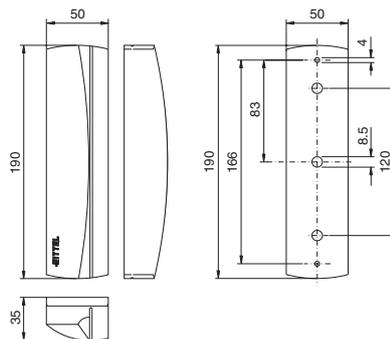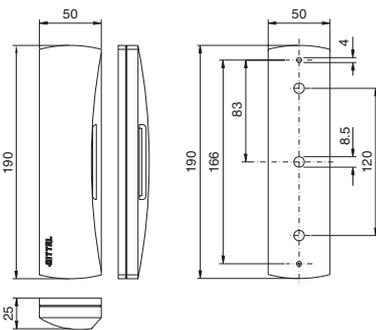

Adaptor for reader units

The adaptors are used to install the reader units. They are screw-fastened between the designer profile of the door frame and the reader unit. No adaptor is required for shallow mounting levels. For TS aluminium glazed doors, an adaptor is supplied with every reader unit. One adaptor is required for each reader unit.

Glazed door enclosure type	Packs of	Model No. DK
VR	10	7200.344
PC	10	7200.345
PS	10	7200.346
TS design	10	7200.347


Type PC: For PC glazed doors

Type VR: For VR glazed doors and VR sheet steel doors

Type PS: For PS aluminium glazed doors

CMC monitoring system

Software for Computer Multi Control

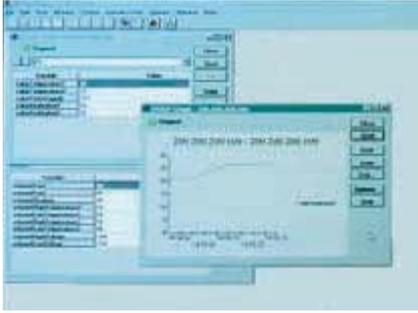

Network management systems

By using SNMP management programs such as HP Open View or Novell Manage Wise, it is possible to incorporate and address the CMC-TC system via SNMP. The required MIB is included with the supply. Incorporating the MIB entails a simple copying process. Standard MIB-II (RFC 1213) is also supported. It is included with the supply of the network management system (NMS). The private MIB contains all the required system variables and can be conveniently linked to the functions of software such as HP Open View, Novell Manage Wise etc.

Note:

The MIB is also available as a download on the Internet at www.rittal.de and is included with the supply of every CMC-TC system.



Rittal SNMP manager based on Java

The SNMP manager is a Java-based product, enabling it to be used in various operating systems. The only requirement is that Java Development Kit JDK 1.3 or Java Runtime Environment JRE 1.3 should be installed on the corresponding system. Java can be downloaded from the Internet at www.sun.com.

The SNMP software is open. Any given MIBs may be incorporated. The MIB browser is user-friendly and can be converted into an individual interface. Tables and various graphical representations of the values being monitored can also be compiled. A graphical interface is pre-configured for the CMC.

The

- MIB of the CMC-TC master system 7320.000
- MIB of the processing unit 7320.100
- MIB of the power control unit 7200.000 can also be incorporated.


A trap receiver serves to report the alarms. All key alarm data is included in this alarm list. The administrator is notified of every incoming alarm by an alarm window.

Advantages:

- Open to operating systems, thanks to Java (Windows/Linux)
- Open to the MIBs of various SNMP devices
- User-friendly MIB browser
- Individual graphical interface
- Graphical interface for the CMC
- Compatible with the MIB of CMC-TC and PCU
- Trap alarm receiver
- Immediate notification of alarms on screen
- Data logging function
- Trap file start function

Note:

The software is available free of charge from the Internet. www.rittal.de

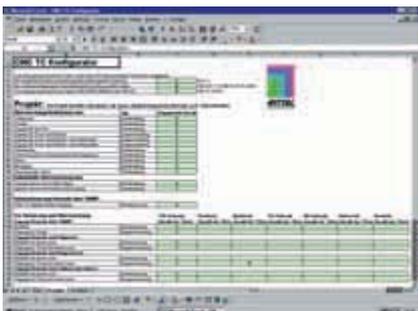

CMC-TC configurator

The CMC-TC configurator automatically compiles all the modules and accessories required for a CMC project. The user simply enters the monitoring requirements and the ambient conditions. The outcome is a list containing all the item numbers required for the project. In this way, a project can be compiled quickly and effectively. The prerequisite for working with this software is MS Excel, Version 97 or above.

The CMC-TC configurator is available for downloading free of charge from the Internet at www.rittal.de.



CMC-TC manager

The new CMC-TC manager allows all Rittal SNMP agents to be managed in a single software package.

- CMC II (7200.100)
- PCU Web sockets (7200.000)
- CMC-TC processing unit (7320.100)

The graphical interface provides the relevant information about the system and offers the option of configuring the systems via SNMP.

The only requirement is that Java Runtime Environment JRE 1.3 should be installed on the corresponding PC system. Java is available for downloading from the Internet at www.sun.com.

The various products (PCU, CMC II, CMC-TC) can be sorted according to types or locations. All important alarm messages enter the built-in trap receiver, and can be recorded with the logging function. Alarm messages can be forwarded directly using the e-mail function. The search function is used to distinguish and automatically list the SNMP agents.



Advantages:

- Open to operating systems, thanks to Java (Windows/Linux)
- Graphical information and operator interface for:
 - CMC II
 - Web socket strip PCU
 - CMC-TC/processing unit
- Full integration of the management information base (MIB) of Rittal systems
- Trap receiver with logging function
- E-mails are sent in the event of trap alarm messages
- System search function
- User-oriented system listing on the basis of locations

Note:

The software is available free of charge via the Internet.

www.rittal.de



Infosim StableNet™ CMC-TC with HP Open View Integration

Integration into HP Open View NNM means that StableNet™ CMC-TC is centrally and permanently available. The management functions of HP Open View have been extended to optimum effect: NNM monitors the traps occurring in Rittal CMC-TCs and forwards them to StableNet™ CMC-TC.

The MIB of processing unit 7320.100 of the CMC-TC system has also been incorporated.

Functions:

- Integral trap manager
- Various alarm functions, e.g. e-mail, SMS etc.
- Integral MIB browser (cf. illustration)
- Graphical display of the monitored values with diagrams and tables
- Individual representation and organisation of the monitoring tools
- Pre-configured graphical interface for the CMC-TC
- Microsoft® Outlook® "look and feel"
- Multi-platform (JAVA)



Other products from the StableNet™ suite with the option of integrating the StableNet™ CMC-TC manager:

StableNet™ ARC

Advanced Router Configuration

- Management of all network components and CMC-TCs from within HP Open View NNM
- Efficient management of routers and switches

StableNet™ PME

Performance Management Engine

- Evaluation of the data obtained with StableNet™ CMC-TCs by means of comprehensive reporting functions
- Various opportunities for measuring network performance

Note:

Further information is available on the Internet at:

www.infosim.net

or by e-mailing your enquiry to info@infosim.net

- Industrial enclosures
- Electronic packaging
- System climate control
- Power distribution
- IT solutions
- Communication systems

Global service

Rittal combines the international network capabilities of a global player with market-specific, personalised customer care.

We use the dynamic process of communication to build upon existing common ground and inspire new areas of co-operation.

Thanks to its regional proximity, Rittal is familiar with the needs and requirements of its customers, and translates these into fast, cost-effective solutions.

Rittal GmbH & Co. KG · P.O. Box 1662 · D-35726 Herborn
Telephone: (02772) 505-0 · Telefax: (02772) 505-2319
eMail: Info@rittal.de · www.rittal.com