


LED DRIVER

für Netzspannungen von 100-240V
for mains voltages of 100-240V
para tensiones de red de 100-240V

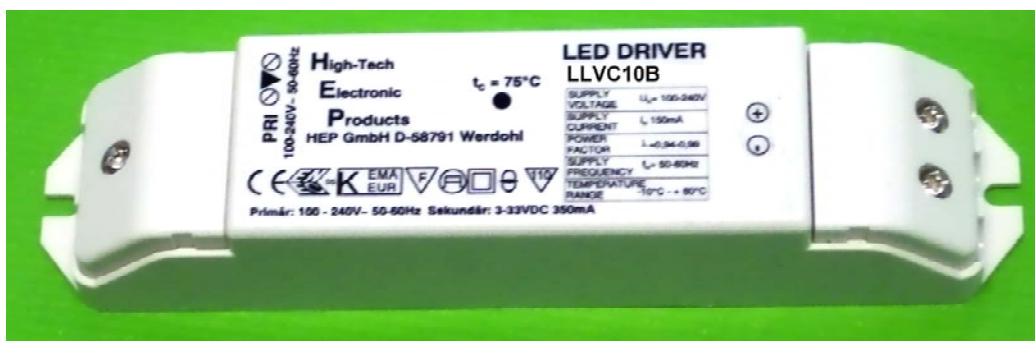

Konstantstromquelle

- Konstanter Ausgangsstrom 700mA

Teillastbereich
3-10W

Kurzschlusschutz

Überlastschutz

Constant current source

- Constant output current 700mA

Shared load operation
3-10W

Short circuit protection

Overload protection

Fuente de corriente constante




- Corriente de salida constante de 700mA

Funcionamiento con carga parcial

- 3-10W

Protección contra cortocircuitos

Protección contra sobrecarga

Best.-Nr.: Order No.: No ped.:	LLVC10B UNI	LLVC10BT UNI
Teillastbereich Shared load operation Funcionamiento con carga parcial	1-3 High power LED 3W in Serie, 1-2 High power LED 5W in Serie 1-3 High power LED 3W in series, 1-2 High power LED 5W in series 1-3 High power LED 3W en serie, 1-2 High power LED 5W en serie	
Sekundärspannung Secondary voltage Tensión secundaria	4-16V / 700mA DC	
Nennspannung Rated voltage Tensión nominal	100-240V~	
Netzfrequenz Mains frequency Frecuencia de red	50-60Hz	
Kurzschlusschutz Short circuit protection Protección contra cortocircuito	ja yes si	
Überlastschutz Overload protection Protección contra sobrecarga	ja yes si	
Temperaturschutz Thermal protection Protección térmica		ja yes si
Schutzklasse Protection class Grado de protección	II	
Abmessungen L x B x H Measurements l x w x h Dimensiones L x A x H	167 x 38 x 29,5mm	
Prüf-/ Kennzeichen Approbations Homologaciones	  	

Anschaltbild
Circuit diagram
Diagrama de circuito

