

Fastrax Dome System

Speed Dome Color Camera



Fastrax III E

MAIN FEATURE

- 4.9-inch Acrylic bubble
- Up to 240 programmable preset positions
- Optional Manual/Auto Night shot and slow shutter function enhances
- Diagonal Scanning (Vector Scanning)
- Optional Indoor/Outdoor Pendant mount, flush mount, parapet mount and roof top mount
- Auto focus/Iris with Manual Override
- AC Line Lock (Remote Control)
- Quick Detachable (Hot Swap)
- Offset (Recalibration) of Preset Angle
- Data Up/Down load (Preset, Tour, Etc..)
- 8 Privacy Zone
- Easy DVR and multiplexer remote control
- 5" Color LCD keyboard

26x/23x/22x/18x

Optical Zoom Fastrax Dome System


Specifications

MODEL	HID2404SSE11X	HID2404HCE11X	HID2404HTE11X	HID2404SME11X	HID2404SLE11/10X
MODULE					
CCD Type	1/4" Type Ex-view CCD	1/4" Type Super HAD CCD	1/4" Type Super HAD CCD	1/4" Type Ex-view CCD	1/4" Type Super HAD CCD
Optical / Digital Zoom	26X/12X	23X/10X	22X/11X	18X/12X	18X/12X
Resolution (NTSC/PAL)	470/460TVL	470/470TVL	470/460TVL	470/460TVL	470/460TVL
Focal length	3.5mm~91mm	3.6mm~82.8mm	3.9mm~85.8mm	4.1mm~73.8mm	4.1mm~73.8mm
Min. Illumination					
-Normal (50IRE)	1.0 Lux	3.0 Lux	1.0 Lux	0.7 Lux	1.0 Lux
-Low Shutter (1/4(3))	0.07 Lux	-	0.02 Lux	-	-
-ICR on	0.15 Lux	0.2 Lux	-	0.05 Lux	-
-ICR on & Low Shutter	0.01 Lux	0.02 Lux	-	0.01 Lux	-
Image Stabilizer	NO	NO	NO	NO	NO
WDR	NO	YES	NO	NO	NO
ICR on	YES	YES	NO	YES	NO
Angle of View	3.5mm : 54.2° 91mm : 2.2°	3.6mm : 54° 82.8mm : 2.5°	3.9mm : 49° 85.8mm : 2.4°	4.1mm : 48° 73.8mm : 2.7°	4.1mm : 48° 73.8mm : 2.7°
DOME					
Panning angle (Optional)	360° continuous rotation				
Alarm (Optional)	8 inputs (NC/NO), 4 relay outputs				/ NO(HID2404SLE10X only)
Tilt angle	-10° ~ 90°				
Auto Scan	1 auto pan & 8 auto scan capability				
Preset	240 presets with individual dwell time				
Pattern	4 patterns (recording up to 240 sec)				
Tour	8 tours (consist of 32 functions/1tour)				
Max Speed	380°/sec				
Area Title	it can be divided 16 areas with 16 characters of title				
Privacy Zone	8 privacy zone masking (2 methods selectable : mark / video off)				

* Specifications subject to change without notice *

MOUNT OPTIONS


* BASIC

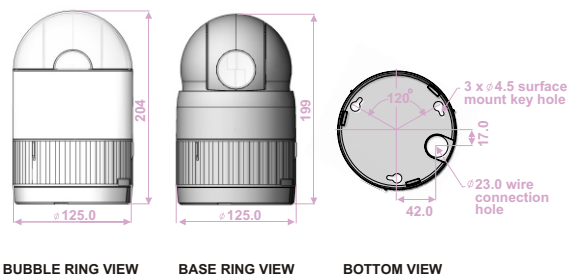


* PARAPET MOUNT & ROOF TOP MOUNT



* INDOOR/OUTDOOR HOUSING

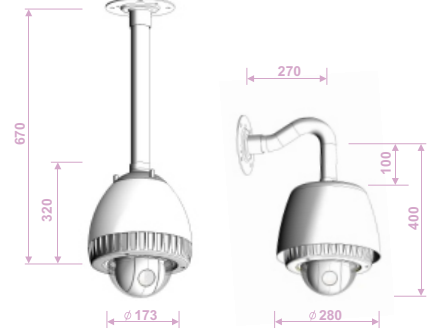

* CEILING MOUNT

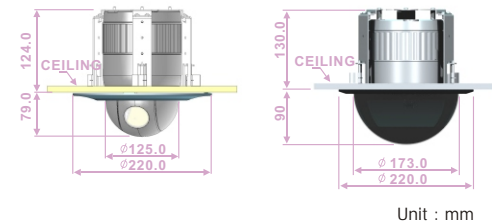

Unit : mm

SPECIAL FEATURE

Maximum 216~300zoom

optical zoom 18x, 22x, 23x, 26x and digital zoom 12x



Preset positioning

240 preset positions (with different settings for pan, tilt, zoom and focus)



Day and Night mode

intelligent selectable switching ICR (infrared cut filter)



Privacy zone masking

8 privacy zone masking
2 methods selectable : mark / video off

