





CANON TOPLITE EX

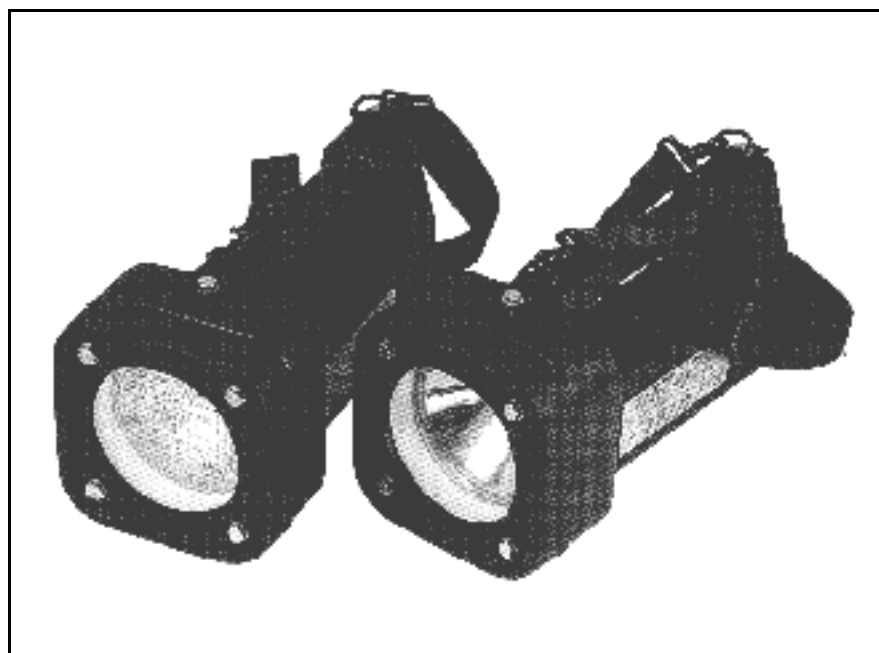

Toplite T3 Portable Searchlight Technical Specification

Product reference		TL-9050T3	TL-9055T3
Product description		50W high-power spotlight, rechargeable inspection lamp	35W high-power floodlight, rechargeable worklight
Code		EEx e n ib IIC T3	
Apparatus standard		EN50 014, EN50 019, EN50 028, EN50 020	
Type of protection		"e" increased safety, "m" encapsulation, "ib" intrinsic safety	
Area of classification		Zones 1 and 2, gas groups IIA, IIB and IIC	
Temp. classification		T3	
Ambient temperature		20°C to +40°C	
Certification		BASEEFA Certificate No. Ex 9203405	
Enclosure		Polyethylene, anodized	
Lens		Toughened glass	
Light source	Art. no.	TL-9062T3	TL-9063T3
	Type	Sealed beam unit with halogen filled filament bulb	Sealed beam unit with filament bulb
	Volts	12.8V	12.8V
	Watts	50W	33W
	Intensity	160,000cd	115,000cd
	Beam	3.5" x 4"	Trapezoidal flood
	Life	100 hrs (at 12.8V)	300 hrs (at 12.8V)
Power source	Pl. no.	TL-6497	
	Type	Rechargeable battery, nickel cadmium	
	Volts	12V	
	Capacity	4.3Ah	
	Life	up to 1000 recharges/cycles	
Light duration	70 mins (130 mins low power) 100 mins (190 mins low power)		
Ingress protection	IP 67		
Weight	4.0 kg		

Topline 905013
90cm high beam (topcase 4.5l)
Max. clearances: 10cm at the 2250mm
Topline 905518
120cm high beam (topcase 20l)
Max. clearances: 10cm at the 2250mm

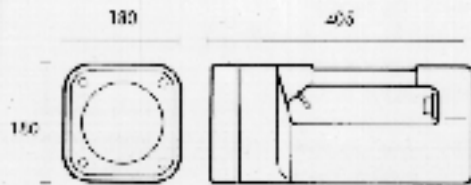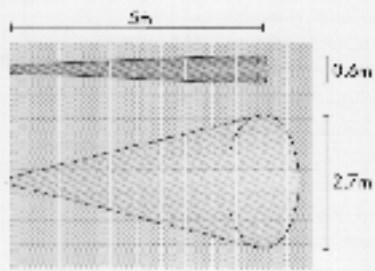

SABORIT INTERNATIONAL

Saborit International, S.L. Unipersonal - Calle Ramonet, 12 - 28033 MADRID
Teléfono : 91 383 19 20 Fax : 91 766 35 58