



HAZARD LAMP HL-95

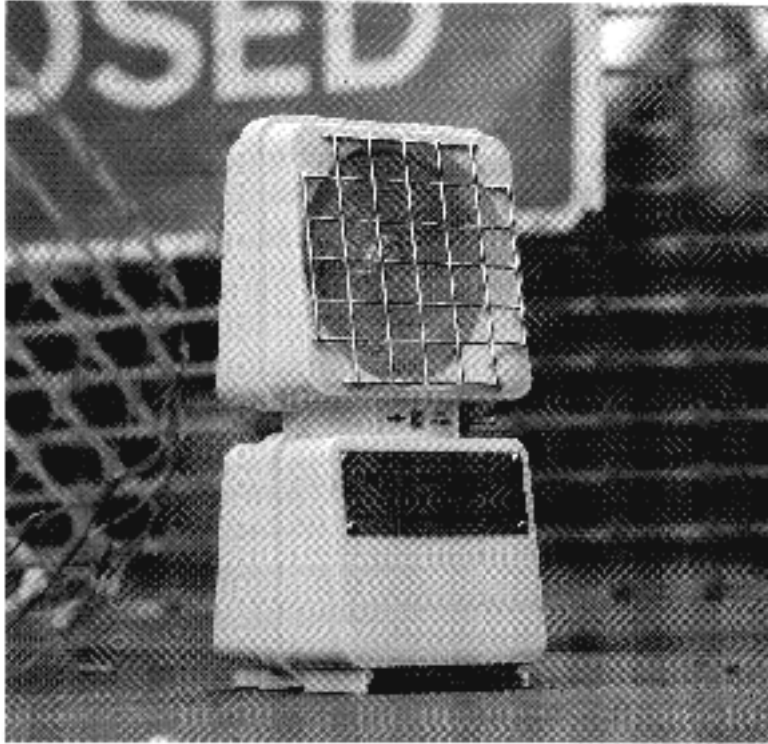

HL-95 Safety Hazard Lamp Technical Specification		
Product reference	HL-95	
Product description	Non-vibrating operated safety hazard lamp	
Code	EEC & ICTA	
Applicable standard	EN50074, EN50022	
Type of protection	Flameproof	
Area of application	Zone 0, 1 and 2, groups I, II and III	
Temp. classification	T4	
Ambient temperature	-20°C to +20°C	
Certification	SGS Certification, No. Ex 9500020	
Enclosure	Polycarbonate with metal lens guard	
Lens	Polycarbonate, colour as light source	
Light output	Calculated in accordance with requirements for IEx II, I, II, III, Exd, Exe, Exib	
Light source	Type	LED module LED
	Colour	As per standard and to order
Power source	Type	10-3155X
	Type	AC 240V or capacitor secondary cell battery
	Voltage	5.6V
	Capacity	20Ah
	Weight	1.7kg
	Dimensions	L: 100x W: 100x H: 140mm
Light duration	200hrs (charging mode), 2000hrs (discharge)	
Ingress protection	IP20	
Weight (incl. battery)	2.2kg	



SABORIT INTERNATIONAL

Saborit International, S.L. Unipersonal – Calle Ramonet, 12 – 28033 MADRID
Teléfono : 91 383 19 20 Fax : 91 766 35 58