

# MICA HL-100 Y HL-200

HL-100 (2) battery pack  
HB-65 (NiCd) battery  
HB-57 (NiMH) battery



HL-100 Lamp  
(helmetband version)




US Charging holder




Batterclip for HB batteries


(STANDS FOR ONLY)

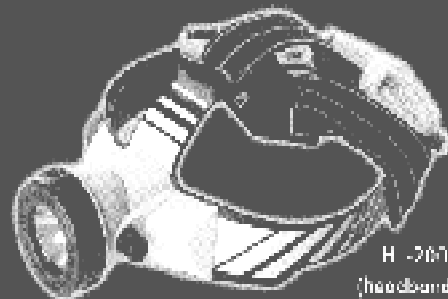

HL-200 Lamp  
(headband version)



HL-200 Charger (for one or two lamps)



HL-200 Battery  
(NiMH 8V, 1350mAh)

<b>MODEL</b>	HL-100 Rechargeable lamp																					
<b>Product description</b>	HL-100 RR Rechargeable lamp HL-100 RP Rechargeable lamp with head mount HL-100 RP Rechargeable lamp																					
<b>Cable length</b>	100 mm																					
<b>Power source</b>	Rechargeable battery (60 mAh x 3x AAA)																					
<b>Operating temperature</b>	-20°C to 50°C																					
<b>Beam</b>	Primary bulb: Halogen (4.2 x 4.0) P14.5/2.5/26 Lifetime: 100 h  Secondary bulb: White LED (3.5 x 3.5) P14.5/2.5/26 Lifetime: 100,000 h																					
<b>Beam type</b>	spot																					
<b>Operating time</b>	<table border="0"> <tr> <td><b>HL-100 RR/RL:</b></td> <td><b>Half power:</b></td> </tr> <tr> <td>2.4 watt = 10 h</td> <td>2.4 watt = 20 h</td> </tr> <tr> <td>4 watt = 5 h</td> <td>4 watt = 10 h</td> </tr> <tr> <td>6 watt = 3.33 h</td> <td>6 watt = 10 x 30 min</td> </tr> <tr> <td>White LED = 14 days</td> <td></td> </tr> <tr> <td><b>HL-100 RP:</b></td> <td><b>Half power:</b></td> </tr> <tr> <td>2.4 watt = 10 h</td> <td>2.4 watt = 20 h</td> </tr> <tr> <td>4 watt = 5 h</td> <td>4 watt = 10 h</td> </tr> <tr> <td>6 watt = 3.33 h</td> <td>6 watt = 10 h</td> </tr> <tr> <td>White LED = 14 days</td> <td></td> </tr> </table>		<b>HL-100 RR/RL:</b>	<b>Half power:</b>	2.4 watt = 10 h	2.4 watt = 20 h	4 watt = 5 h	4 watt = 10 h	6 watt = 3.33 h	6 watt = 10 x 30 min	White LED = 14 days		<b>HL-100 RP:</b>	<b>Half power:</b>	2.4 watt = 10 h	2.4 watt = 20 h	4 watt = 5 h	4 watt = 10 h	6 watt = 3.33 h	6 watt = 10 h	White LED = 14 days	
<b>HL-100 RR/RL:</b>	<b>Half power:</b>																					
2.4 watt = 10 h	2.4 watt = 20 h																					
4 watt = 5 h	4 watt = 10 h																					
6 watt = 3.33 h	6 watt = 10 x 30 min																					
White LED = 14 days																						
<b>HL-100 RP:</b>	<b>Half power:</b>																					
2.4 watt = 10 h	2.4 watt = 20 h																					
4 watt = 5 h	4 watt = 10 h																					
6 watt = 3.33 h	6 watt = 10 h																					
White LED = 14 days																						
<b>Lens</b>	Tempered glass (3mm)																					
<b>Enclosure</b>	High impact polycarbonate (Nylon)																					
<b>Colour</b>	Black and yellow Optional colour on request																					
<b>Battery dimensions</b>	50 mm x 14.5 mm x 9.5 mm (162 mm (L))																					
<b>Weight with battery</b>	HL-100: 1.40 kg HL-100: 1.27 kg																					
<b>Other features</b>	<ul style="list-style-type: none"> <li>Capacitance indicator for battery</li> <li>Low battery warning</li> <li>Deep discharge prevention</li> <li>IP rating: IP67 (Waterproof)</li> <li>Full automatic charge: L85</li> <li>10 500000 cycles (at 25°C, max. 100% max)</li> <li>Max. allowed I = 1200mA or 2000mA</li> </ul>																					

<b>MODEL</b>	HL-200 Rechargeable lamp											
<b>Product description</b>	HL-200 RP Rechargeable work head mount HL-200 RP Rechargeable lamp											
<b>Power source</b>	Rechargeable battery (60 x 4 x 1.5) 150 mAh Improvement of the head mount 3x3 rechargeable system											
<b>Operating temperature</b>	-20°C to 50°C											
<b>Beam</b>	Primary bulb: Halogen (2.5 x 2.5) P14.5/2.5/26 Lifetime: 100 h  Secondary bulb: White LED (3.5 x 3.5) P14.5/2.5/26 Lifetime: 100,000 h											
<b>Beam type</b>	spot											
<b>Operating time</b>	<table border="0"> <tr> <td><b>Full power:</b></td> <td><b>Half power:</b></td> </tr> <tr> <td>2.4 watt = 7 x 10 min</td> <td>2.4 watt = 5 x 10 min</td> </tr> <tr> <td>4 watt = 1 x 40 min</td> <td>4 watt = 5 h</td> </tr> <tr> <td>6 watt = 1 x 30 min</td> <td>6 watt = 1 h 30 min</td> </tr> <tr> <td>White LED = 23 days</td> <td></td> </tr> </table>		<b>Full power:</b>	<b>Half power:</b>	2.4 watt = 7 x 10 min	2.4 watt = 5 x 10 min	4 watt = 1 x 40 min	4 watt = 5 h	6 watt = 1 x 30 min	6 watt = 1 h 30 min	White LED = 23 days	
<b>Full power:</b>	<b>Half power:</b>											
2.4 watt = 7 x 10 min	2.4 watt = 5 x 10 min											
4 watt = 1 x 40 min	4 watt = 5 h											
6 watt = 1 x 30 min	6 watt = 1 h 30 min											
White LED = 23 days												
<b>Lens</b>	Tempered clear (3mm)											
<b>Enclosure</b>	High impact polycarbonate (Nylon)											
<b>Colour</b>	Black and yellow Other colours on request											
<b>Weight with battery</b>	500 g											
<b>Other features</b>	<ul style="list-style-type: none"> <li>Low battery warning</li> <li>Deep discharge prevention</li> <li>IP rating: IP67 (Waterproof)</li> <li>Full automatic charge: L85</li> <li>10 000 000 cycles (at 25°C, max. 100% max)</li> <li>Max. allowed I = 1200mA or 2000mA</li> </ul>											

## SABORIT INTERNATIONAL

Saborit International, S.L. Unipersonal – Calle Ramonet, 12 – 28033 MADRID  
Teléfono : 91 383 19 20 Fax : 91 766 35 58