



# Luminaria de empotrar "Versátil"


## Recessed luminaire "Versatile"

# DO P


### FOTOMETRIA PHOTOMETRY

DO P 2x58

D. P. I. 45 Cd/div



$\eta$	63.00%
CIE:	46.5/78.2/96.1/100/63.00
DIN:	A40
UTE:	0,63D+0,00T

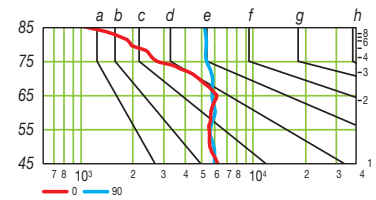

$\pi$	
G	(lx)
A	1.15 2000 1000 500 $\leq 300$ - - - -
B	1.5 - 2000 1000 500 $\leq 300$ - - - -
C	1.85 - - 2000 1000 500 $\leq 300$ - - - -
D	2.2 - - - 2000 1000 500 $\leq 300$ - - - -
E	2.55 - - - - 2000 1000 500 $\leq 300$ - - - -
	a b c d e f g h



**Carcasa**  
Chapa de acero pintada en blanco calidad poliéster.

**Difusor**  
Plancha prisma apoyada sobre cerco perimetral lacado en blanco. Muelles para sujeción del conjunto cerco-placa.

**Aplicación**  
Iluminación general de espacios con bajo nivel de representación.

**Housing**  
White polyester painted steel chassis.

**Diffuser**  
Prismatic diffuser which sits on the white painted metal frame. Frame includes springs for fixing whole to the chassis.

**Application**  
General lighting for spaces with no special requirements.



MOD	A	B	C	Kg.	Vol/m <sup>3</sup>
DO-4x18	595	595	98	6,1	0,0426
DO-3x18	595	595	98	6,0	0,0426
DO-2x18	595	295	98	3,4	0,0227
DO-4x36	1.195	595	98	10,8	0,0801
DO-3x36	1.195	595	98	10,3	0,0801
DO-2x36	1.195	295	98	6,3	0,0406
DO-2x58	1.547	295	98	7,7	0,0560

