






Luminaria de superficie

Surface luminaire

MI VM60

FOTOMETRIA PHOTOMETRY

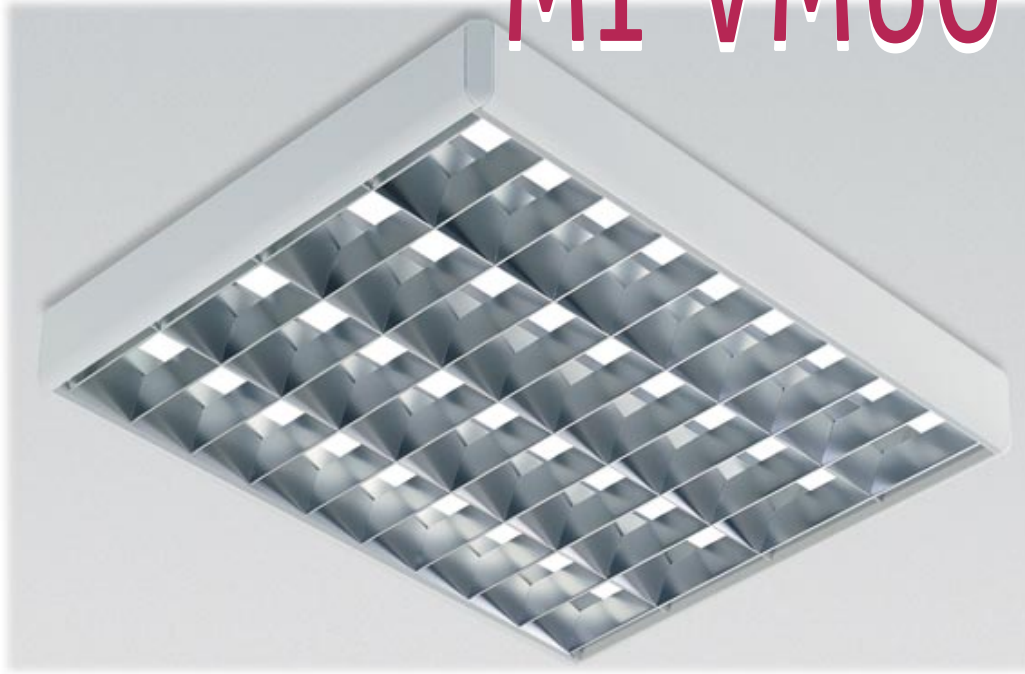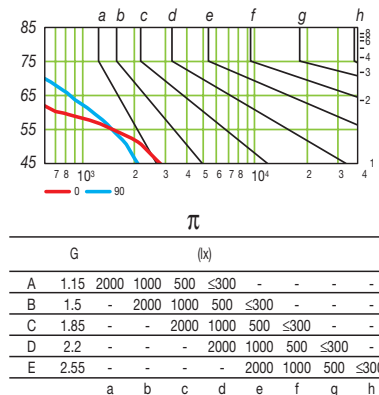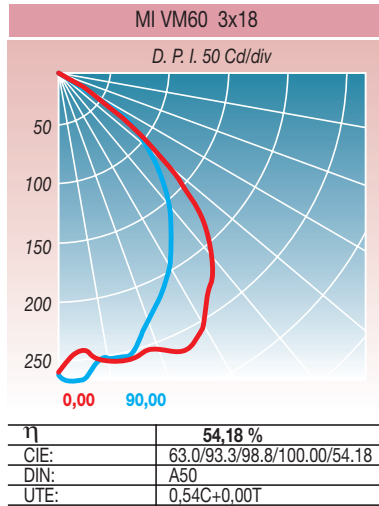

Carcasa
Chapa de acero pintada en blanco en calidad poliéster. Esquinas redondeadas.


Difusor
Aluminio mate anodizado alto rendimiento de alta pureza. Longitudinales y transversales en UVE. Baja luminancia. Muelles de seguridad.

Aplicación
Iluminación general de oficinas, despachos, tiendas, agencias de bancos, colegios y espacios públicos entre otros con uso intensivo del ordenador.

Housing
White polyester painted steel chassis.
Rounded corners.

Louver
Anodised matt aluminium very high purity.
Longitudinal and transverse sections are both V shaped. Low luminance. Safety springs.

Application
General lighting for offices, shops, banks, schools, public spaces and others. Ideal for computer use.

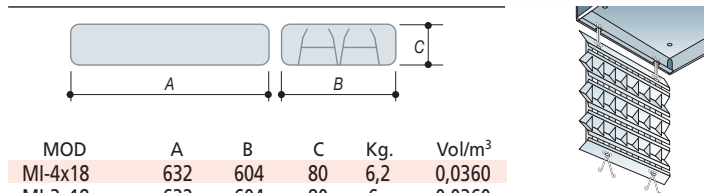

MOD	A	B	C	Kg.	Vol/m ³
MI-4x18	632	604	80	6,2	0,0360
MI-3x18	632	604	80	6	0,0360
MI-2x18	632	304	80	3,7	0,0190
MI-4x36	1.243	604	80	10	0,0704
MI-3x36	1.243	604	80	9,5	0,0704
MI-2x36	1.243	304	80	6,2	0,0368
MI-2x58	1.553	304	80	8	0,0450