



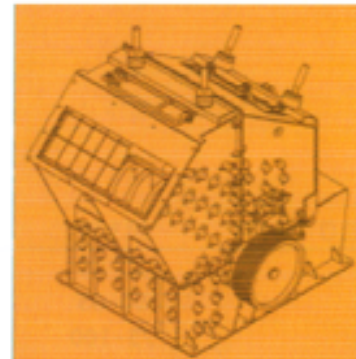

## MOLINOS SECUNDARIOS DE IMPACTO SZB SECONDARY IMPACT MILLS- SECONDAIRES À PERCUSSION

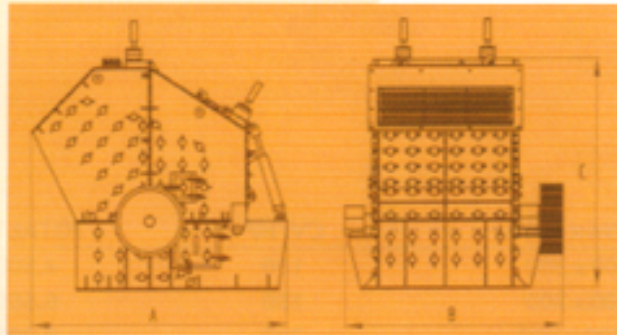

### CUADRO DE CARACTERÍSTICAS

MODELO	TM/H	CV/HP	BOCA M/M x M/M	TOTAL KG	A MM	B MM	C MM
SZB-3	40-80	75	380 x 500	3.000	1.600	1.500	1.500
SZB-4	80-100	125	380 x 700	6.800	2.180	2.000	2.000
SZB-5	100-150	180	380 x 1000	10.000	2.180	2.300	2.000
SZB-6	180-220	220	580 x 1000	13.000	3.000	2.300	2.600
SZBF-6	200-250	280	580 x 1200	15.000	3.000	2.500	2.600
SZB-7	250-350	340	580 x 1500	18.500	3.000	2.800	2.600
SZB-8	350-500	545	580 x 1800	25.000	3.000	3.100	2.600
SZB-9	550-800	800	650 x 2400	42.000	4.000	3.700	3.650



Impactores secundarios serie pesada SZB destacan por su robustez, gran coeficiente de reducción y óptima cubicidad. Indicados para tratamiento de materiales de abrasividad media.

