
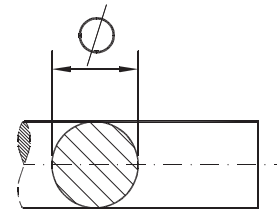


Semi-ejes rectos sin freno standard (velocidad 25/40 Km/h).

Standard straight semi-axes without brake (speed 25/40 Km/h).

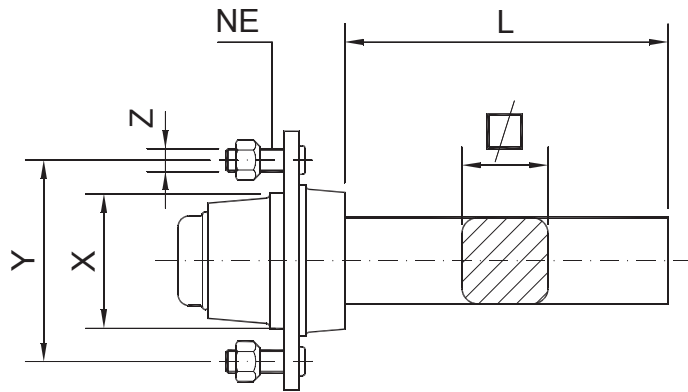

Mangón opcional
Optional round solid tube

Cód. Code	Referencia/Reference		Ataque Wheel fixing X x Y/NE-Z	Rodamientos Bearings	L	M.M.T.A. por semi-eje (Kg.) a 40 Km/h M.M.T.A. per semi-axle (Kg.) at 40 Km/h			Peso Aprox. Approx. weight (Kg.)
12132	RZ- 3025.000x000.05812	30	58 x 98 / 4-M12 Asiento esférico R12	30204/30205	200	425	350	300	3,4
12133	RZ- 3525.000x000.05812	35		3,8					
12134	RZ- 4030.000x000.09316	40	93 x 140 / 5-M16 Asiento esférico R14	30205/30206		750	650	525	6,4
12135	RZ- 4540.000x000.09316	45		30206/30208		1100	950	750	8,4
12136	RZ- 5045.000x000.09316	50		30206/30209		1350	1100	1000	9,4
12228	RZ- 5045.000x000.016018		12,6						
12231	RZ- 6055.000x000.016018	60	160 x 205/ 6-M18 Asiento esférico R16	30208/30211		2200	1900	1700	17
12157	RZ- 7065.000x000.016018	70		30210/30213		3000	2650	2250	21,4

NOTAS DE INTERÉS: / NOTES OF INTEREST:

* M.M.T.A.: Masa Máxima Técnicamente Admisible. / Technically Allowable Maximum Mass.

* Capacidad de carga a velocidad inferior 40Km/h.: Consultar pag 61. / Load capacity at a speed of less than 40 Km/h.: Consult page 61.

* NE: Número de tornillos (espárragos). / NE: Number of screws. (studs).