


Ruedas con llanta de base honda.

Wheels with deep base rim.

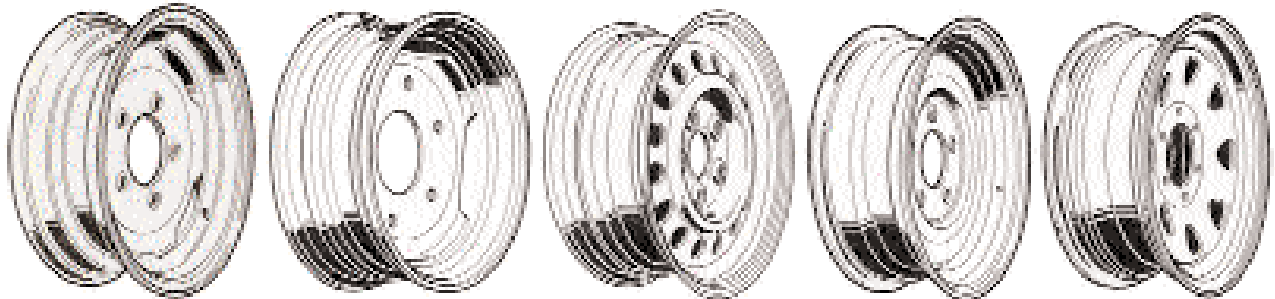

01

02

03

04

05

RUEDAS CON LLANTA DE BASE HONDE "BH" / WHEELS WITH "BH" DEEP BASE RIM.


COD.		Ref. de origen Original Ref.						Kg V= Km/h					
								25	30	40	> 40		
1959	3.50B x 10"	K 10 S 1100 S 1	05	04/58.5x98x15.5-E16	+5		5	680	650	570	400	3,38	
2134	3.00B x 12"	K 12 N 002	01	05/94x140x18.5-E1	0	2,5	3,5	630	600	530	-	3,5	
710		K 12 S 225										3,7	
5701	4.00B x 12"	K 12 S 1451				4							
717	4.25 x 12"	K 12 S 001				5,6							
720	7.00 x 12"	K 12 S 007				7,5							
1894	4J x 13"	K 13 N 002	03	04/58.5x98x15.5-E16	+30	2,5	3,5	630	600	530	450	5,1	
2136		K 13 S 1651 S 1										5,9	
1550		K 13 N 004										4,9	
1403	4 ^{1/2} J x 13"	K 13 S 1641 S 1	01	04/58.5x98x14-E16	+30		3,9	840	800	710	550	6,2	
14869	5J x 14" CAR	K 14 S 2850 S 1	04	05/94x140x18.5-E1	0	3	5	1450	1400	1200	850	8	
5321	5J x 14"	K 14 N 003						3,5	840	800	710	-	6
13777	5 ^{1/2} J x 14"	K 14 S 2060 S 1	03	04/58.5x98x15.5-E16	+30	2,5	3,9	940	900	800	650	8	
14256		K 14 S 2170 S 1						5	1050	1000	850	750	7,98
15950	6J x 14" CAR	K 14 S 2040 S 1	02	06/161x205x21.5-B2	-5	4	8	2350	2250	2000	1250	11,2	
11503	4J x 15"	K 15 N 002	01	05/94x140x18.5-E1	0	2,5	3,5	840	800	710	-	6	
14867	5J x 15" CAR	K 15 S 7380 S 1	04					5	2100	2000	1780	1100	9,3
14418	6J x 15"	K 15 N 0041	01					5	1260	1200	1070	-	9,5
18801		K 15 S 6750 S 1	03	06/100x139.7x15-E60 ^o	+25	3	6	1350	1300	1150	750	9,37	
6192	7J x 15"	K 15 N 005	01	05/94x140x18.5-E1	0	3	5	1260	1200	1070	-	9,5	
5694		K 15 N 006						5	1470	1400	1240	-	9
13354		8W x 15"						K 15 N 008	3,5	1780	1700	1510	-

NOTAS DE INTERES: / NOTES OF INTEREST:

* La carga indicada debe interpretarse aproximada y se considera siempre para vehículos remolcados. En el supuesto de incorporar ejes direccionales o motrices, consultar con nuestra O.T.
/ The load indicated is approximate and always refers to towed vehicles with non-steering axles. In the case of steering or driving axles, please consult our technical department.

Ruedas con llanta de base honda.

Wheels with deep base rim.

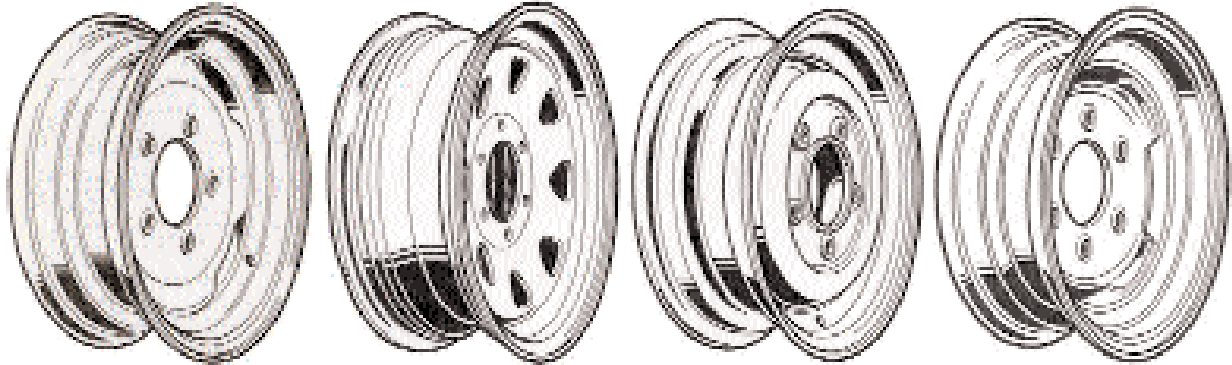

01

02

03

04

RUEDAS CON LLANTA DE BASE HONDE "BH" / WHEELS WITH "BH" DEEP BASE RIM.

COD.		Ref. de origen Original Ref.					Kg								
							V= Km/h								
							25	30	40	> 40					
11705	9.00 x 15.3"	K 15 S 138	04	05x94x140x18.5-E1		3,4	5	1510	1440	1280		12,8			
15183		K 15 S 183		06x161x205x21.5-E2		3,7	6	2940	2800	2490		12			
2312		K 15 N 011		06x161x205x21.5-A2		5	10	3510	3350	2980			18,8		
2920		K 15 S 218		06x161x205x27-A3									17,9		
729	4.00E x 16"	K16 N 001	01	05x94x140x18.5-E1	0	3	4	1050	1000	890		8,4			
70150	4.50E x 16"	K 16 N 002		06x161x205x21.5-A2				1200	1100	1000		8,2			
738		K 16 S 156		05x94x140x18.5-E1		3,5	6	1260	1200	1120		9,4			
744	5.50F x 16"	K 16 S 087		06x161x205x21.5-E2								5	5	1200	1140
746		K 16 S 314		06x161x205x21.5-E2		6	6	1570	1500	1330					
777		K 16 S 005		06x161x205x21.5-A2								8	8	1890	1800
11447		K 16 S 144				5	5	3150	3000	2670					
17040		K 16 S 4630 S 1		03		05x115.2x165.1x19-E80°	+46	3,5	5	1910		1820	1620	1000	12
17041	6J x 16"	K 16 S 4850 S 1		02		06x110x139.7x15-E60°	+30	4	8	2200		2100	1850	1200	18
2957	8W x 16"	K 16 S 027		01		06x161x205x21.5-A2	0	3,5	8	2310		2200	1960		15,1
768	11 x 18"	K 18 N 003	5		10					3560	3390	3000	-		26,6
6254		K 18 S 150	06x161x205x27-A3		3630					3460	3070	30			

NOTAS DE INTERES: / NOTES OF INTEREST:

* La carga indicada debe interpretarse aproximada y se considera siempre para vehículos remolcados. En el supuesto de incorporar ejes direccionales o motrices, consultar con nuestra O.T.
/ The load indicated is approximate and always refers to towed vehicles with non-steering axles. In the case of steering or driving axles, please consult our technical department.