



FC series of cameras

DATA SHEET

Monochrome series of cameras



- Aesthetic design
- Rugged & Compact design
- Wide variety of applications
- CS mount
- Dip switches for configuration
- Line lock with phase adjustment
- Automatic gain control
- Backlight compensation
- 1/3" IT CCD
- Main and low voltage options
- High & medium resolution options
- Operational with fixed, manual, DC drive and video drive lenses

The FC series of Ganz cameras have been designed to be aesthetically pleasing whilst be rugged and compact. They utilize the 1/3" interline transfer CCD providing high quality images in a wide variety of applications. The FC cameras can accept all types of lenses whether they are manual lenses in internal application using AES (auto electronic shutter) or using auto iris lenses, either DC or video iris, providing the connection for these from the same plug. Within the range there are both mains voltage and low voltage options, also within the voltage varieties are standard and high-resolution options. When on site there are features such as automatic gain control, back light compensation and phase synchronisation which allow the set up of the camera to be customised to suit the on site environment.

Range of camera models

FC-25C	Standard resolution, Low voltage
FC-30C	Standard resolution, Mains voltage
FCH-25C	High resolution, Low voltage
FCH-30C	High resolution, mains voltage

The FC series of cameras are designed to be both simple to install and versatile to suit almost all applications.





CBC (EUROPE) Ltd.
CCTV Electronics & Optical Division

REF: CBC UK
DATE: 02/01/2002
ISSUE: No. C001/1/E


FC series of cameras

DATA SHEET

Monochrome series of cameras

TECHNICAL SPECIFICATION

	FC-30C	FC-25C	FCH-30C	FCH-25C
TV System	CCIR system			
Lens mount	CS mount			
Scanning System	2:1 Interlace			
Image sensor	1/3 inches IT CCD inerline			
Effective elements (h)x(v)	500 x 582		752 x 582	
Video outputs	1.0Vp-p / 75Ω			
Resolution (horizontal)	380TVL		570TVL	
Min.Illuminance	Less than 0.09Lux(F1.2/50IRE)		Less than 0.18Lux(F1.2/50IRE)	
	Less than 0.04Lux(F0.8/50IRE)		Less than 0.08Lux(F0.8/50IRE)	
S/N ratio	More than 48dB			
γcharacteristic	0.45			
Sync.system	INT./L.L. (Manual switch)			
Iris control	Video/DD/EI			
Power supply	230Vac	24Vac/12Vdc	230Vac	24Vac/12Vdc
Power consumption	3.5W	3W	3.5W	3W
Operating conditions	- 10℃ ~ +50℃ relative humidity 80% max			
Storage conditions	- 20℃ ~ +50℃ relative humidity 80% max			
External dimensions	55(W) x 40(H) x 112.4(D)mm			
Weight	Less than 410g	Less than 280g	Less than 410g	Less than 280g
Input & Output	Video output : BNC			
Switches	Iris control Video / AES / DC, Sync System INT./L.L., BLC :ON/OFF			

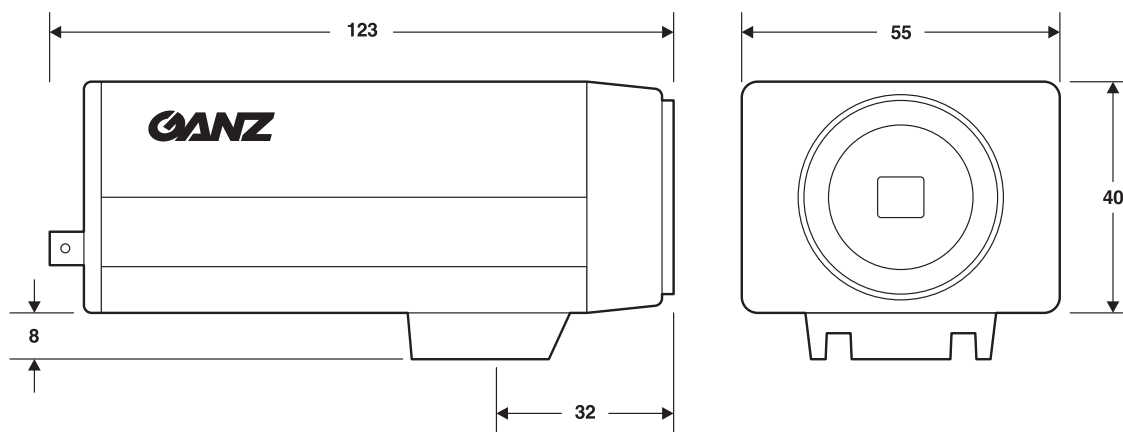

7/8 Garrick Industrial Centre Irving Way London NW9 6AQ England
tel: *technical support* +44 (0)20 8732 3350 +44 (0)20 8732 3332
fax: +44 (0)20 8202 3387 www.cbceurope.com