

SAMSUNG

TECHWIN

21" Color Monitor

SAM-21M

- Horizontal Resolution 450TV lines
- NTSC / PAL Selectable
- Three looping Video input (2 composite, 1 Y/C)
- Universal power Supply (100~240VAL, 50/60Hz)
- Metal Cabinet
- Built-in Speaker
- OSD Function



SAM-21M

SAM-21M

21" Color Monitor


- Horizontal Resolution 450TV lines
- NTSC/PAL Selectable
- Three looping Video input (2 composite, 1 Y/C)
- Universal power Supply (100~240VAL, 50/60Hz)
- Metal Cabinet ● Built-in Speaker
- OSD Function ● Approval:UL, FCC, CE, CSA, DHHS



Specifications

Model	SAM-21M	
GENERAL	Color System	NTSC / PAL
	Power Source	90~260VAC,50/60Hz
	Power Consumption	72W
	Picture tube	21" Line Gun,Semi Tinted CRT
	Video Impedence	75Ω BNC
	Speaker	70 x 40mm, 3W 80hm
	Operating temperature	0°C~40°C
	Operating humidity	35 %-80%
	Dimension(W x H x D)	476(W) x 432(H) x 468(D)
	Weight	About 26.8Kg
	Enclosure	Metal
VIDEO	Resolution	450TV Lines(at center)
	Input Level	1.0 ± 0.2Vp-p,75Ω
AUDIO	Output Level	1.0 ± 0.2Vp-p,75Ω
	Input Level	RCA Jack Type 300 ± 50mVrms
	Sound Distortion	Less than 10%
	HUM	Less than 10m Vrms
Control & Switch	BUZZ	Less than 200m Vp-p
	Control Front	Rotary Volume:Tint(NTSC System only)
		Brightness, Contrast, Color, Volume(Speaker)
		Push Button : Power On/Off
		MIC & Speaker : One-Way Audio
JACK & Terminal	Jacks Rear	5 BNC:Video Input/output 4 Audio RCA : Input/output

Dimension

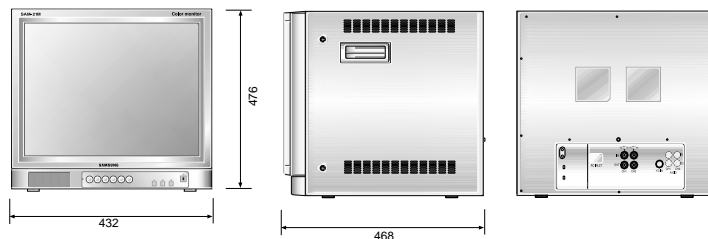

www.samsungcctv.co.kr

Design and specifications are subject to change without notice.



TECHWIN

SAMSUNG TECHWIN CO., LTD
145-3 Sangdaewon 1-Dong, Jungwon-Gu,
Sungnam, Kyungki-Do, Korea 462-121
TEL:82-31-740-8137-8141 FAX:82-31-740-8145

SAMSUNG OPTO-ELECTRONICS AMERICA, INC.
ELECTRONIC IMAGING DIV.
40 Seaview Drive, Secaucus N.J. 07094, U.S.A
TEL:201-902-0347 FAX:201-902-9342

SAMSUNG TECHWIN CO., LTD
SÃO PAULO OFFICE
Rua Professor Manoelito de Ornellas 303 2 - andar
Chacara Santo Antônio CEP : 04719-040
SÃO PAULO SP Brasil
TEL:55-11-3731-8270 FAX:55-11-3735-7616

DISTRIBUTED BY

