

Colour Monitor



TM-A140PN 14"

PAL/NTSC



TM-A140PN

- 320 Horizontal TV lines picture from 14 inch CRT
- Vertical Stripe phosphors
- PAL/NTSC auto selection
- Built-in speaker
- User-friendly on-screen display menu
- Control lock
- Optional RK-A14E rack mount
- Rugged metal case

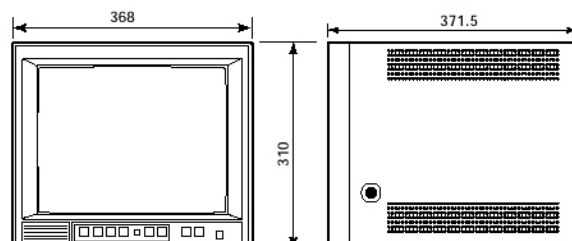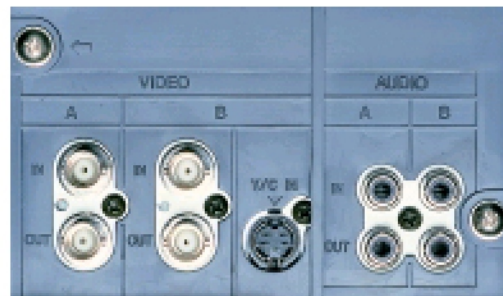

Specifications

General	TM-A10E	TM-A14PN	TM-A140PN
CRT	10" (25cm) measured diagonally 90 degrees deflection In-line guns 0.50mm vertical stripe pitch	14" measured diagonally Inline guns 0.65mm vertical stripe pitch	←
Scanning frequency	H:15.625 kHz, V:50 Hz	H:15.625 kHz, V:50 Hz PAL H:15.75 kHz, V:60 Hz NTSC	←
Power requirement	230V AC, 50 Hz	230V AC, 50/60 Hz	←
Power consumption	0.33A (max)	0.5A (max)	0.55A (max)
Audio outputs	1W	←	←
Speaker	yes	←	←
Horizontal resolution	More than 300 TV lines	320 TV lines	←
Colour temperature	6,500 degrees K	←	←
Composite video input	BNC x2 (for bridged output) 1.0V (p-p) 75 ohms, negative sync, termination switch provided	A/B each: BNCx2 (for bridged output) 1.0V (p-p) 75 ohms, negative sync, auto termination	←
Y/C video input	-na	Din 4-Pin Y: 1.0 V(p-p), 75 ohms, negative sync C: 0.3 V(p-p) 75 ohms (PAL) C: 0.286 V(p-p), 75 ohms (NTSC) Auto termination	←
Audio input / output	RCA x2 (for bridged output)	A/B each: RCA x2 (for bridged output)	←
Wired Remote Terminal	-na	RCA x2 (for bridged output)	←
Power cord	(TM-A10E)Continental type (TM-A10EK)UK mains lead type	(TM-A14PN)Continental type (TM-A14PN-K)UK mains lead type	(TM-A140PN)Continental type (TM-A140PN-K)UK mains lead type
Weight	6.9 kg	9.5 kg	12.2 kg
Dimensions	222x227x315mm (WxHxD)	368x310x371.5mm (WxHxD)	346x310x368.5mm (WxHxD)