



S700V & S702V

Product Specification

Description: Video Transmission System

Features

- ✓ One- or two-channel versions
- ✓ OAGC circuitry
- ✓ Works with all cameras
- ✓ Transmits up to 3.2 mi (5.2 km)
- ✓ Standalone or rack modules
- ✓ Dual-channel rack modules
- ✓ Forever Warranty™

Description

Fiber Options' S700V Series Video system is designed to transmit one or two channels of baseband composite video up to 3.2 miles (5.2 km). It provides superior performance and reliability at an economical price. The S700V is available in three versions: (1) compact standalone modules providing one video channel on one fiber, (2) rack-mounted cards providing one video channel on one fiber, and (3) rack-mounted cards that support two video channels on two fibers. The S700V Series meets the challenge for a low cost, high performance fiber optic video transmission system. The S700V and S702V model series are compatible with models in the 110V and 110V2 model series.

Basic Model Descriptions

S700V Transmits one channel of video over one multimode fiber

S702V Transmits two channels of video over two multimode fibers

For a complete list of available models, please refer to Table 1.

www.fiberoptions.com

Fiber Options 80 Orville Drive, Bohemia NY 11716-2533

US Tel: 631-567-8320 or 800-342-3748

UK Tel: +44 113 238 1668

Australia Tel: +61 3 9370 9192 **Fax:** +61 3 9370 9936

info@fiberoptions.com

Fax: 877-FiberFax (877-342-3732 toll free) or 631-567-8322

Fax: +44 113 253 8121

Hong Kong Tel: +852 2907 8108 **Fax:** +852 2142 5063

SERIES S700V & S702V

TECHNICAL INFORMATION

ELECTRICAL

Input Voltage:		Power Consumption	
Standalone Modules	12-16 VAC	@ 14 V:	1.4 W
	12-16 VDC	Heat Equivalent**:	0.08 btu/min (0.02 cal/min)
Rack Units	13.5 - 16 VDC		
Current Requirement:	35 mA		
Rack Module Power Factor:	1*		
Input Power Frequency:	50/60 Hz or DC		

*For an explanation of the Power Factor, please see the product specification for the 515R or 517R racks or the Fiber Finder.

**This represents the conversion of all input power to heat. The actual heat generated will be less.

VIDEO SIGNAL

Number of Channels:		Signal-to-Noise Ratio:	> 50 dB @ maximum optical attenuation
S700V:	1	Video Bandwidth:	8 MHz \pm 1 dB
S702V:	2	Frequency Response:	15 MHz
Standards Supported:	EIA, CCIR, NTSC, PAL	Video Resolution:	> 640 TV lines
Video Input Signal:	1.0 V p-p composite	Differential Phase:	< 1.7°
Input/Output Impedance:	75 Ω	Tilt:	< 1.6%
Video Output Signal:	1.0 V p-p composite		
Output Gain:	Unity		

VIDEO INTERCONNECTION

Recommended Maximum Distances		Recommended Cable	
Video Equip to Tx:	≤ 100 ft (30 m)	Type:	RG59/U coaxial cable (Belden No. 9259 or equivalent)
Rx to Video Equip:	≤ 100 ft (30 m)		

AGENCY COMPLIANCE

Emissions:	FCC Part 15, ICES-003, AS/NZS 3548, EN55022	Safety:	UL1950, CAN/CSA 22.2, NO.950-95
Immunity:	ENVS0204 EN61000-4-2, 3, 4, 5, 6, 11		

FCC PART 15
COMPLIANT



SERIES S700V & S702V

TECHNICAL INFORMATION

OPTICAL

Wavelength:	850 nm	Modulation Type:	Intensity modulation
Optical Mode:	Multimode	Gain Control:	Optical automatic (OAGC)
Signal Direction:	Tx → Rx	Transmitter Launch Power:	-15 dBm
Optical Budget:	13 dB	Receiver Sensitivity:	-28 dBm
Operating Distance*:	3.2 mi (5.2. km)		
Emitter Type:	LED		
Fiber Type:	62.5 μm		

*Operating distance is approximate and assumes best fiber. It will be affected by the type and number of splices in the fiber.

CONNECTORS

Signal Input/Output:	
Optical:	ST type
Video:	BNC
Power Input:	3-pin screw terminal


OPTIONS

Power Supply:	Model 610P (AC)
---------------	-----------------

INDICATORS

Receiver:		Transmitter:	
Standalone	Level/Loss™		None
Rack	Level/Loss™		

FIGURE 1: SYSTEM DIAGRAMS*

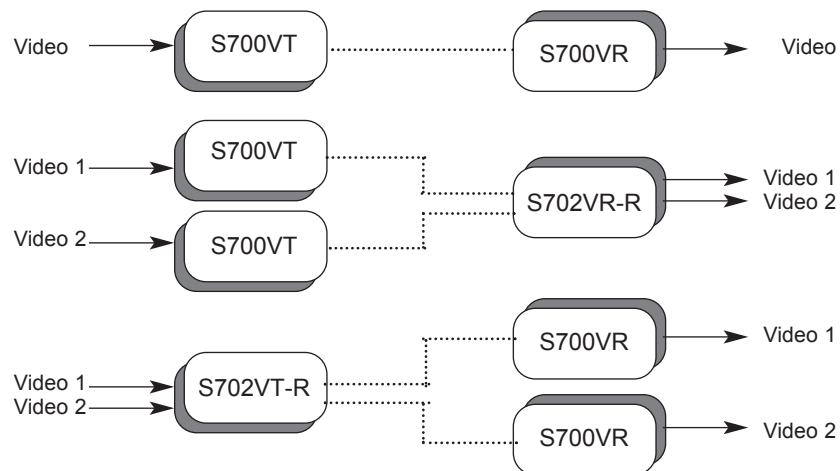

* Not shown above: A single S702VT-R transmitter may also be used to interface with a single S702VR-R receiver.

SERIES S700V & S702V

TECHNICAL INFORMATION

ENVIRONMENTAL

Temperature Range in Operation:	-40° to +167° F (-40° to +75° C)	Humidity Range in Operation:	0 - 95% relative, noncondensing
Temperature Range in Storage:	-40° to +185° F (-40° to +85° C)	Humidity Range in Storage:	0 - 95% relative, noncondensing

MECHANICAL

Standalone Modules

Dimensions:	Length: 5.0 in (127 mm) Width: 2.62 in (67 mm) Height: 1.54 in (39 mm)
Weight:	10.7 oz (0.31 kg)
Construction:	Steel
Finish:	Grey textured paint
Mounting Method:	4 - No. 6 (3 mm) screws

Rack Modules

Module Width:	1 slot, 1.0 in (25.4 mm)
Weight:	S700VT-R: 0.49 lb (0.22 kg) S702VT-R: 0.61 lb (0.28 kg)
Construction:	Aluminum
Finish:	Black semigloss paint


TABLE 1: MODEL VARIATIONS

Model Number	Function	Enclosure Type*	Fiber Size	No. of Fibers	Max. Atten.	Wave-length	Power Supply Model
Standalone Modules							
S700VT	Transmitter	4 X 2 X 1	62.5	1	13 dB	850	610P
S700VR	Receiver	4 X 2 X 1	62.5	1	13 dB	850	610P
S702VT	Transmitter	4 X 2 X 1	62.5	2	13 dB	850	610P
Rack-Mount Modules							
S700VT-R	Transmitter	515R1, 517R1	62.5	1	13 dB	850	powered by rack
S700VR-R	Receiver	515R1, 517R1	62.5	1	13 dB	850	powered by rack
S702VT-R	Transmitter	515R1, 517R1	62.5	2	13 dB	850	powered by rack
S702VR-R	Receiver	515R1, 517R1	62.5	2	13 dB	850	powered by rack


*For exact dimensions, see the MECHANICAL section.

SERIES S700V & S702V
TECHNICAL INFORMATION

FIGURE 2: S700V STANDALONE MODULES

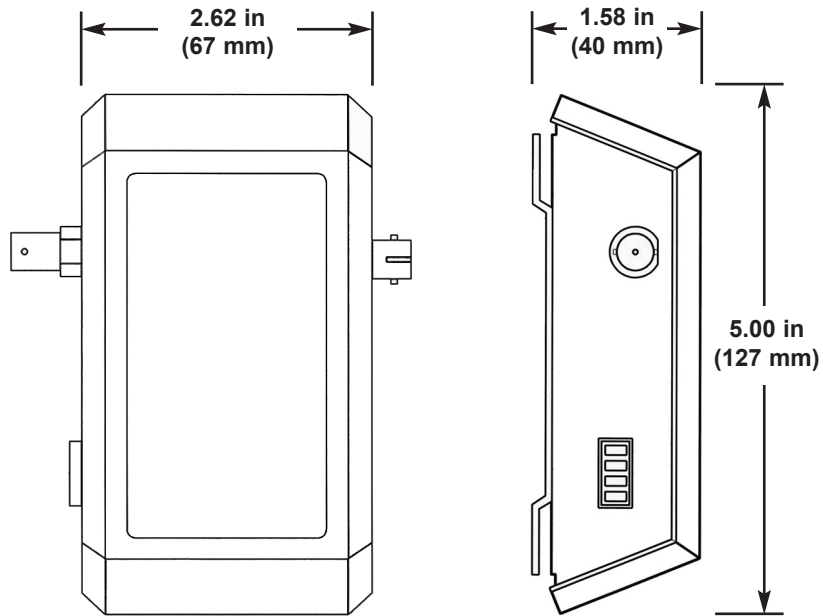

**FIGURE 3: S700V STANDALONE MODULE
REMOVABLE MOUNTING PLATE**

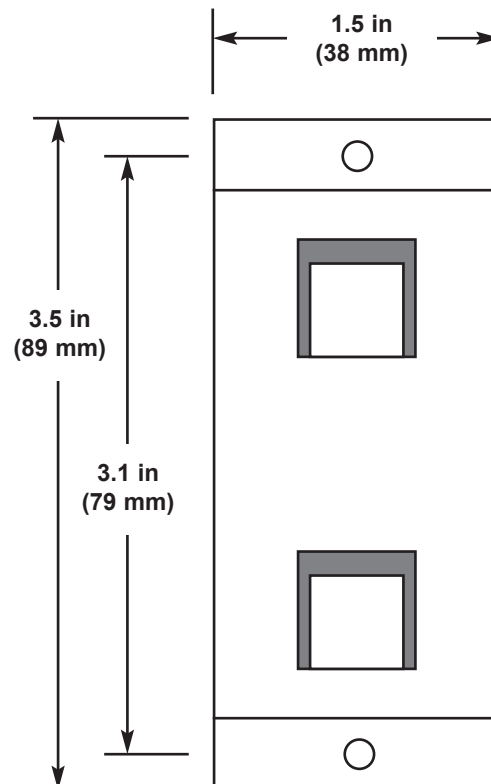

S700V & S702V

Product Specification

THE FOREVER WARRANTY

Fiber Options warrants that, at the time of shipment, the products manufactured by Fiber Options will be free from defects in material and workmanship. Should any defects appear in the product, Fiber Options shall repair or replace the product or supply an equivalent, at its sole discretion. A Return Authorization (RA) number is required to send the unit back in case return is necessary. Return shipments to Fiber Options shall be at the buyer's expense. Fiber Options will return said equipment prepaid via best way.

THIS WARRANTY IS THE SOLE WARRANTY OF FIBER OPTIONS WITH RESPECT TO THE PRODUCT AND IS IN LIEU OF AND EXCLUDES ANY AND ALL OTHER EXPRESSED OR IMPLIED WARRANTIES INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PURPOSE. THIS WARRANTY IS THE SOLE REMEDY AVAILABLE FOR ANY CLAIM BASED ON AN ALLEGED DEFECT IN MATERIAL OR WORKMANSHIP WHETHER SUCH CLAIM ARISES IN CONTRACT, NEGLIGENCE, STRICT LIABILITY OR OTHERWISE. FIBER OPTIONS SHALL NOT BE LIABLE IN ANY WAY FOR ANY CONSEQUENTIAL DAMAGE RESULTING FROM ANY DEFECT COVERED BY THIS WARRANTY.

Copyright 2000 by FIBER OPTIONS.

All rights reserved.

12-0700-010406

All specifications are subject to change without notice. Information furnished by FIBER OPTIONS is believed to be accurate and reliable. However, no responsibility or liability is assumed by FIBER OPTIONS for its use, nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or other rights of FIBER OPTIONS.

www.fiberoptions.com

Fiber Options 80 Orville Drive, Bohemia NY 11716-2533

US Tel: 631-567-8320 or 800-342-3748

UK Tel: +44 113 238 1668

Australia Tel: +61 3 9370 9192 **Fax:** +61 3 9370 9936

Fax: 877-FiberFax (877-342-3732 toll free) or 631-567-8322

Fax: +44 113 253 8121

Hong Kong Tel: +852 2907 8108 **Fax:** +852 2142 5063

info@fiberoptions.com