




SE PUEDE ADAPTAR:



GIRO CONTROLADO
CON MOTOR
HIDRÁULICO

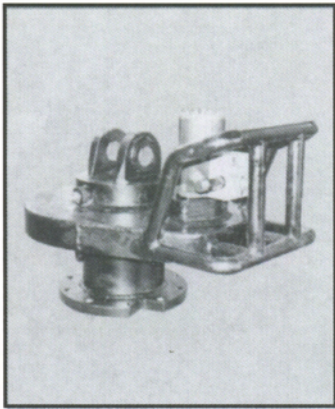

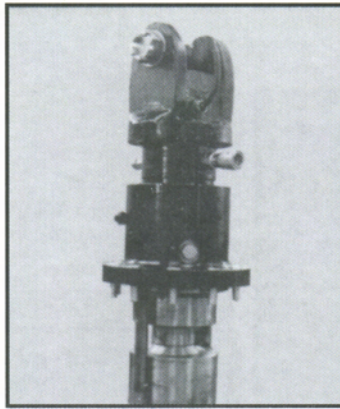

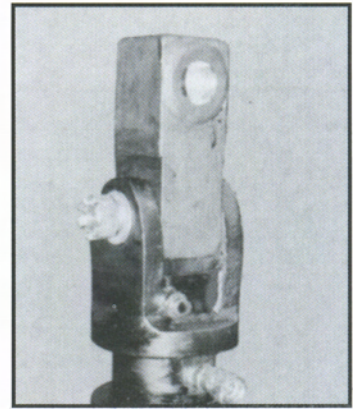




GIRO
LOCO
CON COLECTOR



DADO DE
ACOPLE

CARACTERÍSTICAS • TECHNISCHE DATEN • SCRAP HANDLER • CARACTERISTIQUES

												
						Ø A	Ø B	C	D	Ø E	Ø F	G
PHEG 1-4000- 220-820	500	350	4/5	1.600	1.800	2.400	1.400	1.100	2.300	45	820	

1-400-	500	500	75	1.000	1.000	2.100	1.100	2.000	75	500		
220-820												

NOTA: SE PUEDE FABRICAR CON 6 GARRAS