




Luminaria modelo DINAMIC LINEA CONTINUA para suspender o adosar a techo con difusor de policarbonato opal. Fabricada en aluminio extrusionado, anodizado mate, para radiación directa o directa-indirecta. Para lámparas T5-HO. Tapas finales no incluidas para optimizar la instalación en líneas continuas.

DINAMIC CONTINUOUS LINE luminaire for suspended or ceiling mounting, with opal polycarbonate diffuser. Manufactured in matt anodised extruded aluminium, these are suitable for direct or direct-indirect lighting. For T5-HO lamps. In order to facilitate installation in continuous lines, end covers are not included.





Luminaria DINAMIC L.C. con difusor de policarbonato opal
DINAMIC L.C. luminaire with opal polycarbonate diffuser



Lamp	Equipo / Gear	Ref	Color	W	Plum	L x A x H mm
------	---------------	-----	-------	---	------	--------------



	Electrónico T5 HO	64.42.06.0		2 x 54	118 W	1245 x 212 x 57,5
	Electronic T5 HO	64.42.08.0		2 x 80	172 W	1545 x 212 x 57,5

Radiación directa
Direct Luminaire

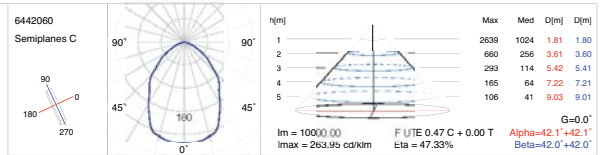

	Electrónico T5 HO	64.42.07.0		2 x 54	118 W	1245 x 212 x 57,5
	Electronic T5 HO	64.42.09.0		2 x 80	172 W	1545 x 212 x 57,5

Radiación directa-indirecta
Direct-indirect Luminaire

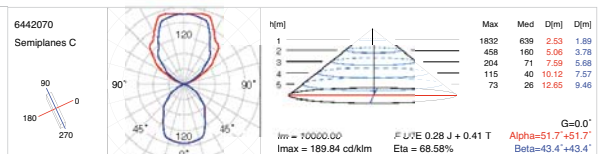




	Referencias regulables p.481 Dimable references p.481		Sistemas de control 1-10V p.456 Systems of control 1-10V p.456
--	--	--	---





Difusor superior de policarbonato transparente incluido
Transparent polycarbonate upper diffuser included



Accesorios generales para la instalación de la luminaria modelo DINAMIC L.C.
 General accessories for DINAMIC L.C. luminaire installations

Detalle / Detail	Ref.	Color
 <p>Tapa final End cover</p>	64.06.40.3	<input type="checkbox"/>
 <p>Unión codo 90° 90° elbow joint</p>	64.05.20.3	<input type="checkbox"/>
 <p>Fijación intermedia Intermediate joint</p> <p>2 unit./ ref.</p>	64.07.00.0	

Suspensiones para sistemas aéreos
 Suspensions for suspended systems

Detalle / Detail	Ref.	Color	hmm
 <p>Cable de acero regulable niquelado Nickel steel cable height- adjustable</p> <p>1 unit./ ref. 4 unit./ lum.</p>	96.01.31.3	<input checked="" type="checkbox"/>	1000
	96.01.34.3	<input checked="" type="checkbox"/>	4000
 <p>Cable de acero regulable en "Y" Steel cable height- adjustable in "Y"</p>	96.08.65.3	<input checked="" type="checkbox"/>	max. 3m
 <p>Suspensión electromecánica regulable en "Y" Electromagnetical suspension height-adjustable in "Y"</p>	96.28.65.3	<input checked="" type="checkbox"/>	max. 3m
	96.28.65.0	<input type="checkbox"/>	
 <p>Cable de acero (3xØ1,5) regulable para conexión electromecánica Steel cable (3xØ1,5) height-adjustable for electromechanical connection</p>	96.21.31.0	<input type="checkbox"/>	1000
	96.21.34.0	<input type="checkbox"/>	4000

