




Luminaria modelo DINAMIC SHOW para suspender o adosar con difusor de policarbonato opal para iluminación directa. Equipada con regulación de color continuo, combinando 3 colores (rojo, verde y azul). Disponible en 2 modelos: "máster" y "esclava". Para 6 lámparas fluorescentes T5 de 28 o 14W.

DINAMIC SHOW luminaire for suspended or surface mounting, with opal polycarbonate diffuser for direct lighting. Equipped for continuous colour adjustment, by combining 3 colours (red, green and blue). Available in 2 models: "master" and "slave". For 6 T5 28W or 14W fluorescent lamps.

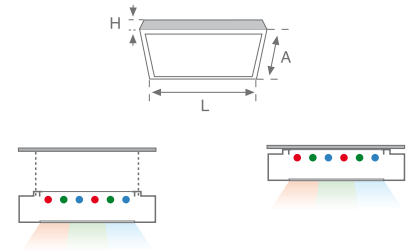

Luminaria DINAMIC SHOW con regulación de color continua y difusor de policarbonato opal  
 DINAMIC SHOW luminaire with continuous colours changing and opal polycarbonate diffuser



Lamp	Equipo / Gear	Ref	Color	W	Plum	L x A x H mm
	Electrónico T5 HO	64.46.01.0	<input type="checkbox"/>	6 x 14	96,6 W	650 x 650 x 57
	Electronic T5 HO	64.46.00.0	<input type="checkbox"/>	6 x 28	193,2 W	1250 x 650 x 57

Con controlador (master)  
 With controller (master)

	Electrónico T5 HO	64.46.03.0	<input type="checkbox"/>	6 x 14	96,6 W	650 x 650 x 57
	Electronic T5 HO	64.46.02.0	<input type="checkbox"/>	6 x 28	193,2 W	1250 x 650 x 57

Sin controlador (esclava)  
 Without controller (slave)

Una luminaria "con controlador" puede regular hasta 8 luminarias "sin controlador"  
 A luminaire "with controller" can regulate up to 8 luminaires "without controller"

Suspensiones  
 Suspensions

Detalle / Detail	Ref	Color	Detalle / Detail	Ref	Color
	Cable de acero (3xØ1,5)	96.21.31.0		Cable de acero regulable	96.01.31.0
	regulable para conexión electromecánica	96.21.34.0		Height-adjustable steel cable suspension	96.01.34.0
Steel cable (3xØ1,5) height-adjustable for electromechanical connection		Anclaje rápido Quick bracket			Anclaje rápido Quick bracket
1unit/ref.					