




Luminaria FLAT con reflector de aluminio brillante de elevada pureza. Fabricado en extrusión de aluminio y lacado en color blanco mate. Para lámparas fluorescentes T5-HO. El modelo FLAT SHOW, con lámparas RGB y equipos digitales DALI, es programable por el usuario mediante el software PACK DE CONTROL y permite crear escenas dinámicas de colores.

FLAT luminaire with polished high purity aluminium reflector. Manufactured in extruded aluminium, and lacquered in matt white. For T5-HO fluorescent lamps.


The FLAT SHOW model, with RGB lamps and DALI digital control gear, can be programmed by the user through the CONTROL PACK software and thus create dynamic colour settings.

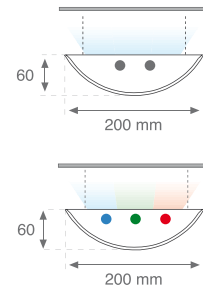

Luminaria FLAT de radiación indirecta
FLAT luminaire of indirect radiation



Lamp	Equipo / Gear	Ref	Color	W	Plum	Lmm
	Electrónico T5 HO Electronic T5 HO	72.42.01.0 72.42.02.0	<input type="checkbox"/>	2x54 2x80	118W 172W	1230 1530

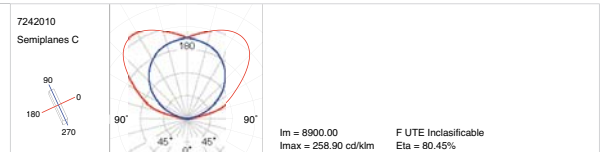

Aplique FLAT SHOW de radiación indirecta
FLAT SHOW wall mounted luminaire of indirect radiation










Lamp	Equipo / Gear	Ref	Color	W	Plum	Lmm
	Electrónico T5 HO Electronic T5 HO	72.83.01.0	<input type="checkbox"/>	3 x 28	96.6W	1230 RGB




Pack de control 96.86.01.0
Control pack

Más información p. 378
More information p. 378


Accesorios
Accessories

Detalle / Detail	Ref	Color	Detalle / Detail	Ref	Color
 125mm Tapa final End cover	72.06.40.0	<input type="checkbox"/>	 Perfil Profile max. 3m	72.05.00.0	<input type="checkbox"/>
 Unión codo 90° 90° elbow joint	72.05.20.0	<input type="checkbox"/>	 Juego de 2 fijaciones para unión Set of 2 fixings per joint 2 unit./ref.	96.06.01.0	
 Unión de 2 luminaris a 90° Joining piece coupler to 90° 1 unit./ref.	72.05.24.0	<input type="checkbox"/>	 Unión de 3 luminaris a 90° Joining piece coupler to 90° 1 unit./ref.	72.05.25.0	<input type="checkbox"/>
 Unión de 4 luminaris a 90° Joining piece coupler to 90° 1 unit./ref.	72.05.26.0	<input type="checkbox"/>			


1 ref. 72.05.24.0




2 ref. 72.05.24.0




4 ref. 72.05.24.0







1 ref. 72.05.25.0



1 ref. 72.05.26.0



Suspensiones para sistemas aéreos
Suspensions for suspended systems

Detalle / Detail	Ref.	Color
 Dos cables acero trenzado Two braided steel cables Altura regulable (max.3m.) Adjustable height (max.3m.)	96.07.49.3 96.07.49.0	<input type="checkbox"/> <input type="checkbox"/>
 Suspensión electromecánica de dos cables acero trenzado Electromechanical suspension of two braided steel cables Altura regulable (max.3m.) Adjustable height (max.3m.)	96.27.49.3 96.27.49.0 (3x1,5mm)	<input type="checkbox"/> <input type="checkbox"/>
 Cable de acero regulable en "Y" Steel cable height- adjustable in "Y" Altura regulable (max.3m.) Adjustable height (max.3m.)	96.08.60.3	<input checked="" type="checkbox"/>
 Suspensión electromecánica regulable en "Y" Electromechanical suspension height-adjustable in "Y" Altura regulable (max.3m.) Adjustable height (max.3m.)	96.28.60.0	<input type="checkbox"/>