


Luminaria FLAT de radiación directa-indirecta combina la fluorescencia para luz ambiente con las halógenas QR-70 para la luz directa de acento. Fabricado en extrusión de aluminio y lacado en color blanco mate, con reflector de aluminio brillante de elevada pureza. Para lámparas fluorescentes T5-HO.

FLAT luminaire for direct-indirect lighting combines fluorescent lamps for ambient lighting with QR-70 halogen lamps for direct accent lighting. Manufactured in extruded aluminium lacquered in matt white, with a reflector made of polished high purity aluminium. For T5-HO fluorescent lamps.



Luminaria FLAT de radiación indirecta / directa  
FLAT luminaire of indirect / direct radiation

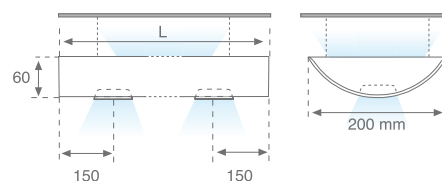








Lamp	Equipo / Gear	Ref	Color	W	Plum	Lmm
	Electrónico T5 HO + QR-70	72.44.24.0	<input type="checkbox"/>	2x54 + 2x50	218	1530
	Electronic T5 HO + QR-70	72.44.25.0	<input type="checkbox"/>	2x80 + 2x50	272	1830

1-10V Referencias regulables p.481  
Dimable references p.481


Sistemas de control 1-10V p.456  
Systems of control 1-10V p.456




Accesorios  
Accessories

Detalle / Detail	Ref	Color	Detalle / Detail	Ref	Color
 125mm Tapa final End cover	72.06.40.0	<input type="checkbox"/>	 Perfil Profile  max. 3m	72.05.00.0	<input type="checkbox"/>
 Unión codo 90° 90° elbow joint	72.05.20.0	<input type="checkbox"/>	 Juego de 2 fijaciones para unión Set of 2 fixings per joint  2 unit./ref.	96.06.01.0	<input type="checkbox"/>
 Unión de 2 luminaris a 90° Joining piece coupler to 90°  1 unit./ref.	72.05.24.0	<input type="checkbox"/>	 Unión de 3 luminaris a 90° Joining piece coupler to 90°  1 unit./ref.	72.05.25.0	<input type="checkbox"/>
 Unión de 4 luminaris a 90° Joining piece coupler to 90°  1 unit./ref.	72.05.26.0	<input type="checkbox"/>			


1 ref. 72.05.24.0




2 ref. 72.05.24.0




4 ref. 72.05.24.0







1 ref. 72.05.25.0



1 ref. 72.05.26.0



Suspensiones para sistemas aéreos  
Suspensions for suspended systems

Detalle / Detail	Ref.	Color
 Dos cables acero trenzado Two braided steel cables  Altura regulable (max.3m.) Adjustable height (max.3m.)	96.07.49.3 96.07.49.0	<input type="checkbox"/> <input type="checkbox"/>
 Suspensión electromecánica de dos cables acero trenzado Electromechanical suspension of two braided steel cables  Altura regulable (max.3m.) Adjustable height (max.3m.)	96.27.49.3 96.27.49.0  (3x1,5mm)	<input type="checkbox"/> <input type="checkbox"/>
 Cable de acero regulable en "Y" Steel cable height- adjustable in "Y"  Altura regulable (max.3m.) Adjustable height (max.3m.)	96.08.60.3	<input checked="" type="checkbox"/>
 Suspensión electromecánica regulable en "Y" Electromechanical suspension height-adjustable in "Y"  Altura regulable (max.3m.) Adjustable height (max.3m.)	96.28.60.0	<input type="checkbox"/>