



Luminaria de empotrar a suelo modelo UPLIGHT IP67 diámetro exterior 283 mm con óptica fija y IK10. Está compuesta por un cuerpo de aluminio pintado en poliéster color negro texturizado, una hornacina de polímero, un cristal templado y ópticas de aluminio de alta pureza.

Tiene un modelo de fluorescencia con un equipo multipotencia para 26, 32 y 42W.

Como accesorios técnicos, dispone de cristales con diferentes acabados, filtros de colores, aro embellecedor, rejilla antideslumbrante y un kit para zona accesible.

Floor-embedded UPLIGHT IP67 model with external diameter of 283 mm and fixed optics and IK10. This model consists of an aluminium body painted in textured black polyester, a polymer niche, tempered glass and high quality aluminium optics.

It has a fluorescent tube model with a multi-power unit for 26, 32 and 42W.


As technical accessories, there are glass protectors with different finishes, colour filters, upper trim rings, glare-reducing grilles and a kit for accessible areas.

Uplight exterior fijo IP67



Non directional fixed buried uplight IP67



Lamp	Equipo / Gear	Ref	Color	W	PLum	Tª cristal	*TªKit	∠
	Electromagnético	93.01.30.3	■	1x26	45W	58°C	37°C	114°
	Electromagnetic			/ 32		70°C	52°C	
				/ 42		101°C	68°C	

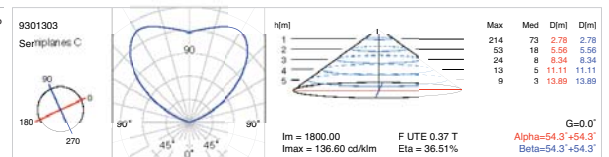



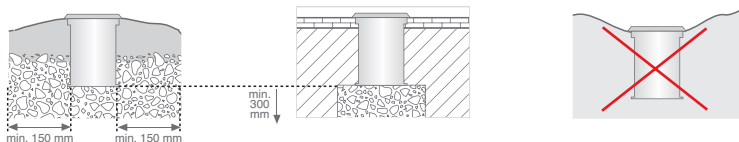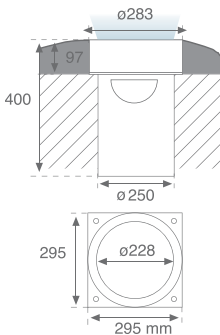





Caja de empotramiento incluida
Recessing box included



Se recomienda una capa de grava, alrededor de la caja del uplight, para un drenaje correcto. Evite su colocación en depresiones del terreno.

It is recommended a crushed stone surrounding all around the uplight box for a correct drainage. Avoid its placing in ground depression.

Accesorios IP67
Accessories IP67

Detalle / Detail	Ref	Detalle / Detail	Ref
 <p>Rejilla Antideslumbrante Anti-glare louvre</p>	93.06.15.0	 <p>Aro embellecedor INOX Flange stainless</p> <p>INOX AISI 304</p> <p>Para ambientes salinos se recomienda INOX AISI 316 For saline ambient it is recommended INOX AISI 316</p>	93.06.11.3
 <p>Cristal Media Luna Semi-opal glass</p>	93.06.14.0	 <p>Cristal Opal Opal glass</p>	93.06.13.0
 <p>Anti-deslizante Nonskid</p>	93.06.12.0	 <p>*KIT Zona accesible KIT accessible Zone</p> <p>No compatible con 150W Noncompatible with 150W</p>	93.06.10.0
 <p>Conector de tres polos IP 67 Connector of three poles IP 67</p>	96.00.10.0	 <p>Filtros de color Color filters</p>	<p>93.06.21.8 ■</p> <p>93.06.21.5 ■</p> <p>93.06.21.6 ■</p> <p>93.06.21.7 ■</p>

