




UPLIGHT IP65 diámetro exterior 260 mm con óptica orientable e IK08. Está compuesto por un cuerpo de acero pintado en poliéster color gris texturizado, una hornacina de polímero, un cristal templado y ópticas de aluminio de alta pureza. Existen modelos de descarga de 70 y 150W, y un modelo con lámpara directa a red. Como accesorio, dispone de una tapa superior para proyección radial.


Floor-embedded UPLIGHT IP65 model with external diameter of 260 mm and adjustable optics e IK08. This model consists of a steel body painted in textured black polyester, a polymer niche, tempered glass and high quality aluminium optics. There are discharge models of 70 and 150W, and a direct to grid model. The available accessory is a top cover for radial light projection.



Uplight exterior orientable
Directional buried uplight



Lamp	Equipo / Gear	Ref	Color	W	PLum	Tª cristal	△°
	Electromagnético	93.01.02.3	<input checked="" type="checkbox"/>	70	87,4W	150°C	90°
	Electromagnetic	93.01.03.3	<input checked="" type="checkbox"/>	150	179,4W	160°C	90°

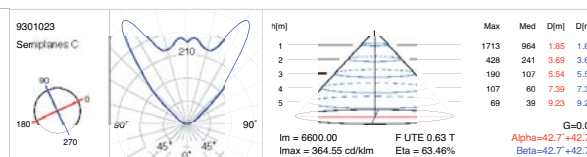

No orientable
No directional


	Directo a red Mains Supply	93.01.04.3	<input checked="" type="checkbox"/>	250	250W	170°C	105°
--	-------------------------------	------------	-------------------------------------	-----	------	-------	------

Caja de empotramiento incluida
Recessing box included

Para ambientes salinos se recomienda INOX AISI 316
For saline ambient it is recommended INOX AISI 316

Accesorios
Accessories

Detalle / Detail	Ref	Color
<p>Tapa para uplight exterior HIT y QT-32 Cover for directional uplight HIT and QT-32</p> máx 500 Kg	93.06.40.2	■

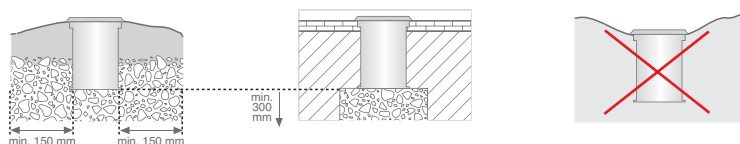

Se recomienda una capa de grava, alrededor de la caja del uplight, para un drenaje correcto. Evite su colocación en depresiones del terreno.

It is recommended a crushed stone surrounding all around the uplight box for a correct drainage. Avoid its placing in ground depression.