

Padlocks



| | | | |
|--|-----|--------------------------------|-----|
| CISA Logo line brass padlocks | 119 | TSP steel padlocks..... | 131 |
| Rectangular brass padlocks CISA Logo Line..... | 120 | ASTRAL steel padlocks | 132 |
| Marine Type padlocks CISA Logo Line..... | 121 | AP3 steel padlocks | 133 |
| CISA Logo Line padlocks with steel sleeve..... | 122 | RS3 steel padlocks..... | 134 |
| Brass padlocks | 123 | Padlock merchandisers | 135 |
| Marine Type padlocks..... | 125 | Accessories for padlocks | 136 |
| Rectangular brass padlocks..... | 127 | Spare parts for padlocks | 138 |
| Lim steel padlocks | 128 | Spare parts for padlocks | 139 |
| SP steel padlocks..... | 130 | | |





Technical features:


- Belt sanded solid brass body
- Nickel-plated, carbonitrided steel shackle
- Shackle double-locking system (item 1.21010.20/25.0 excluded)

Supplied as standard:

- 2 keys




| Type | Description | A | C | D | L | S | Pins | Key item | Unit weight | Pieces | ITEM | | | |
|------|-------------|---|---|---|---|---|------|----------|-----------------|------------|------|------|------|------|
| | | | | | | | | | | | Type | Dim. | Hand | Fin. |



• Standard shackle

| | | | | | | | | | |
|----|------|------|------|------|---|--------------|-------|----|--------------|
| 20 | 9,6 | 3,5 | 11,3 | 10,4 | 3 | 1 01040 01 1 | 0,039 | 12 | 1 21010 20 0 |
| 25 | 13,5 | 3,9 | 13,1 | 12,0 | 4 | 1 01040 02 1 | 0,062 | 12 | 1 21010 25 0 |
| 30 | 16,2 | 4,7 | 16,9 | 13,8 | 4 | 1 01040 03 1 | 0,095 | 12 | 1 21010 30 0 |
| 40 | 22,1 | 6,3 | 22,4 | 13,8 | 5 | 1 01040 04 1 | 0,158 | 12 | 1 21010 40 0 |
| 50 | 27,9 | 7,9 | 28,7 | 17,0 | 5 | 1 01040 05 1 | 0,272 | 6 | 1 21010 50 0 |
| 60 | 33,5 | 9,5 | 34,7 | 17,2 | 5 | 1 01040 05 1 | 0,407 | 6 | 1 21010 60 0 |
| 70 | 40,0 | 12,0 | 44,0 | 19,5 | 5 | 1 01040 05 1 | 0,560 | 6 | 1 21010 70 0 |

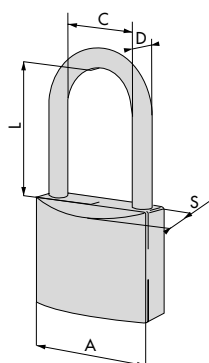

• Long shackle

| | | | | | | | | | |
|----|------|-----|------|------|---|--------------|-------|----|--------------|
| 30 | 16,2 | 4,7 | 24,0 | 13,8 | 4 | 1 01040 03 1 | 0,097 | 12 | 1 21011 30 0 |
| 40 | 22,1 | 6,3 | 40,0 | 13,8 | 5 | 1 01040 04 1 | 0,165 | 12 | 1 21011 40 0 |
| 50 | 27,9 | 7,9 | 80,0 | 17,0 | 5 | 1 01040 05 1 | 0,317 | 6 | 1 21011 50 0 |



Technical features:


- Belt sanded solid brass body
- Nickel-plated hardened steel shackle with tear-resistant end

Supplied as standard:

- 2 keys



| Type | Description | | | | | | Key item | Kg | Box | ITEM | | | |
|------|-------------|---|---|---|---|---|----------|----|-----|------|-------------|--------|------|
| | | A | C | D | L | S | | | | Pins | Unit weight | Pieces | Type |



| | | | | | | | | | |
|----|------|------|------|------|---|--------------|-------|---|--------------|
| 52 | 15,0 | 7,9 | 13,5 | 14,7 | 4 | 1 01040 03 1 | 0,197 | 6 | 1 21610 50 0 |
| 63 | 19,0 | 10,0 | 14,0 | 18,5 | 5 | 1 01040 04 1 | 0,330 | 6 | 1 21610 63 0 |
| 70 | 22,0 | 12,0 | 13,5 | 20,0 | 5 | 1 01040 04 1 | 0,439 | 6 | 1 21610 70 0 |
| 90 | 35,0 | 12,0 | 18,2 | 22,5 | 5 | 1 01040 05 1 | 0,728 | 6 | 1 21610 90 0 |




- Technical features:**
- Chrome-plated solid brass body
 - Stainless steel shackle
 - Shackle double-locking system

- Supplied as standard:**
- 2 keys




| Type | Description | A | C | D | L | S | Pins | Key item | Kg | Pieces | ITEM | | | |
|------|-------------|---|---|---|---|---|------|----------|----|--------|------|------|------|------|
| | | | | | | | | | | | Type | Dim. | Hand | Fin. |



- Standard shackle

| | | | | | | | | | |
|----|------|-----|------|------|---|--------------|-------|----|--------------|
| 29 | 14,5 | 4,7 | 13,8 | 12,8 | 4 | 1 01040 03 1 | 0,085 | 12 | 1 21710 30 0 |
| 40 | 19,5 | 6,3 | 22,5 | 13,5 | 4 | 1 01040 03 1 | 0,153 | 12 | 1 21710 40 0 |
| 50 | 28,2 | 7,1 | 26,0 | 14,8 | 5 | 1 01040 04 1 | 0,233 | 6 | 1 21710 50 0 |
| 60 | 31,3 | 7,9 | 32,2 | 16,1 | 5 | 1 01040 04 1 | 0,326 | 6 | 1 21710 60 0 |

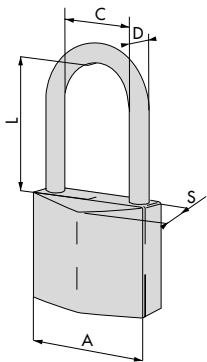

- Long shackle

| | | | | | | | | | |
|----|------|-----|------|------|---|--------------|-------|----|--------------|
| 40 | 19,5 | 6,3 | 40,0 | 13,5 | 4 | 1 01040 03 1 | 0,162 | 12 | 1 21711 40 0 |
|----|------|-----|------|------|---|--------------|-------|----|--------------|



Technical features:


- Brass solid body with nickel-plated hardened steel sleeve
- Nickel-plated hardened steel shackle
- Carbonitrided steel cylinder protection plate (item 1.21810.80.0)

Supplied as standard:

- 2 keys



| Type | Description | Key item | | | | | Unit weight | Pieces | ITEM | | | | | | |
|------|-------------|----------|------|------|------|------|-------------|--------------|-------|------|--------------|------|------|-------|-------|
| | | A | C | D | L | S | | | Pins | Type | Dim. | Hand | Fin. | Pers. | Spec. |
| | | 66 | 33,0 | 10,0 | 14,0 | 22,7 | 5 | 1 01040 04 1 | 0,598 | 3 | 1 21810 65 0 | | | | |
| | | 77 | 37,0 | 12,0 | 17,0 | 29,2 | 5 | 1 01040 05 1 | 0,843 | 3 | 1 21810 80 0 | | | | |






Technical features:

- Belt sanded solid brass body
- Nickel-plated, carbonitrided steel shackle
- Version with brass shackle also available
- Shackle double-locking system (item 1.22010.15/20 excluded)
- Picking resistant brass plate

Supplied as standard:

- 2 keys

| Type | Description | Key item | | | | | Unit weight | Pieces | ITEM | | | |
|------|-------------|----------|---|---|---|---|-------------|--------|------|------|------|------|
| | | A | C | D | L | S | | | Type | Dim. | Hand | Fin. |



• Standard shackle

| | | | | | | | | | |
|----|------|------|------|------|---|--------------|-------|----|--------------|
| 15 | 8,5 | 3,0 | 11,0 | 9,0 | 3 | 1 01510 00 1 | 0,022 | 12 | 1 22010 15 0 |
| 20 | 12,0 | 3,5 | 13,0 | 12,5 | 4 | 1 01440 00 1 | 0,052 | 12 | 1 22010 20 0 |
| 25 | 13,5 | 4,5 | 15,0 | 12,5 | 4 | 1 01440 00 1 | 0,065 | 12 | 1 22010 25 0 |
| 30 | 17,0 | 5,0 | 17,0 | 14,5 | 4 | 1 01430 00 1 | 0,095 | 12 | 1 22010 30 0 |
| 40 | 24,0 | 6,0 | 23,0 | 16,5 | 5 | 1 01410 00 1 | 0,172 | 12 | 1 22010 40 0 |
| 50 | 29,5 | 8,0 | 27,5 | 17,5 | 5 | 1 01310 00 1 | 0,292 | 6 | 1 22010 50 0 |
| 60 | 35,0 | 10,0 | 37,5 | 20,0 | 5 | 1 01310 00 1 | 0,460 | 6 | 1 22010 60 0 |
| 70 | 40,0 | 12,0 | 44,0 | 23,0 | 6 | 1 01210 00 2 | 0,715 | 6 | 1 22010 70 0 |

• ASTRAL cylinder


| | | | | | | | | | |
|----|------|-----|------|------|----|--------------|-------|---|--------------|
| 50 | 29,5 | 8,0 | 27,5 | 17,5 | 10 | 1 00620 01 0 | 0,313 | 6 | 1 22610 50 0 |
|----|------|-----|------|------|----|--------------|-------|---|--------------|

• Key removable in locked position only

| | | | | | | | | | |
|----|------|-----|------|------|---|--------------|-------|----|--------------|
| 30 | 17,0 | 5,0 | 17,0 | 14,5 | 4 | 1 01430 00 1 | 0,097 | 12 | 1 22012 30 0 |
| 40 | 24,0 | 6,0 | 23,0 | 16,5 | 5 | 1 01410 00 1 | 0,172 | 6 | 1 22012 40 0 |
| 50 | 29,5 | 8,0 | 27,5 | 17,5 | 5 | 1 01310 00 1 | 0,289 | 6 | 1 22012 50 0 |

• Brass shackle


| | | | | | | | | | |
|----|------|------|------|------|---|--------------|-------|----|--------------|
| 20 | 12,0 | 3,5 | 13,0 | 12,5 | 4 | 1 01440 00 1 | 0,052 | 12 | 1 22013 20 0 |
| 25 | 13,5 | 4,5 | 15,0 | 12,5 | 4 | 1 01440 00 1 | 0,070 | 12 | 1 22013 25 0 |
| 30 | 17,0 | 5,0 | 17,0 | 14,5 | 4 | 1 01430 00 1 | 0,096 | 12 | 1 22013 30 0 |
| 40 | 24,0 | 6,0 | 23,0 | 16,5 | 5 | 1 01410 00 1 | 0,173 | 12 | 1 22013 40 0 |
| 50 | 29,5 | 8,0 | 27,5 | 17,5 | 5 | 1 01310 00 1 | 0,291 | 6 | 1 22013 50 0 |
| 60 | 35,0 | 10,0 | 37,5 | 20,0 | 5 | 1 01310 00 1 | 0,467 | 6 | 1 22013 60 0 |
| 70 | 40,0 | 12,0 | 44,0 | 23,0 | 6 | 1 01210 00 2 | 0,723 | 6 | 1 22013 70 0 |

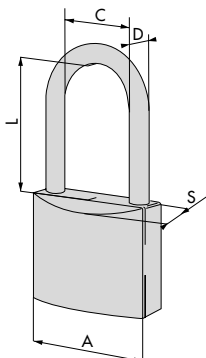

• Long shackle


| | | | | | | | | | |
|----|------|-----|-------|------|---|--------------|-------|----|--------------|
| 20 | 12,0 | 3,5 | 22,0 | 12,5 | 4 | 1 01440 00 1 | 0,053 | 12 | 1 22011 20 0 |
| 30 | 17,0 | 5,0 | 24,0 | 14,5 | 4 | 1 01430 00 1 | 0,098 | 12 | 1 22011 30 0 |
| 30 | 17,0 | 5,0 | 65,0 | 14,5 | 4 | 1 01430 00 1 | 0,111 | 12 | 1 22011 31 0 |
| 40 | 24,0 | 6,0 | 40,0 | 16,5 | 5 | 1 01410 00 1 | 0,183 | 12 | 1 22011 40 0 |
| 40 | 24,0 | 6,0 | 63,5 | 16,5 | 5 | 1 01410 00 1 | 0,191 | 12 | 1 22011 41 0 |
| 50 | 29,5 | 8,0 | 80,0 | 17,5 | 5 | 1 01310 00 1 | 0,345 | 6 | 1 22011 50 0 |
| 50 | 29,5 | 8,0 | 127,0 | 17,5 | 5 | 1 01310 00 1 | 0,381 | 6 | 1 22011 52 0 |

| Type | Description | Key item | | | | | Unit weight | Pieces | ITEM | | | |
|------|-------------|----------|---|---|---|---|-------------|--------|------|------|------|------|
| | | A | C | D | L | S | | | Type | Dim. | Hand | Fin. |

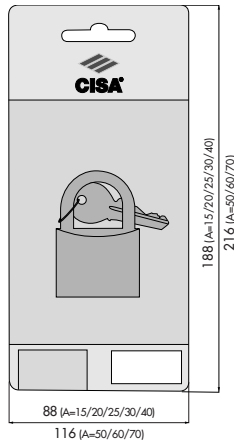

- Standard shackle
- Cardboard packing with transparent shrink-wrapping

| | | | | | | | | | |
|----|------|------|------|------|---|--------------|-------|----|--------------|
| 15 | 8,5 | 3,0 | 11,0 | 9,0 | 3 | 1 01510 00 1 | 0,022 | 12 | 1 22090 15 0 |
| 20 | 12,0 | 3,5 | 13,0 | 12,5 | 4 | 1 01440 00 1 | 0,066 | 12 | 1 22090 20 0 |
| 25 | 13,5 | 4,5 | 15,0 | 12,5 | 4 | 1 01440 00 1 | 0,079 | 12 | 1 22090 25 0 |
| 30 | 17,0 | 5,0 | 17,0 | 14,5 | 4 | 1 01430 00 1 | 0,108 | 12 | 1 22090 30 0 |
| 40 | 24,0 | 6,0 | 23,0 | 16,5 | 5 | 1 01410 00 1 | 0,182 | 12 | 1 22090 40 0 |
| 50 | 29,5 | 8,0 | 27,5 | 17,5 | 5 | 1 01310 00 1 | 0,315 | 6 | 1 22090 50 0 |
| 60 | 35,0 | 10,0 | 37,5 | 20,0 | 5 | 1 01310 00 1 | 0,480 | 6 | 1 22090 60 0 |
| 70 | 40,0 | 12,0 | 44,0 | 23,0 | 6 | 1 01210 00 2 | 0,713 | 6 | 1 22090 70 0 |

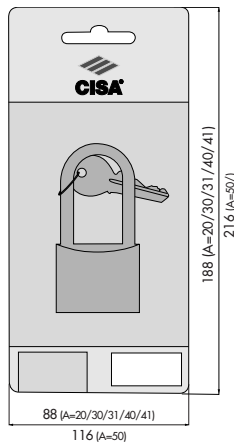

- Standard shackle
- Cardboard packing with transparent shrink-wrapping

| | | | | | | | | | |
|----|------|-----|------|------|---|--------------|-------|----|--------------|
| 20 | 12,0 | 3,5 | 22,0 | 12,5 | 4 | 1 01440 00 1 | 0,055 | 12 | 1 22091 20 0 |
| 30 | 17,0 | 5,0 | 24,0 | 14,5 | 4 | 1 01430 00 1 | 0,098 | 12 | 1 22091 30 0 |
| 30 | 17,0 | 5,0 | 65,0 | 14,5 | 4 | 1 01430 00 1 | 0,111 | 12 | 1 22091 31 0 |
| 40 | 24,0 | 6,0 | 40,0 | 16,5 | 5 | 1 01410 00 1 | 0,179 | 12 | 1 22091 40 0 |
| 40 | 24,0 | 6,0 | 63,5 | 16,5 | 5 | 1 01410 00 1 | 0,191 | 12 | 1 22091 41 0 |
| 50 | 29,5 | 8,0 | 80,0 | 17,5 | 5 | 1 01310 00 1 | 0,333 | 6 | 1 22091 50 0 |




Technical features:

- Chrome-plated solid brass body
- Stainless steel shackle
- Shackle double-locking system
- CISA patented anti-tampering protection device for the bolts
- Picking resistant chrome-plated brass plate

Supplied as standard:


- 2 keys

| Type | Description | Key item | | | | | Kg | Pieces | ITEM | | | |
|------|-------------|----------|---|---|---|---|----|--------|------|------|------|------|
| | | A | C | D | L | S | | | Type | Dim. | Hand | Fin. |




• Standard shackle

| | | | | | | | | | |
|----|------|------|------|------|---|--------------|-------|----|--------------|
| 30 | 17,0 | 5,0 | 17,0 | 14,5 | 4 | 1 01430 00 1 | 0,098 | 12 | 1 26020 30 0 |
| 40 | 24,0 | 6,0 | 23,0 | 16,5 | 5 | 1 01410 00 1 | 0,175 | 12 | 1 26020 40 0 |
| 50 | 29,5 | 8,0 | 27,5 | 17,5 | 5 | 1 00401 00 1 | 0,302 | 6 | 1 26020 50 0 |
| 60 | 35,0 | 10,0 | 37,5 | 20,0 | 5 | 1 00401 00 1 | 0,475 | 6 | 1 26020 60 0 |
| 50 | 29,5 | 8,0 | 27,5 | 17,5 | 5 | 1 01310 10 1 | 0,295 | 6 | 1 26022 50 0 |
| 60 | 35,0 | 10,0 | 37,5 | 20,0 | 5 | 1 01310 10 1 | 0,462 | 6 | 1 26022 60 0 |

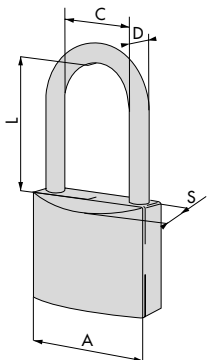

• Long shackle


| | | | | | | | | | |
|----|------|-----|------|------|---|--------------|-------|----|--------------|
| 40 | 24,0 | 6,0 | 40,0 | 16,5 | 5 | 1 01410 00 1 | 0,182 | 12 | 1 26021 40 0 |
|----|------|-----|------|------|---|--------------|-------|----|--------------|

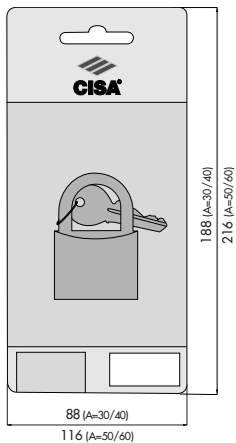

- Standard shackle
- Cardboard packing with transparent shrink-wrapping

| | | | | | | | | | |
|----|------|------|------|------|---|--------------|-------|----|--------------|
| 30 | 17,0 | 5,0 | 17,0 | 14,5 | 4 | 1 01430 00 1 | 0,109 | 12 | 1 26090 30 0 |
| 40 | 24,0 | 6,0 | 23,0 | 16,5 | 5 | 1 01410 00 1 | 0,185 | 12 | 1 26090 40 0 |
| 50 | 29,5 | 8,0 | 27,5 | 17,5 | 5 | 1 01310 10 1 | 0,295 | 6 | 1 26190 50 0 |
| 60 | 35,0 | 10,0 | 37,5 | 20,0 | 5 | 1 01310 10 1 | 0,462 | 6 | 1 26190 60 0 |

| Type | Description | Key item | | | | | Unit weight | Pieces | ITEM | | | | |
|------|-------------|----------|---|---|---|---|-------------|--------|-------|------|------|------|------|
| | | A | C | D | L | S | | | Plins | Type | Dim. | Hand | Fin. |

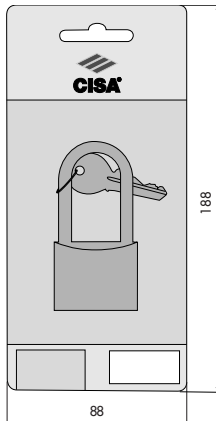

- Long shackle
- Cardboard packing with transparent shrink-wrapping

40 24,0 6,0 40,0 16,5 5 1 01410 00 1 0,182 12 1 26091 40 0




Technical features:

- Belt sanded solid brass body
- Nickel-plated hardened steel shackle, with tear-resistant end

Supplied as standard:


- 2 keys

| Type | Description | | | | | | Key item | Unit weight | Pieces | ITEM | | | |
|------|-------------|---|---|---|---|---|----------|-----------------|------------|------|------|------|------|
| | | A | C | D | L | S | | | | Type | Dim. | Hand | Fin. |



- Key removable in locked position only

| | | | | | | | | | |
|----|------|------|------|------|---|--------------|-------|---|--------------|
| 70 | 20,0 | 10,0 | 11,0 | 20,0 | 5 | 1 00401 00 1 | 0,519 | 6 | 1 26510 70 0 |
| 70 | 20,0 | 10,0 | 11,0 | 20,0 | 5 | 1 01310 10 1 | 0,513 | 6 | 1 26509 70 0 |
| 77 | 27,0 | 12,0 | 13,5 | 20,0 | 5 | 1 01310 10 1 | 0,587 | 6 | 1 26509 77 0 |
| 94 | 36,0 | 12,0 | 17,5 | 20,0 | 5 | 1 01310 10 1 | 0,799 | 6 | 1 26509 94 0 |

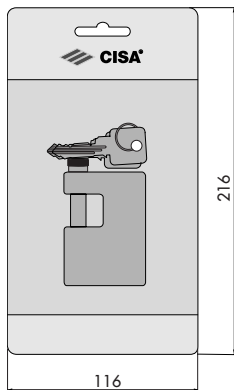

- Cardboard packing with transparent shrink-wrapping

| | | | | | | | | | |
|----|------|------|------|------|---|--------------|-------|---|--------------|
| 70 | 20,0 | 10,0 | 11,0 | 20,0 | 5 | 1 01310 10 1 | 0,513 | 6 | 1 26690 70 0 |
| 77 | 27,0 | 12,0 | 13,5 | 20,0 | 5 | 1 01310 10 1 | 0,587 | 6 | 1 26690 77 0 |
| 94 | 36,0 | 12,0 | 17,5 | 20,0 | 5 | 1 01310 10 1 | 0,799 | 6 | 1 26690 94 0 |



Technical features:

- 5 pins key biting systems
- Carbonitrided solid steel body, with chemical anti-corrosion nickel-plating treatment
- Hardened steel shackle, with chemical nickel-plating treatment
- The removable cylinder can be either rekeyed or replaced
- Carbonitrided steel plug protection plate
- Carbonitrided steel cylinder protection plate, with chemical nickel-plating treatment
- Desmopan impact resistant protection device (for the 28050 series)
- LIM patented key profile


Supplied as standard:

- 2 keys

On request:

- For personalized key section order series 28556 instead of series 28050 (i.e.: item 1.28556.75.0.00.00.PP)

| Type | Description | Key item | | | | | Kg | Pieces | ITEM | | | |
|------|-------------|----------|---|---|---|---|----|--------|------|------|------|-------------|
| | | A | C | D | L | S | | | Type | Dim. | Hand | Pers. Spec. |




- Key removable in locked position only

| | | | | | | | | | |
|----|------|------|------|------|---|--------------|-------|---|--------------|
| 55 | 25,0 | 11,0 | 25,0 | 25,0 | 5 | 1 00401 00 1 | 0,565 | 6 | 1 28050 55 0 |
| 55 | 25,0 | 11,0 | 45,0 | 25,0 | 5 | 1 00401 00 1 | 0,601 | 6 | 1 28050 56 0 |
| 55 | 26,0 | 11,0 | 65,0 | 25,0 | 5 | 1 00401 00 1 | 0,610 | 6 | 1 28050 57 0 |
| 70 | 31,0 | 14,0 | 25,0 | 26,0 | 5 | 1 00401 00 1 | 0,880 | 6 | 1 28050 70 0 |
| 70 | 31,0 | 14,0 | 45,0 | 26,0 | 5 | 1 00401 00 1 | 0,927 | 6 | 1 28050 71 0 |
| 70 | 31,0 | 14,0 | 65,0 | 26,0 | 5 | 1 00401 00 1 | 0,954 | 6 | 1 28050 72 0 |



- Clam packing

| | | | | | | | | | |
|----|------|------|------|------|---|--------------|-------|---|--------------|
| 55 | 25,0 | 11,0 | 25,0 | 25,0 | 5 | 1 00401 00 1 | 0,578 | 6 | 1 28055 55 0 |
| 55 | 25,0 | 11,0 | 45,0 | 25,0 | 5 | 1 00401 00 1 | 0,608 | 6 | 1 28055 56 0 |
| 55 | 26,0 | 11,0 | 65,0 | 25,0 | 5 | 1 00401 00 1 | 0,636 | 6 | 1 28055 57 0 |
| 70 | 31,0 | 14,0 | 25,0 | 26,0 | 5 | 1 00401 00 1 | 0,870 | 6 | 1 28055 70 0 |
| 70 | 31,0 | 14,0 | 45,0 | 26,0 | 5 | 1 00401 00 1 | 0,929 | 6 | 1 28055 71 0 |
| 70 | 31,0 | 14,0 | 65,0 | 26,0 | 5 | 1 00401 00 1 | 0,971 | 6 | 1 28055 72 0 |



- Key removable in locked position only


| | | | | | | | | | |
|----|------|------|------|------|---|--------------|-------|---|--------------|
| 62 | 25,0 | 11,0 | 25,0 | 25,0 | 5 | 1 00401 00 1 | 0,745 | 6 | 1 28350 62 0 |
| 73 | 31,0 | 14,0 | 28,0 | 28,0 | 5 | 1 00401 00 1 | 1,116 | 6 | 1 28350 73 0 |

| Type | Description | Key item | | | | | Kg | Unit weight | Pieces | ITEM | | | |
|------|-------------|----------|---|---|---|---|----|-------------|--------|------|------|------|------|
| | | A | C | D | L | S | | | | Pin | Type | Dim. | Hand |



• Clam packing

| | | | | | | | | | |
|----|------|------|------|------|---|--------------|-------|---|--------------|
| 62 | 25,0 | 11,0 | 25,0 | 25,0 | 5 | 1 00401 00 1 | 0,768 | 6 | 1 28355 62 0 |
| 73 | 31,0 | 14,0 | 28,0 | 28,0 | 5 | 1 00401 00 1 | 1,140 | 6 | 1 28355 73 0 |



| | | | | | | | | | |
|----|------|------|------|------|---|--------------|-------|---|--------------|
| 66 | 20,0 | 10,0 | 11,0 | 25,0 | 5 | 1 00401 00 1 | 0,685 | 6 | 1 28550 66 0 |
| 66 | 18,0 | 14,0 | 17,5 | 28,0 | 5 | 1 00401 00 1 | 0,837 | 6 | 1 28550 67 0 |
| 75 | 27,0 | 12,0 | 13,5 | 28,0 | 5 | 1 00401 00 1 | 0,852 | 6 | 1 28550 75 0 |
| 84 | 36,0 | 12,0 | 17,5 | 28,0 | 5 | 1 00401 00 1 | 0,970 | 6 | 1 28550 84 0 |
| 84 | 36,0 | 14,0 | 17,5 | 28,0 | 5 | 1 00401 00 1 | 0,983 | 6 | 1 28550 85 0 |



• Clam packing

| | | | | | | | | | |
|----|------|------|------|------|---|--------------|-------|---|--------------|
| 66 | 20,0 | 10,0 | 11,0 | 25,0 | 5 | 1 00401 00 1 | 0,745 | 6 | 1 28555 66 0 |
| 66 | 18,0 | 14,0 | 17,5 | 28,0 | 5 | 1 00401 00 1 | 0,855 | 6 | 1 28555 67 0 |
| 75 | 27,0 | 12,0 | 13,5 | 28,0 | 5 | 1 00401 00 1 | 0,905 | 6 | 1 28555 75 0 |
| 84 | 36,0 | 12,0 | 17,5 | 28,0 | 5 | 1 00401 00 1 | 1,018 | 6 | 1 28555 84 0 |
| 84 | 36,0 | 14,0 | 17,5 | 28,0 | 5 | 1 00401 00 1 | 1,009 | 6 | 1 28555 85 0 |



SP


Technical features:

- Patented system
- Registered key
- 10 (6 active + 4 passive) pins key biting systems
- Carbonitrided solid steel body, with chemical nickel-plating corrosion treatment
- Hardened steel shackle, with chemical nickel-plating treatment
- Carbonitrided steel cylinder protection plate, with chemical nickel-plating treatment
- The removable cylinder can be either rekeyed or replaced
- KEY
- In nickel silver alloy
- numbered on key bow

Supplied as standard:


- 2 keys
- CODE CARD

| Type | Description | Key item | | | | | | Unit weight | Pieces | ITEM | | | | |
|------|-------------|----------|---|---|---|---|------|-------------|--------|------|------|------|------|-------------|
| | | A | C | D | L | S | Pins | | | Type | Dim. | Hand | Fin. | Pers. Spec. |




• Key removable in locked position only

| | | | | | | | | | | | | | |
|----|------|------|------|------|---|--------------|-------|---|--------------|--|--|--|--|
| 55 | 25,0 | 11,0 | 25,0 | 25,0 | 6 | 1 00450 01 1 | 0,570 | 6 | 1 28052 55 0 | | | | |
| 55 | 25,0 | 11,0 | 45,0 | 25,0 | 6 | 1 00450 01 1 | 0,600 | 6 | 1 28052 56 0 | | | | |
| 55 | 26,0 | 11,0 | 65,0 | 25,0 | 6 | 1 00450 01 1 | 0,635 | 6 | 1 28052 57 0 | | | | |
| 70 | 31,0 | 14,0 | 25,0 | 26,0 | 6 | 1 00450 01 1 | 0,870 | 6 | 1 28052 70 0 | | | | |
| 70 | 31,0 | 14,0 | 45,0 | 26,0 | 6 | 1 00450 01 1 | 0,920 | 6 | 1 28052 71 0 | | | | |
| 70 | 31,0 | 14,0 | 65,0 | 26,0 | 6 | 1 00450 01 1 | 0,970 | 6 | 1 28052 72 0 | | | | |



• Key removable in locked position only

| | | | | | | | | | | | | | |
|----|------|------|------|------|---|--------------|-------|---|--------------|--|--|--|--|
| 62 | 25,0 | 11,0 | 25,0 | 25,0 | 6 | 1 00450 01 1 | 0,770 | 6 | 1 28352 62 0 | | | | |
| 73 | 31,0 | 14,0 | 28,0 | 28,0 | 6 | 1 00450 01 1 | 1,140 | 6 | 1 28352 73 0 | | | | |



| | | | | | | | | | | | | | |
|----|------|------|------|------|---|--------------|-------|---|--------------|--|--|--|--|
| 66 | 20,0 | 10,0 | 11,0 | 25,0 | 6 | 1 00450 01 1 | 0,691 | 6 | 1 28552 66 0 | | | | |
| 66 | 18,0 | 14,0 | 17,5 | 28,0 | 6 | 1 00450 01 1 | 0,720 | 6 | 1 28552 67 0 | | | | |
| 75 | 27,0 | 12,0 | 13,5 | 28,0 | 6 | 1 00450 01 1 | 0,870 | 6 | 1 28552 75 0 | | | | |
| 84 | 36,0 | 12,0 | 17,5 | 28,0 | 6 | 1 00450 01 1 | 0,985 | 6 | 1 28552 84 0 | | | | |
| 84 | 36,0 | 14,0 | 17,5 | 28,0 | 6 | 1 00450 01 1 | 1,000 | 6 | 1 28552 85 0 | | | | |



Technical features:

- Security Card: authorised duplication by Cisa or its authorized centres.
- 13 (6 +1 active + 6 passive) pins key biting systems
- Carbonitrided solid steel body, with chemical anti-corrosion nickel-plating treatment
- Hardened steel shackle, with chemical nickel-plating treatment
- Carbonitrided steel cylinder protection plate, with chemical nickel-plating treatment
- The removable cylinder can be either rekeyed or replaced

KEY:


- in nickel silver alloy
- numbered on key bow

Supplied as standard:

- 2 keys
- SECURITY CARD
- Key protected by shape registered trademark B02004C000170


TSP

| Type | Description | | | | | | Key item | Kg | Pieces | ITEM | | | |
|------|-------------|---|---|---|---|---|----------|----|--------|------|------|------|------|
| | | A | C | D | L | S | | | | Pins | Type | Dim. | Hand |




• Key removable in locked position only

| | | | | | | | | | |
|----|------|------|------|------|---|--------------|-------|---|--------------|
| 55 | 25,0 | 11,0 | 25,0 | 25,0 | 5 | 1 00500 00 1 | 0,570 | 6 | 1 28051 55 0 |
| 55 | 25,0 | 11,0 | 45,0 | 25,0 | 5 | 1 00500 00 1 | 0,600 | 6 | 1 28051 56 0 |
| 55 | 26,0 | 11,0 | 65,0 | 25,0 | 5 | 1 00500 00 1 | 0,635 | 6 | 1 28051 57 0 |
| 70 | 31,0 | 14,0 | 25,0 | 26,0 | 5 | 1 00500 00 1 | 0,870 | 6 | 1 28051 70 0 |
| 70 | 31,0 | 14,0 | 45,0 | 26,0 | 5 | 1 00500 00 1 | 0,920 | 6 | 1 28051 71 0 |
| 70 | 31,0 | 14,0 | 65,0 | 26,0 | 5 | 1 00500 00 1 | 0,970 | 6 | 1 28051 72 0 |



• Key removable in locked position only

| | | | | | | | | | |
|----|------|------|------|------|---|--------------|-------|---|--------------|
| 62 | 25,0 | 11,0 | 25,0 | 25,0 | 5 | 1 00500 00 1 | 0,770 | 6 | 1 28351 62 0 |
| 73 | 31,0 | 14,0 | 28,0 | 28,0 | 5 | 1 00500 00 1 | 1,140 | 6 | 1 28351 73 0 |



| | | | | | | | | | |
|----|------|------|------|------|---|--------------|-------|---|--------------|
| 66 | 20,0 | 10,0 | 11,0 | 25,0 | 5 | 1 00500 00 1 | 0,685 | 6 | 1 28551 66 0 |
| 66 | 18,0 | 14,0 | 17,5 | 28,0 | 5 | 1 00500 00 1 | 0,866 | 6 | 1 28551 67 0 |
| 75 | 27,0 | 12,0 | 13,5 | 28,0 | 5 | 1 00500 00 1 | 0,870 | 6 | 1 28551 75 0 |
| 84 | 36,0 | 12,0 | 17,5 | 28,0 | 5 | 1 00500 00 1 | 0,985 | 6 | 1 28551 84 0 |
| 84 | 36,0 | 14,0 | 17,5 | 28,0 | 5 | 1 00500 00 1 | 1,000 | 6 | 1 28551 85 0 |



Astral


Technical features:

- 10 (6 active + 4 passive) pins key biting system
- Carbonitrided solid steel body, with chemical anti-corrosion nickel-plating treatment
- Hardened steel shackle, with chemical nickel-plating treatment
- Carbonitrided steel cylinder protection plate, with chemical nickel-plating treatment
- The removable cylinder can be either rekeyed or replaced
- KEY:
- flat reversible keys
- in nickel-plated brass
- numbered on key bow

Supplied as standard:


- 2 keys
- Code Card

| Type | Description | Key item | | | | | Kg | Pieces | ITEM | | | |
|------|-------------|----------|---|---|---|---|----|--------|------|------|------|------|
| | | A | C | D | L | S | | | Pins | Type | Dim. | Hand |




• Key removable in locked position only

| | | | | | | | | | | | |
|----|------|------|------|------|----|--------------|-------|---|---|-------|------|
| 55 | 25,0 | 11,0 | 25,0 | 25,0 | 10 | 1 00620 01 0 | 0,553 | 6 | 1 | 28053 | 55 0 |
| 55 | 25,0 | 11,0 | 45,0 | 25,0 | 10 | 1 00620 01 0 | 0,586 | 6 | 1 | 28053 | 56 0 |
| 55 | 26,0 | 11,0 | 65,0 | 25,0 | 10 | 1 00620 01 0 | 0,610 | 6 | 1 | 28053 | 57 0 |
| 70 | 31,0 | 14,0 | 25,0 | 26,0 | 10 | 1 00620 01 0 | 0,854 | 6 | 1 | 28053 | 70 0 |
| 70 | 31,0 | 14,0 | 45,0 | 26,0 | 10 | 1 00620 01 0 | 0,903 | 6 | 1 | 28053 | 71 0 |
| 70 | 31,0 | 14,0 | 65,0 | 26,0 | 10 | 1 00620 01 0 | 0,954 | 6 | 1 | 28053 | 72 0 |



• Key removable in locked position only

| | | | | | | | | | | | |
|----|------|------|------|------|----|--------------|-------|---|---|-------|------|
| 62 | 25,0 | 11,0 | 25,0 | 25,0 | 10 | 1 00620 01 0 | 0,745 | 6 | 1 | 28353 | 62 0 |
| 73 | 31,0 | 14,0 | 28,0 | 28,0 | 10 | 1 00620 01 0 | 1,116 | 6 | 1 | 28353 | 73 0 |



| | | | | | | | | | | | |
|----|------|------|------|------|----|--------------|-------|---|---|-------|------|
| 66 | 20,0 | 10,0 | 11,0 | 25,0 | 10 | 1 00620 01 0 | 0,677 | 6 | 1 | 28553 | 66 0 |
| 66 | 18,0 | 14,0 | 17,5 | 28,0 | 10 | 1 00620 01 0 | 0,837 | 6 | 1 | 28553 | 67 0 |
| 75 | 27,0 | 12,0 | 13,5 | 28,0 | 10 | 1 00620 01 0 | 0,843 | 6 | 1 | 28553 | 75 0 |
| 84 | 36,0 | 12,0 | 17,5 | 28,0 | 10 | 1 00620 01 0 | 0,955 | 6 | 1 | 28553 | 84 0 |
| 84 | 36,0 | 14,0 | 17,5 | 28,0 | 10 | 1 00620 01 0 | 0,983 | 6 | 1 | 28553 | 85 0 |



AP3

Technical features:

- Patented system: key with incorporated mobile element
- Security Card: authorised duplication by Cisa or Cisa Solution Partner
- 12 pins (6+1 active, 5 passive) key biting system
- Carbonitrided solid steel body, with chemical nickel-plating corrosion treatment
- Hardened steel shackle, with chemical nickel-plating treatment
- Carbonitrided steel cylinder protection plate, with chemical nickel-plating treatment
- The removable cylinder can be either rekeyed or replaced


KEY:

- flat reversible keys, with incorporated mobile element
- in nickel silver alloy
- numbered on key bow

Supplied as standard:


- 2 keys
- SECURITY CARD

| Type | Description | Key item | | | | | Unit weight | Pieces | ITEM | | | |
|------|-------------|----------|---|---|---|---|-------------|--------|------|------|------|------|
| | | A | C | D | L | S | | | Type | Dim. | Hand | Fin. |




• Key removable in locked position only

| | | | | | | | | | | | |
|----|------|------|------|------|----|--------------|-------|---|---|-------|------|
| 55 | 25,0 | 11,0 | 25,0 | 25,0 | 15 | 1 00770 00 0 | 0,553 | 6 | 1 | 28058 | 55 0 |
| 55 | 25,0 | 11,0 | 45,0 | 25,0 | 15 | 1 00770 00 0 | 0,586 | 6 | 1 | 28058 | 56 0 |
| 55 | 26,0 | 11,0 | 65,0 | 25,0 | 15 | 1 00770 00 0 | 0,610 | 6 | 1 | 28058 | 57 0 |
| 70 | 31,0 | 14,0 | 25,0 | 26,0 | 15 | 1 00770 00 0 | 0,854 | 6 | 1 | 28058 | 70 0 |
| 70 | 31,0 | 14,0 | 45,0 | 26,0 | 15 | 1 00770 00 0 | 0,903 | 6 | 1 | 28058 | 71 0 |
| 70 | 31,0 | 14,0 | 65,0 | 26,0 | 15 | 1 00770 00 0 | 0,954 | 6 | 1 | 28058 | 72 0 |



• Key removable in locked position only

| | | | | | | | | | | | |
|----|------|------|------|------|----|--------------|-------|---|---|-------|------|
| 62 | 25,0 | 11,0 | 25,0 | 25,0 | 15 | 1 00770 00 0 | 0,745 | 6 | 1 | 28358 | 62 0 |
| 73 | 31,0 | 14,0 | 28,0 | 28,0 | 15 | 1 00770 00 0 | 0,745 | 6 | 1 | 28358 | 73 0 |



| | | | | | | | | | | | |
|----|------|------|------|------|----|--------------|-------|---|---|-------|------|
| 66 | 20,0 | 10,0 | 11,0 | 25,0 | 15 | 1 00770 00 0 | 0,677 | 6 | 1 | 28558 | 66 0 |
| 66 | 18,0 | 14,0 | 17,5 | 28,0 | 15 | 1 00770 00 0 | 0,837 | 6 | 1 | 28558 | 67 0 |
| 75 | 27,0 | 12,0 | 13,5 | 28,0 | 15 | 1 00770 00 0 | 0,843 | 6 | 1 | 28558 | 75 0 |
| 84 | 36,0 | 12,0 | 17,5 | 28,0 | 15 | 1 00770 00 0 | 0,995 | 6 | 1 | 28558 | 84 0 |
| 84 | 36,0 | 14,0 | 17,5 | 28,0 | 15 | 1 00770 00 0 | 0,974 | 6 | 1 | 28558 | 85 0 |



RS3 S

Technical features:


- Patented system: key with incorporated mobile element
- Security Card: authorised duplication by Cisa onyl
- Bitting system: 13 active pins arranged radially on three rows, up to 19 pins on 5 rows for master keying.
- Hardened steel pins and drivers.
- Stainless steel springs.
- Carbonitrided solid steel body, with chemical nickel-plating corrosion treatment
- Hardened steel shackle, with chemical nickel-plating treatment
- Carbonitrided steel cylinder protection plate, with chemical nickel-plating treatment

- The removable cylinder can be either rekeyed or replaced
- KEY
- flat reversible keys, with incorporated mobile element
- in nickel silver alloy
- numbered on key bow

Supplied as standard:


- 2 keys
- SECURITY CARD

| Type | Description | Key item | | | | | Unit weight | Pieces | ITEM | | | |
|------|-------------|----------|---|---|---|---|-------------|--------|------|------|------|------|
| | | A | C | D | L | S | | | Pins | Type | Dim. | Hand |




• Key removable in locked position only

| | | | | | | | | | | |
|----|------|------|------|------|----|--------------|-------|---|-----------------|----|
| 55 | 25,0 | 11,0 | 25,0 | 25,0 | 15 | 1 00800 00 0 | 0,553 | 6 | 1 28059 55 0 00 | CL |
| 55 | 25,0 | 11,0 | 45,0 | 25,0 | 15 | 1 00800 00 0 | 0,586 | 6 | 1 28059 56 0 00 | CL |
| 55 | 26,0 | 11,0 | 65,0 | 25,0 | 15 | 1 00800 00 0 | 0,610 | 6 | 1 28059 57 0 00 | CL |
| 70 | 31,0 | 14,0 | 25,0 | 26,0 | 15 | 1 00800 00 0 | 0,854 | 6 | 1 28059 70 0 00 | CL |
| 70 | 31,0 | 14,0 | 45,0 | 26,0 | 15 | 1 00800 00 0 | 0,903 | 6 | 1 28059 71 0 00 | CL |
| 70 | 31,0 | 14,0 | 65,0 | 26,0 | 15 | 1 00800 00 0 | 0,954 | 6 | 1 28059 72 0 00 | CL |




• Key removable in locked position only

| | | | | | | | | | | |
|----|------|------|------|------|----|--------------|-------|---|-----------------|----|
| 62 | 25,0 | 11,0 | 25,0 | 25,0 | 15 | 1 00800 00 0 | 0,745 | 6 | 1 28359 62 0 00 | CL |
| 73 | 31,0 | 14,0 | 28,0 | 28,0 | 15 | 1 00800 00 0 | 1,150 | 6 | 1 28359 73 0 00 | CL |




| | | | | | | | | | | |
|----|------|------|------|------|----|--------------|-------|---|-----------------|----|
| 66 | 20,0 | 10,0 | 11,0 | 25,0 | 15 | 1 00800 00 0 | 0,677 | 6 | 1 28559 66 0 00 | CL |
| 66 | 18,0 | 14,0 | 17,5 | 28,0 | 15 | 1 00800 00 0 | 0,837 | 6 | 1 28559 67 0 00 | CL |
| 75 | 27,0 | 12,0 | 13,5 | 28,0 | 15 | 1 00800 00 0 | 0,843 | 6 | 1 28559 75 0 00 | CL |
| 84 | 36,0 | 12,0 | 17,5 | 28,0 | 15 | 1 00800 00 0 | 0,995 | 6 | 1 28559 84 0 00 | CL |
| 84 | 36,0 | 14,0 | 17,5 | 28,0 | 15 | 1 00800 00 0 | 0,974 | 6 | 1 28559 85 0 00 | CL |

| Type | Description | Unit weight  | Pieces  | ITEM | | | |
|------|-------------|--|---|------|------|------|------|
| | | | | Type | Dim. | Hand | Fin. |

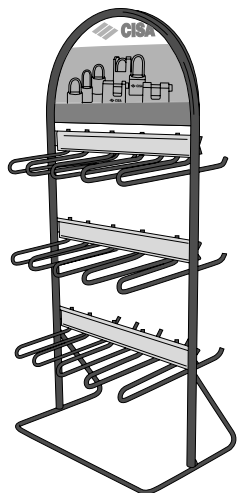


• Black painted empty steel display with 15 hooks

3,550 1 1 06601 80 0



• Black painted empty steel display with 10 hooks

1,750 1 1 06601 90 0

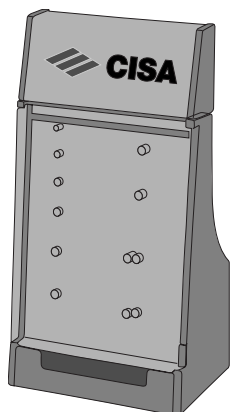


• Empty plexiglass display

4,800 0 1 06602 15 0


| Type | Description | For series/item | Unit weight Pieces | ITEM | | | | |
|------|--|---|-----------------------|------|-------|------|------|-------------|
| | | | | Type | Dim. | Hand | Fin. | Pers. Spec. |
| | <ul style="list-style-type: none"> • Zinc plated steel padlock hasp set | | 0,526 0 | 1 | 06300 | 14 | 0 | |
| | <ul style="list-style-type: none"> • Zinc plated steel padlock hasp set | | 0,515 0 | 1 | 06300 | 18 | 0 | |
| | <ul style="list-style-type: none"> • Zinc plated padlock tie | 1 21610 50 0, 1 21610 63 0, 1 21810 65 0, 1 26509 70 0, 1 26510 70 0, 1 28550 66 0, 1 28551 66 0, 1 28552 66 0, 1 28553 66 0, 1 28557 66 0, 1 28558 66 0 | 0,451 0 | 1 | 06301 | 50 | 0 | |
| | <ul style="list-style-type: none"> • Zinc plated padlock tie | 1 21610 50 0, 1 21610 63 0, 1 21810 65 0, 1 26509 70 0, 1 26510 70 0, 1 28550 66 0, 1 28551 66 0, 1 28552 66 0, 1 28553 66 0, 1 28557 66 0, 1 28558 66 0 | 0,591 0 | 1 | 06301 | 60 | 0 | |
| | <ul style="list-style-type: none"> • Zinc plated steel hasp for rolling doors, with flat bottom rail and removable dust cover | 1 21610 90 0, 1 21810 80 0, 1 26509 94 0, 1 26510 94 0, 1 28550 84 0, 1 28550 85 0, 1 28551 84 0, 1 28551 85 0, 1 28552 84 0, 1 28552 85 0, 1 28553 84 0, 1 28553 85 0, 1 28557 84 0, 1 28557 85 0, 1 28558 84 0, 1 28558 85 0 | 1,430 0 | 1 | 06302 | 25 | 0 | |

| Type | Description | For series/item | Unit weight Pieces | ITEM | | | |
|------|-------------|-----------------|-----------------------|------|------|------|------|
| | | | | Type | Dim. | Hand | Fin. |



- Zinc plated steel hasp for rolling doors, with flat bottom rail and removable dust cover

| | | | | | | |
|---------------|-------|---|--------------|--|--|--|
| 1 21610 90 0, | 1,490 | 0 | 1 06302 60 0 | | | |
| 1 21810 80 0, | | | | | | |
| 1 26509 94 0, | | | | | | |
| 1 26510 94 0, | | | | | | |
| 1 28550 84 0, | | | | | | |
| 1 28550 85 0, | | | | | | |
| 1 28551 84 0, | | | | | | |
| 1 28551 85 0, | | | | | | |
| 1 28552 84 0, | | | | | | |
| 1 28552 85 0, | | | | | | |
| 1 28553 84 0, | | | | | | |
| 1 28553 85 0, | | | | | | |
| 1 28557 84 0, | | | | | | |
| 1 28557 85 0, | | | | | | |
| 1 28558 84 0, | | | | | | |
| 1 28558 85 0 | | | | | | |













- Zinc plated steel hasp for up and over doors, with removable dust cover

| | | | | | | |
|---------------|-------|---|--------------|--|--|--|
| 1 21810 80 0, | 2,520 | 0 | 1 06303 00 0 | | | |
| 1 28550 85 0, | | | | | | |
| 1 28551 85 0, | | | | | | |
| 1 28552 85 0, | | | | | | |
| 1 28553 85 0, | | | | | | |
| 1 28557 85 0, | | | | | | |
| 1 28558 85 0 | | | | | | |

HARDENED STEEL PADLOCKS in "UNASSEMBLED" version (suffix 91), supplied without cylinder and drill resistant plates

- Steel padlocks in "UNASSEMBLED" version (suffix 91) are supplied without cylinder and without the cylinder or padlock drill resistant plate. When ordering the padlock cylinder, you have to specify separately the relevant padlock drill resistant plate (the cylinder drill resistant plate is supplied as standard).










| HARDENED SERIES | PLATE TYPE | "STANDARD" CYLINDER | "SP" CYLINDER | "TSP" CYLINDER | "ASTRAL" CYLINDER | "RS3 S" CYLINDER |
|--------------------------------------|---|--|--|--|--|----------------------|
| | | art. 1 02649 01 0 art. 1 07573 09 1/2 (*) | art. 1 02652 01 0 art. 1 07573 05 1/2 (*) | art. 1 02651 01 0 art. 1 07573 06 1/2 (*) | "AP3" CYLINDER art. 1 0A610 00 0 art. 1 0H610 00 0 | art. 1 0B610 00 0 |
| 28000 (Dim.55/56/67) | For cylinder  | Supplied as standard | Supplied as standard | Supplied as standard | Supplied as standard | Supplied as standard |
| | For padlock  | art. 1 07586 04 0 | art. 1 07586 06 1/2 | art. 1 07586 06 1/2 | art. 1 07586 08 0 | art. 1 07586 10 0 |
| 28300 (Dim.62) | For cylinder  | Supplied as standard | Supplied as standard | Supplied as standard | Supplied as standard | Supplied as standard |
| | For padlock  | art. 1 07586 05 0 | art. 1 07586 07 1/2 | art. 1 07586 07 1/2 | art. 1 07586 09 0 | art. 1 07586 11 0 |
| 28000 (Dim.70/71/72/73) | For cylinder  | Supplied as standard | Supplied as standard | Supplied as standard | Supplied as standard | Supplied as standard |
| | For padlock  | art. 1 07589 02 0 | art. 1 07589 03 1/2 | art. 1 07589 03 1/2 | art. 1 07589 04 0 | art. 1 07589 05 0 |
| 28300 (Dim.73) | For cylinder  | Supplied as standard | Supplied as standard | Supplied as standard | Supplied as standard | Supplied as standard |
| | For padlock  | art. 1 07589 02 0 | art. 1 07589 03 1/2 | art. 1 07589 03 1/2 | art. 1 07589 04 0 | art. 1 07589 05 0 |
| 28500 (Dim.66/67/75/84/85) | For cylinder  | Supplied as standard | Supplied as standard | Supplied as standard | Supplied as standard | Supplied as standard |
| | For padlock  | art. 1 07589 02 0 | art. 1 07589 03 1/2 | art. 1 07589 03 1/2 | art. 1 07589 04 0 | art. 1 07589 05 0 |

(*) Cylinders suitable for being rekeyed (you have to state the requested hand in the order)

N.B. For plates to be coupled to "SP" and "TSP" cylinders you have to state the hand. In this case, to avoid possible doubts, you also have to state the key code in the description (this can be taken from the 3 first figures on the key head).

Ex: 1 02652 01 0 + 1 07589 03 1 with SP key code. **102:**

("SP" cylinder complete with cylinder drill resistant plate and padlocks drill resistant plate, for right handed (1) keys, for padlocks art. 1 28550 66 0 00 91).

| Type | Description | Unit weight | Pieces | ITEM | | | |
|---|--|-------------|--------|------|-------|------|-----------------|
| | | | | Type | Dim. | Hand | Fin. Per. Spec. |
|  | <ul style="list-style-type: none"> Stainless steel shackle retaining sphere For padlocks: series 28000 dim. 55, 56, 57 series 28300 dim. 62 series 28500 | 0,025 | 10 | 1 | 07575 | 04 | 0 |
|  | <ul style="list-style-type: none"> Brass rotor For padlocks: series 28000 dim. 55, 56, 57 series 28300 dim. 62 | 0,035 | 3 | 1 | 07574 | 14 | 0 |
|  | <ul style="list-style-type: none"> Brass rotor For padlocks: series 28000 dim. 70, 71, 72 series 28300 dim. 73 | 0,075 | 3 | 1 | 07574 | 15 | 0 |
|  | <ul style="list-style-type: none"> Steel shackle retaining pin For padlocks: series 28500 | 0,007 | 5 | 1 | 07575 | 07 | 0 |
|  | <ul style="list-style-type: none"> Bronze spring for shackle retaining pin For padlocks: series 28500 dim. 66, 75 | 0,010 | 5 | 1 | 07575 | 08 | 0 |
|  | <ul style="list-style-type: none"> Brass rotor For padlocks: series 28500 dim. 66, 67 | 0,100 | 3 | 1 | 07575 | 16 | 0 |
|  | <ul style="list-style-type: none"> Brass rotor For padlocks: series 28500 dim. 75 | 0,135 | 3 | 1 | 07575 | 17 | 0 |
|  | <ul style="list-style-type: none"> Brass rotor For padlocks: series 28500 dim. 84, 85 | 0,170 | 3 | 1 | 07575 | 18 | 0 |
|  | <ul style="list-style-type: none"> Stainless steel plate retaining ball For padlocks: series 28500 | 0,015 | 10 | 1 | 07576 | 01 | 0 |

| Type | Description | Unit weight Pieces | ITEM | | | |
|------|--|-----------------------|------|-------|------|------------------|
| | | | Type | Dim. | Hand | Fin. Pers. Spec. |
| | <ul style="list-style-type: none"> • Carbonitrided steel shackle • For padlocks: series 28000 dim. 55 series 28300 dim. 62 | 0,070 1 | 1 | 07584 | 08 0 | |
| | <ul style="list-style-type: none"> • Carbonitrided steel shackle • For padlocks: series 28000 dim. 56 | 0,070 1 | 1 | 07584 | 09 0 | |
| | <ul style="list-style-type: none"> • Carbonitrided steel shackle • For padlocks: series 28000 dim. 57 | 0,070 1 | 1 | 07584 | 10 0 | |
| | <ul style="list-style-type: none"> • Carbonitrided steel shackle • For padlocks: series 28000 dim. 71 | 0,070 1 | 1 | 07584 | 12 0 | |
| | <ul style="list-style-type: none"> • Carbonitrided steel shackle • For padlocks: series 28000 dim. 72 | 0,070 1 | 1 | 07584 | 13 0 | |
| | <ul style="list-style-type: none"> • Protection plate steel fixing screw • For padlocks: series 28000 and 28300 | 0,025 3 | 3 | 07586 | 03 0 | |

| Type | Description | Unit weight | Pieces | ITEM | | | |
|------|--|----------------|--------|------|-------|------|-----------------|
| | | | | Type | Dim. | Hand | Fin. Per. Spec. |
| | <ul style="list-style-type: none"> • Hardened steel cylinder protection plate • For padlocks: series 28050 dim. 55, 56, 57 series 28350 dim. 62 | 0,045 | 3 | 1 | 07586 | 04 | 0 |
| | <ul style="list-style-type: none"> • Hardened steel cylinder protection plate • For padlocks: series 28050 dim. 70, 71, 72 series 28350 dim. 73 | 0,045 | 3 | 1 | 07586 | 05 | 0 |
| | <ul style="list-style-type: none"> • Hardened steel cylinder protection plate • For padlocks: series 28051 dim. 55, 56, 57 series 28351 dim. 62 series 28352 dim. 62 | 0,036 0,045 | 3 3 | 1 | 07586 | 06 | 1 2 |
| | <ul style="list-style-type: none"> • Hardened steel cylinder protection plate • For padlocks: series 28051 dim. 70, 71, 72 series 28351 dim. 73 series 28352 dim. 73 | 0,045 0,045 | 3 3 | 1 | 07586 | 07 | 1 2 |
| | <ul style="list-style-type: none"> • Hardened steel cylinder protection plate • For padlocks: series 28053 dim. 55, 56, 57 series 28353 dim. 62 | 0,045 | 3 | 1 | 07586 | 08 | 0 |
| | <ul style="list-style-type: none"> • Hardened steel cylinder protection plate • For padlocks: series 28053 dim. 70, 71, 72 series 28353 dim. 73 | 0,045 | 3 | 1 | 07586 | 09 | 0 |
| | <ul style="list-style-type: none"> • Hardened steel cylinder protection plate • For padlocks: series 28059 dim. 55, 56, 57 series 28359 dim. 62 | 0,045 | 3 | 1 | 07586 | 10 | 0 |
| | <ul style="list-style-type: none"> • Hardened steel cylinder protection plate • For padlocks: series 28059 dim. 55, 56, 57 series 28359 dim. 73 | 0,045 | 3 | 1 | 07586 | 11 | 0 |

| Type | Description | Unit weight Kg | Pieces | ITEM | | | | |
|------|---|-------------------|--------|------|-------|------|------|-------------|
| | | | | Type | Dim. | Hand | Fin. | Pers. Spec. |
| | <ul style="list-style-type: none"> • Protection plate fixing dowel • For padlocks: series 28500 dim. 66, 75 | 0,020 | 5 | 1 | 07587 | 04 | 0 | |
| | <ul style="list-style-type: none"> • Protection plate fixing dowel • For padlocks: series 28500 dim. 67, 84, 85 | 0,020 | 5 | 1 | 07587 | 05 | 0 | |
| | <ul style="list-style-type: none"> • Hardened steel cylinder protection plate • For padlocks: series 28550 | 0,010 | 3 | 1 | 07589 | 02 | 0 | |
| | <ul style="list-style-type: none"> • Hardened steel cylinder protection plate • For padlocks: series 28551, 28552 | 0,045 | 3 | 1 | 07589 | 03 | 1 | |
| | <ul style="list-style-type: none"> • Hardened steel cylinder protection plate • For padlocks: series 28553 | 0,003 | 3 | 1 | 07589 | 04 | 0 | |