



Luminarias para escayola modular

Luminaire for modular plasterboard

DO EM

ESCAYOLA MODULAR

MODULAR PLASTERBOARD



Carcasa

Chapa de acero pintada en blanco calidad poliéster. Luminaria con cerco, especialmente construida para escayola modular, evitando así la posibilidad de zonas sin cubrir. Recomendada también para techos cuya modulación sea 600x600 y no dispongan de perfiles, utilizando en este caso las garras (que se suministran) para su retención.

Difusor

Admite todos los difusores de la familia DO.

Aplicación

Instalaciones con techo de escayola modular.

Housing

White polyester painted steel chassis. Luminarie includes a frame specially constructed for modular plasterboard, thus covering the whole recess. It is also recommended for ceilings that have modules of 600x600 and do not have t-bars. In this case the luminarie is held in place by the fixing brackets provided with each fitting.

Louwer

It can be fitted with every DO family diffuser

Application


Installation for modular plasterboard ceilings.

FOTOMETRIA


PHOTOMETRY

DO EM VA 3x36



D. P. I. 75 Cd/div

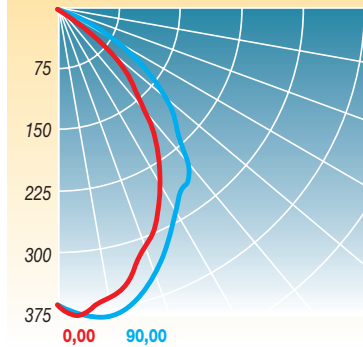

η	68,14 %
CIE:	67.4/96.1/99.7/100.00/68.14
DIN:	A60
UTE:	0,67C+0,00T

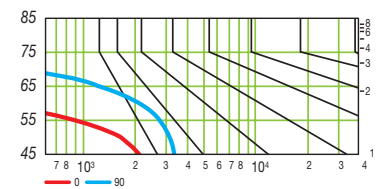

π	
G	(lx)
A	1.15 2000 1000 500 ≤ 300 - - - -
B	1.5 - 2000 1000 500 ≤ 300 - - - -
C	1.85 - - 2000 1000 500 ≤ 300 - - - -
D	2.2 - - - 2000 1000 500 ≤ 300 - - - -
E	2.55 - - - - 2000 1000 500 ≤ 300 - - - -
a	b c d e f g h

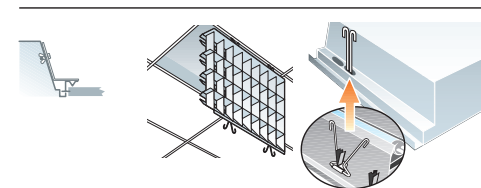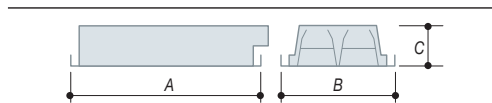

MOD	A	B	C	Kg.	Vol/m ³
DO-EM 4x18	625	625	98	6,0	0,047
DO-EM 3x18	625	625	98	5,9	0,047
DO-EM 2x18	625	325	98	3,3	0,022
DO-EM 4x36	1.225	625	98	10,6	0,090
DO-EM 3x36	1.225	625	98	9,6	0,090
DO-EM 2x36	1.225	325	98	6,0	0,046
DO-EM 2x58	1.577	325	98	8,6	0,075