



PERLA OP 0.95

PERLA OP 0.95




| PERLA OP 0.95 | BOARD | TEGULAR | MICROLOOK | SL2 |
|--------------------|--|--|--|--|
| | Prelude XL ² /TLX 24 mm Prelude Sixty ² | Prelude XL ² /TLX 24 mm Prelude Sixty ² | Prelude XL ² /TL 15 mm Interlude XL ² 15 mm | Prelude 24 mm Main Runner Prelude Sixty ² System Z |
| | | | | |
| Tiles | | | | |
| 600 x 600 x 15 mm | 3819 M | 3824 M | | |
| 675 x 675 x 15 mm | 3820 M | 3825 M | | |
| 600 x 1200 x 15 mm | 3821 M | | | |
| 600 x 600 x 20 mm | | | 3827 M | |
| 675 x 675 x 20 mm | | | 3828 M | |
| Planks | | | | |
| 600 x 1500 x 18 mm | 3092 M | | | |
| 600 x 1800 x 18 mm | 3093 M | | | |
| 300 x 1500 x 18 mm | | | | 3094 M |
| 300 x 1800 x 18 mm | | | | 3096 M |



EN ISO 354 & EN ISO 11654

| α_w | NRC | 125 | 250 | 500 | 1000 | 2000 | 4000 | Hz | |
|-------------|------|------|------|------|------|------|------|----|------------|
| • Tiles | | | | | | | | | |
| 0.95 | 0.90 | 0.45 | 0.80 | 0.95 | 0.90 | 1.00 | 1.00 | | α_p |
| • Planks | | | | | | | | | |
| 0.95 | 0.90 | 0.50 | 0.85 | 0.95 | 0.90 | 1.00 | 1.00 | | α_p |

Sound Absorption Class = A

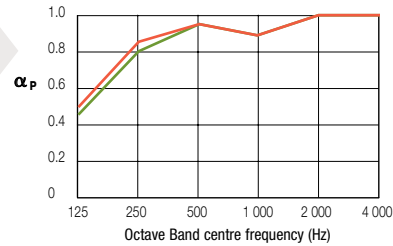

EN ISO 10848-2 & EN ISO 717-1

| | |
|------------------------|--|
| D_{nfw} | |
| 27 dB (SL2) | |
| 25 dB | |



EN ISO 140-3 & EN ISO 717-1

| | |
|-----------------------------|--|
| R_w | |
| 12 dB (Tiles) | |
| 10 dB (Board Planks) | |



EN 13501-1

EEA Euroclass A2-s1,d0



EN 12667 & ISO 8301

$\lambda = 0.036$ W/m K
 $\lambda = 0.037$ W/m K (Planks)



95 % RH



ISO 14644-1

ISO 5



15 YEAR guarantee



2.4 kg/m² (Board & Tegular Tiles)
3.3 kg/m² (Planks)
3.4 kg/m² (MicroLook Tiles)

* 30% Planks - 53% Tiles



Please contact our Armstrong Technical Sales Group for further details.

www.armstrong.eu

