


CORTINAS DE AIRE

AIR CURTAINS / RIDEAU D'AIR


| | A-13 | K-16 | K-18 |
|--|-------------------|--------------------|--------------------|
| MAXIMA ANCHURA PUERTA / MAX. DOOR WIDTH / LARGEUR PORTE MAX. | 1000 | 1600 | 2000 |
| MAXIMA ALTURA PUERTA / MAX. DOOR HEIGHT / HAUTEUR PORTE MAX. | 2500 | 2500 | 2500 |
| VELOCIDADES MOTOR / MOTOR SPEED / VITESSE MOTEUR | 3 | 3 | 3 |
| VELOCIDAD DEL AIRE M/S / AIR SPEED M/S / VITESSE DE L'AIR M/S | 9 / 8 / 6 | 9,5 / 8 / 7 | 9,5 / 8 / 7 |
| CAUDAL M ³ /H. / FLOW M ³ /H. / DÉBIT M ³ /H. | 1200 / 1030 / 790 | 1900 / 1670 / 1400 | 2330 / 2070 / 1680 |
| POTENCIA MOTOR W. / MOTOR POWER W. / PUISSANCE MOTEUR W. | 120 | 180 | 250 |
| R.P.M. / TR/MIN. | 1330 / 1135 / 850 | 1300 / 1250 / 1100 | 1310 / 1160 / 950 |
| TENSION V. / TENSION V. / VOLTAGE V. | 230 | 230 | 230 |
| D.B. (A). | 54 / 51 / 45 | 60 / 57 / 53 | 61 / 58 / 55 |

MEDIDAS SIZES DIMENSIONS

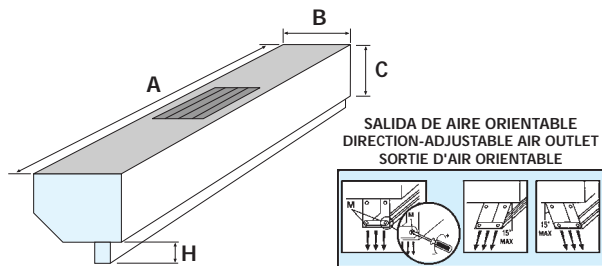


| | A-13 | K-16 | K-18 |
|---|------|------|------|
| A | 1070 | 1605 | 2005 |
| B | 166 | 160 | 160 |
| C | 171 | 230 | 230 |
| H | 64 | 64 | 64 |

MONTAJE ASSEMBLY MONTAGE



DARDO DE IMPULSION DRIVE SHAFT / FLÈCHE D'EXPULSION

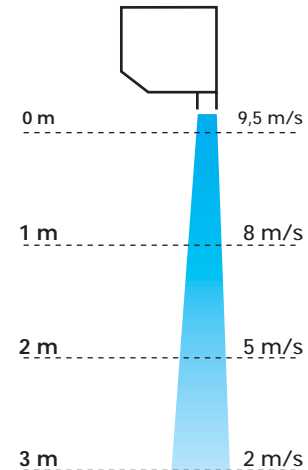


CORTINAS DE AIRE, CALEFACCION ELECTRICA

AIR CURTAINS, ELECTRIC HEATING / RIDEAU D'AIR, CHAUFFAGE ÉLECTRIQUE


| | AEH-13-F | KEH-16-F | KEH-18-F |
|--|-------------------|--------------------|--------------------|
| MAXIMA ANCHURA PUERTA / MAX. DOOR WIDTH / LARGEUR PORTE MAX. | 1000 | 1600 | 2000 |
| MAXIMA ALTURA PUERTA / MAX. DOOR HEIGHT / HAUTEUR PORTE MAX. | 2500 | 2500 | 2500 |
| VELOCIDADES MOTOR / MOTOR SPEED / VITESSE MOTEUR | 3 | 3 | 3 |
| VELOCIDAD DEL AIRE M/S / AIR SPEED M/S / VITESSE DE L'AIR M/S | 8,5 / 7,5 / 5,5 | 7,5 / 7 / 6 | 8,5 / 7,5 / 7 |
| CAUDAL M ³ /H. / FLOW M ³ /H. / DÉBIT M ³ /H. | 1100 / 930 / 700 | 1510 / 1400 / 1200 | 2200 / 1940 / 1800 |
| POTENCIA MOTOR W. / MOTOR POWER W. / PUISSANCE MOTEUR W. | 120 | 180 | 250 |
| R.P.M. / TR/MIN. | 1290 / 1100 / 870 | 1350 / 1290 / 1200 | 1350 / 1250 / 1180 |
| TENSION V. / TENSION V. / VOLTAGE V. | 230 / 400 | 230 / 400 | 230 / 400 |
| AMPERIOS MAX. / MAX. AMPS / AMPÈRES MAX. | 9 / 13,5 | 18 | 18 |
| BATERIA ELECTRICA KW. / ELECTRIC BATTERY KW. / BATTERIE ÉLECTRIQUE | 6 / 9 | 12 | 12 |
| SALTO TERMICO °C. / TEMPERATURE JUMP (IN °C) / SAUT THERMIQUE °C. | 28 / 35 / 39 | 25 / 30 / 33 | 16 / 18 / 21 |
| D.B. (A). | 54 / 50 / 43 | 56 / 54 / 50 | 59 / 55 / 52 |

MEDIDAS SIZES DIMENSIONS

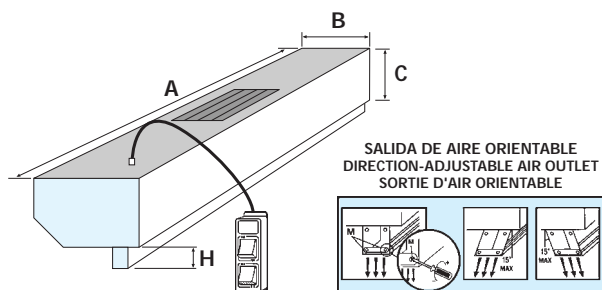

| | AEH-13 | KEH-16 | KEH-18 |
|---|--------|--------|--------|
| A | 1090 | 1605 | 2005 |
| B | 266 | 270 | 270 |
| C | 171 | 230 | 230 |
| H | 64 | 64 | 64 |

MONTAJE ASSEMBLY MONTAGE



DARDO DE IMPULSION DRIVE SHAFT / FLÈCHE D'EXPULSION

